APPENDIX 10



Whittier Residential Greenhouse Gas Analysis City of Whittier

PREPARED BY:

Haseeb Qureshi hqureshi@urbanxroads.com

Michael Tirohn mtirohn@urbanxroads.com

Ali Dadabhoy adadahoy@urbanxroads.com

JUNE 21, 2022

TABLE OF CONTENTS

TΑ	BLE O	F CONTENTS	
ΑF	PEND	ICES	5
		EXHIBITS	
		TABLES	
		ABBREVIATED TERMS	
EX	ECUTI	VE SUMMARY	10
	ES.1	Summary of Findings	
	ES.2	Project Requirements	
1	IN	TRODUCTION	
	1.1	Site Location	
	1.2	Project Description Error!	
2	CLI	IMATE CHANGE SETTING	5
	2.1	Introduction to Global Climate Change	5
	2.2	Global Climate Change Defined	
	2.3	Greenhouse Gases	5
	2.4	Global Warming Potential	12
	2.5	Greenhouse Gas Emissions Inventories	
	2.6	Effects of Climate Change in California	
	2.7	Regulatory Setting	
	2.8	Discussion on Establishment of Significance Thresholds	30
3	PR	OJECT GREENHOUSE GAS IMPACT	33
	3.1	Introduction	33
	3.2	Standards of Significance	
	3.3	California Emissions Estimator Model™ Employed To Analyze GHG Emiss	
	3.4	Life-Cycle Analysis Not Required	
	3.5	Construction Emissions	
	3.6	Operational Emissions	
	3.7	Emissions Summary	
	3.8	Greenhouse Gas Emissions Findings and Recommendations	
4		FERENCES	
5	CE	RTIFICATIONS	48



APPENDICES

APPENDIX 3.1: CALEEMOD EMISSIONS MODEL OUTPUTS

LIST OF EXHIBITS

EXHIBIT 1-A: LOCATION MAP	2
EXHIBIT 1-B: SITE PLANERROR! BOO	KMARK NOT DEFINED.
EXHIBIT 2-A: SUMMARY OF PROJECTED GLOBAL WARMING IMPACT, 2070-2099 (AS COMPARED WITH
1961-1990)	12
LIST OF TABLES	
TABLE ES-1: SUMMARY OF CEQA SIGNIFICANCE FINDINGS	10
TABLE 2-1: GREENHOUSE GASES	6
TABLE 2-2: GWP AND ATMOSPHERIC LIFETIME OF SELECT GHGS	13
TABLE 3-1: CONSTRUCTION DURATION	35
TABLE 3-2: CONSTRUCTION EQUIPMENT ASSUMPTIONS	36
TABLE 3-3 AMORTIZED ANNUAL CONSTRUCTION EMISSIONS	36
TABLE 3-4: PROJECT GHG EMISSIONS	38
TABLE 3-5: 2017 SCOPING PLAN CONSISTENCY SLIMMARY	39



LIST OF ABBREVIATED TERMS

% percent

°F degrees Fahrenheit

AB Assembly Bill

AB 1881 California Water Conservation in Landscaping Act of 2006

AB 32 Global Warming Solutions Act of 2006

ACC Advanced Clean Cars
C₂F₆ hexafluoroethane

C₂H₆ ethane

CAA Clean Air Act

CAFE Corporate Average Fuel Economy
CalEEMod California Emissions Estimator Model

CalEPA California Environmental Protection Agency

CALGAPS California LBNL GHG Analysis of Policies Spreadsheet

CALGreen California Green Building Standards Code
CalSTA California State Transportation Agency
Caltrans California Department of Transportation

CAP Climate Action Plan

CAPCOA California Air Pollution Control Officers Association

CARB California Air Resource Board
CCR California Code of Regulations

CDFA Department of Food and Agriculture

CEC California Energy Commission

CEQA California Environmental Quality Act

CFCs tetrafluoromethane
CFCs Chlorofluorocarbons

CH₂FCF 1,1,1,2-tetrafluoroethane

CH₃CF₂ 1,1-difluoroethane

CH₄ methane CHF₃ fluoroform

CNRA California Natural Resources Agency

CNRA 2009 2009 California Climate Adaptation Strategy

CO₂ carbon dioxide CO₂e CO₂ equivalent

CPUC California Public Utility Commission
CTC California Transportation Commission

EMFAC EMissions FACtor model



EPA U.S. Environmental Protection Agency

EV electric vehicles

GCC Global Climate Change

GHG greenhouse gas

GHGA Whittier Residential Greenhouse Gas Analysis

GO-Biz Governor's Office of Business and Economic Development

GWP global warming potential

HDT heavy-duty trucks
HFCs hydrofluorocarbons

IPCC Intergovernmental Panel on Climate Change

IRP Integrated Resource Planning

LBNL Lawrence Berkeley National Laboratory

lbs pounds

LCA life-cycle analysis

LCFS Low Carbon Fuel Standard

MD medium duty

MMT CO₂e million metric tons of CO₂e

Mpg miles per gallon
MT metric tons

MT CO₂ metric tons of CO₂e MT CO₂e/yr MT CO₂e per year

/yr per year MW megawatts

MWELO Model Water Efficient Landscape Ordinance

 $\begin{array}{ll} \text{MWh} & \text{MW-hour} \\ \text{MY} & \text{model year} \\ \text{N}_2\text{O} & \text{nitrous oxide} \end{array}$

NF₃ Nitrogen Trifluoride

NHTSA National Highway Traffic Safety Administration

NIOSH National Institute for Occupational Safety and Health

PFCs perfluorocarbons
Ppb parts per billion
Ppm parts per million
Ppt parts per trillion

Project Whittier Residential Project

SAFE Rule Safer Affordable Fuel-Efficient Vehicles Rule for Model Years

2021-2026 Passenger Cars and Light Trucks

SB Senate Bill



SB 1078 Renewable Portfolio Standards

SB 1368 Retail Provider Emissions Performance Standards
SB 32 California Global Warming Solutions Act of 2006

SCAB South Coast Air Basin

SCAQMD South Coast Air Quality Management District

SF₆ sulfur hexafluoride

SGC Strategic Growth Council

SP service population

U.S. Court United States Supreme Court

VMT vehicle miles traveled
WCI Western Climate Initiative
WRI World Resources Institute
ZEV zero-emission vehicles



This page intentionally left blank.



EXECUTIVE SUMMARY

ES.1 SUMMARY OF FINDINGS

The results of this Whittier Residential Greenhouse Gas Analysis (GHGA) is summarized below based on the significance criteria in Section 3 of this report consistent with Appendix G of the California Environmental Quality Act (CEQA) Guidelines (1). Table ES-1 shows the findings of significance for potential greenhouse gas (GHG) impacts under CEQA.

TABLE ES-1: SUMMARY OF CEQA SIGNIFICANCE FINDINGS

Analysis	Report Section	Significance Findings	
Analysis		Unmitigated	Mitigated
GHG Impact #1: Would the Project generate direct or indirect GHG emission that would result in a significant impact on the environment?	3.8	Less Than Significant	N/A
GHG Impact #2: Would the Project conflict with any applicable plan, policy or regulation of an agency adopted for the purpose of reducing the emissions of GHGs?	3.8	Less Than Significant	N/A

ES.2 PROJECT REQUIREMENTS

The Project would be required to comply with regulations imposed by the State of California and the South Coast Air Quality Management District (SCAQMD) aimed at the reduction of air pollutant emissions. Those that are directly and indirectly applicable to the Project and that would assist in the reduction of GHG emissions include:

- Global Warming Solutions Act of 2006 (Assembly Bill (AB) 32) (2).
- Regional GHG Emissions Reduction Targets/Sustainable Communities Strategies (Senate Bill (SB) 375) (3).
- Pavley Fuel Efficiency Standards (AB 1493). Establishes fuel efficiency ratings for new vehicles (4).
- California Building Code (Title 24 California Code of Regulations (CCR)). Establishes energy efficiency requirements for new construction (5).
- Appliance Energy Efficiency Standards (Title 20 CCR). Establishes energy efficiency requirements for appliances (6).
- Low Carbon Fuel Standard (LCFS). Requires carbon content of fuel sold in California to be 10% (percent) less by 2020 (7).
- California Water Conservation in Landscaping Act of 2006 (AB 1881). Requires local agencies
 to adopt the Department of Water Resources updated Water Efficient Landscape Ordinance
 or equivalent by January 1, 2010, to ensure efficient landscapes in new development and
 reduced water waste in existing landscapes (8).



- Statewide Retail Provider Emissions Performance Standards (SB 1368). Requires energy generators to achieve performance standards for GHG emissions (9).
- Renewable Portfolio Standards (SB 1078 also referred to as RPS). Requires electric corporations to increase the amount of energy obtained from eligible renewable energy resources to 20 percent (%) by 2010 and 33% by 2020 (10).
- California Global Warming Solutions Act of 2006 (SB 32). Requires the state to reduce statewide GHG emissions to 40% below 1990 levels by 2030, a reduction target that was first introduced in Executive Order B-30-15 (11).

Promulgated regulations that will affect the Project's emissions are accounted for in the Project's GHG calculations provided in this report. In particular, AB 1493, LCFS, and RPS, and therefore are accounted for in the Project's emission calculations.



1 INTRODUCTION

This report presents the results of the Greenhouse Gas Analysis (GHGA) prepared by Urban Crossroads, Inc., for the proposed Whittier Residential Project (Project). The purpose of this GHGA is to evaluate Project-related construction and operational emissions and determine the level of GHG impacts as a result of constructing and operating the proposed Project.

1.1 SITE LOCATION

The proposed Whittier Residential ("Project") is located south of Philadelphia Street and west of Comstock Avenue in the City of Whittier. The Project's location in relation to the surrounding area is shown on Exhibit 1-A.

The Project site is generally surrounded by commercial, medical, and residential land uses, with the nearest residential land use is approximately 36 feet west of the Project site and the Whittier Hospital Women's Health Center is located 80 feet north of the Project site.

1.2 PROJECT DESCRIPTION

Exhibit 1-B illustrates the preliminary Project site plan. The proposed Project consists of the development of a 52-unit multifamily development within a single four-story building with units ranging from studios to two bedrooms.



EXHIBIT 1-A: LOCATION MAP

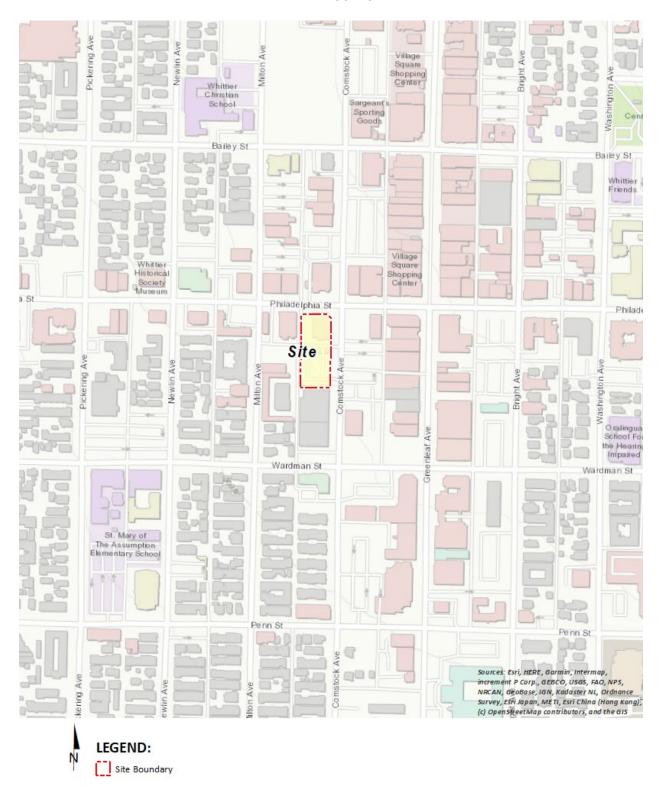




EXHIBIT 1-B: SITE PLAN





This page intentionally left blank.



2 CLIMATE CHANGE SETTING

2.1 Introduction to Global Climate Change

Global Climate Change (GCC) is defined as the change in average meteorological conditions on the earth with respect to temperature, precipitation, and storms. The majority of scientists believe that the climate shift taking place since the Industrial Revolution is occurring at a quicker rate and magnitude than in the past. Scientific evidence suggests that GCC is the result of increased concentrations of GHGs in the earth's atmosphere, including carbon dioxide (CO_2), methane (CH_4), nitrous oxide (N_2O), and fluorinated gases. The majority of scientists believe that this increased rate of climate change is the result of GHGs resulting from human activity and industrialization over the past 200 years.

An individual project like the proposed Project evaluated in this GHGA cannot generate enough GHG emissions to affect a discernible change in global climate. However, the proposed Project may participate in the potential for GCC by its incremental contribution of GHGs combined with the cumulative increase of all other sources of GHGs, which when taken together constitute potential influences on GCC. Because these changes may have serious environmental consequences, Section 3.0 will evaluate the potential for the proposed Project to have a significant effect upon the environment as a result of its potential contribution to the greenhouse effect.

2.2 GLOBAL CLIMATE CHANGE DEFINED

GCC refers to the change in average meteorological conditions on the earth with respect to temperature, wind patterns, precipitation, and storms. Global temperatures are regulated by naturally occurring atmospheric gases such as water vapor, CO_2 , N_2O , CH_4 , hydrofluorocarbons (HFCs), perfluorocarbons (PFCs), and sulfur hexafluoride (SF₆). These particular gases are important due to their residence time (duration they stay) in the atmosphere, which ranges from 10 years to more than 100 years. These gases allow solar radiation into the earth's atmosphere, but prevent radioactive heat from escaping, thus warming the earth's atmosphere. GCC can occur naturally as it has in the past with the previous ice ages.

Gases that trap heat in the atmosphere are often referred to as GHGs. GHGs are released into the atmosphere by both natural and anthropogenic activity. Without the natural GHG effect, the earth's average temperature would be approximately 61 degrees Fahrenheit (°F) cooler than it is currently. The cumulative accumulation of these gases in the earth's atmosphere is considered to be the cause for the observed increase in the earth's temperature.

2.3 GREENHOUSE GASES

GREENHOUSE GASES AND HEALTH EFFECTS

GHGs trap heat in the atmosphere, creating a GHG effect that results in global warming and climate change. Many gases demonstrate these properties and as discussed in Table 2-1. For the purposes of this analysis, emissions of CO_2 , CH_4 , and N_2O were evaluated (see Table 3-1 later in



this report) because these gases are the primary contributors to GCC from development projects. Although there are other substances such as fluorinated gases that also contribute to GCC, these fluorinated gases were not evaluated as their sources are not well-defined and do not contain accepted emissions factors or methodology to accurately calculate these gases.

TABLE 2-1: GREENHOUSE GASES

Greenhouse Gases	Description	Sources	Health Effects
Water	Water is the most abundant, important, and variable GHG in the atmosphere. Water vapor is not considered a pollutant; in the atmosphere it maintains a climate necessary for life. Changes in its concentration are primarily considered to be a result of climate feedbacks related to the warming of the atmosphere rather than a direct result of industrialization. A climate feedback is an indirect, or secondary, change, either positive or negative, that occurs within the climate system in response to a forcing mechanism. The feedback loop in which water is involved is critically important to projecting future climate change.	The main source of water vapor is evaporation from the oceans (approximately 85%). Other sources include evaporation from other water bodies, sublimation (change from solid to gas) from sea ice and snow, and transpiration from plant leaves.	There are no known direct health effects related to water vapor at this time. It should be noted however that when some pollutants react with water vapor, the reaction forms a transport mechanism for some of these pollutants to enter the human body through water vapor.
	As the temperature of the atmosphere rises, more water is evaporated from ground storage (rivers, oceans, reservoirs, soil). Because the air is warmer, the relative humidity can be higher (in essence, the air is able to 'hold' more water when it is warmer), leading to more water vapor in the atmosphere. As a GHG, the higher concentration of water vapor is then able to absorb more thermal indirect energy radiated from the Earth, thus further warming the atmosphere. The warmer atmosphere can then hold		



TABLE 2-1: GREENHOUSE GASES

Greenhouse Gases	Description	Sources	Health Effects
	more water vapor and so on and so on. This is referred to as a "positive feedback loop." The extent to which this positive feedback loop will continue is unknown as there are also dynamics that hold the positive feedback loop in check. As an example, when water vapor increases in the atmosphere, more of it will eventually condense into clouds, which are more able to reflect incoming solar radiation (thus allowing less energy to reach the earth's surface and heat it up) (12).		
CO ₂	CO ₂ is an odorless and colorless GHG. Since the industrial revolution began in the mid-1700s, the sort of human activity that increases GHG emissions has increased dramatically in scale and distribution. Data from the past 50 years suggests a corollary increase in levels and concentrations. As an example, prior to the industrial revolution, CO ₂ concentrations were fairly stable at 280 parts per million (ppm). Today, they are around 370 ppm, an increase of more than 30%. Left unchecked, the concentration of CO ₂ in the atmosphere is projected to increase to a minimum of 540 ppm by 2100 as a direct result of anthropogenic sources (13).	CO ₂ is emitted from natural and manmade sources. Natural sources include: the decomposition of dead organic matter; respiration of bacteria, plants, animals, and fungus; evaporation from oceans; and volcanic outgassing. Anthropogenic sources include: the burning of coal, oil, natural gas, and wood. CO ₂ is naturally removed from the air by photosynthesis, dissolution into ocean water, transfer to soils and ice caps, and chemical weathering of carbonate rocks (14).	Outdoor levels of CO ₂ are not high enough to result in negative health effects. According to the National Institute for Occupational Safety and Health (NIOSH) high concentrations of CO ₂ can result in health effects such as: headaches, dizziness, restlessness, difficulty breathing, sweating, increased heart rate, increased cardiac output, increased blood pressure, coma, asphyxia, and/or convulsions. It should be noted that current concentrations of CO ₂ in the earth's atmosphere are estimated to be approximately 370 ppm, the actual reference exposure level (level at which adverse health effects typically occur) is at exposure levels of 5,000



TABLE 2-1: GREENHOUSE GASES

Greenhouse Gases	Description	Sources	Health Effects
			ppm averaged over 10 hours in a 40-hour workweek and short-term reference exposure levels of 30,000 ppm averaged over a 15 minute period (15).
CH ₄	CH ₄ is an extremely effective absorber of radiation, although its atmospheric concentration is less than CO ₂ and its lifetime in the atmosphere is brief (10-12 years), compared to other GHGs.	CH ₄ has both natural and anthropogenic sources. It is released as part of the biological processes in low oxygen environments, such as in swamplands or in rice production (at the roots of the plants). Over the last 50 years, human activities such as growing rice, raising cattle, using natural gas, and mining coal have added to the atmospheric concentration of CH ₄ . Other anthropocentric sources include fossil-fuel combustion and biomass burning (16).	CH ₄ is extremely reactive with oxidizers, halogens, and other halogen-containing compounds. Exposure to high levels of CH ₄ can cause asphyxiation, loss of consciousness, headache and dizziness, nausea and vomiting, weakness, loss of coordination, and an increased breathing rate.
N₂O	N_2O , also known as laughing gas, is a colorless GHG. Concentrations of N_2O also began to rise at the beginning of the industrial revolution. In 1998, the global concentration was 314 parts per billion (ppb).	N ₂ O is produced by microbial processes in soil and water, including those reactions which occur in fertilizer containing nitrogen. In addition to agricultural sources, some industrial processes (fossil fuel-fired power	N ₂ O can cause dizziness, euphoria, and sometimes slight hallucinations. In small doses, it is considered harmless. However, in some cases, heavy and extended use can cause Olney's Lesions (brain damage) (17).



TABLE 2-1: GREENHOUSE GASES

Greenhouse Gases	Description	Sources	Health Effects
		plants, nylon production, nitric acid production, and vehicle emissions) also contribute to its atmospheric load. It is used as an aerosol spray propellant, i.e., in whipped cream bottles. It is also used in potato chip bags to keep chips fresh. It is used in rocket engines and in race cars. N ₂ O can be transported into the stratosphere, be deposited on the earth's surface, and be converted to other compounds by chemical reaction (17).	
Chlorofluorocarbons (CFCs)	CFCs are gases formed synthetically by replacing all hydrogen atoms in CH_4 or ethane (C_2H_6) with chlorine and/or fluorine atoms. CFCs are nontoxic, nonflammable, insoluble and chemically unreactive in the troposphere (the level of air at the earth's surface).	CFCs have no natural source but were first synthesized in 1928. They were used for refrigerants, aerosol propellants and cleaning solvents. Due to the discovery that they are able to destroy stratospheric ozone, a global effort to halt their production was undertaken and was extremely successful, so much so that levels of the major CFCs are now remaining steady or declining. However, their long atmospheric lifetimes mean that	In confined indoor locations, working with CFC-113 or other CFCs is thought to result in death by cardiac arrhythmia (heart frequency too high or too low) or asphyxiation.



TABLE 2-1: GREENHOUSE GASES

Greenhouse Gases	Description	Sources	Health Effects
		some of the CFCs will remain in the atmosphere for over 100 years (18).	
HFCs	HFCs are synthetic, man-made chemicals that are used as a substitute for CFCs. Out of all the GHGs, they are one of three groups with the highest global warming potential (GWP). The HFCs with the largest measured atmospheric abundances are (in order), fluoroform (CHF ₃), 1,1,1,2-tetrafluoroethane (CH ₂ FCF), and 1,1-difluoroethane (CH ₃ CF ₂). Prior to 1990, the only significant emissions were of CHF ₃ . CH ₂ FCF emissions are increasing due to its use as a refrigerant.	HFCs are manmade for applications such as automobile air conditioners and refrigerants.	No health effects are known to result from exposure to HFCs.
PFCs	PFCs have stable molecular structures and do not break down through chemical processes in the lower atmosphere. High-energy ultraviolet rays, which occur about 60 kilometers above earth's surface, are able to destroy the compounds. Because of this, PFCs have exceedingly long lifetimes, between 10,000 and 50,000 years. Two common PFCs are tetrafluoromethane (CF ₄) and hexafluoroethane (C ₂ F ₆). The EPA estimates that concentrations of CF ₄ in the atmosphere are over 70 parts per trillion (ppt).	The two main sources of PFCs are primary aluminum production and semiconductor manufacture.	No health effects are known to result from exposure to PFCs.
SF ₆	SF ₆ is an inorganic, odorless, colorless, nontoxic, nonflammable gas. It also has the highest GWP of any gas evaluated (23,900) (19). The EPA indicates that	SF ₆ is used for insulation in electric power transmission and distribution equipment, in the magnesium industry,	In high concentrations in confined areas, the gas presents the hazard of suffocation because it displaces the oxygen needed for breathing.



TABLE 2-1: GREENHOUSE GASES

Greenhouse Gases	Description	Sources	Health Effects
	concentrations in the 1990s were about 4 ppt.	in semiconductor manufacturing, and as a tracer gas for leak detection.	
Nitrogen Trifluoride (NF3)	NF ₃ is a colorless gas with a distinctly moldy odor. The World Resources Institute (WRI) indicates that NF ₃ has a 100-year GWP of 17,200 (20).	NF₃ is used in industrial processes and is produced in the manufacturing of semiconductors, Liquid Crystal Display panels, types of solar panels, and chemical lasers.	Long-term or repeated exposure may affect the liver and kidneys and may cause fluorosis (21).

The potential health effects related directly to the emissions of CO₂, CH₄, and N₂O as they relate to development projects such as the proposed Project are still being debated in the scientific community. Their cumulative effects to GCC have the potential to cause adverse effects to human health. Increases in Earth's ambient temperatures would result in more intense heat waves, causing more heat-related deaths. Scientists also purport that higher ambient temperatures would increase disease survival rates and result in more widespread disease. Climate change will likely cause shifts in weather patterns, potentially resulting in devastating droughts and food shortages in some areas (22). Exhibit 2-A presents the potential impacts of global warming (23).



90% loss in Sierra snowpack 13°F 22-30 inches of sea level rise 3-4 times as many heat wave days in major urban centers 4-6 times as many heat-related deaths in major urban centers 2.5 times more critically dry years Hiaher · 20% increase in energy demand Warming Range Higher (8-10.5°F) Emissions 70–80% loss in Sierra snowpack Scenario 14–22 inches of sea level rise · 2.5-4 times as many heat wave days in major urban centers · 2-6 times as many heat-related deaths in major urban centers Medium-Medium 75–85% increase in days conducive to ozone formation* High Warming Range 2-2.5 times more critically dry years **Emissions** (5.5-8°F) Scenario 10% increase in electricity demand • 30% decrease in forest yields (pine) · 55% increase in the expected risk of large wildfires Lower Emissions Scenario Lower · 30-60% loss in Sierra snowpack Warming Range 6–14 inches of sea level rise (3-5.5°F) 2-2.5 times as many heat wave days in major urban centers 2-3 times as many heat-related deaths in major urban centers 25–35% increase in days conducive to ozone formation* Up to 1.5 times more critically dry years 3-6% increase in electricity demand 7-14% decrease in forest yields (pine) 10-35% increase in the risk of large wildfires * For high ozone locations in Los Angeles (Riverside) and the San Joaquin Valley (Visalia)

EXHIBIT 2-A: SUMMARY OF PROJECTED GLOBAL WARMING IMPACT, 2070-2099 (AS COMPARED WITH 1961-1990)

Source: Barbara H. Allen-Diaz. "Climate change affects us all." University of California, Agriculture and Natural Resources, 2009.

2.4 GLOBAL WARMING POTENTIAL

GHGs have varying GWP values. GWP of a GHG indicates the amount of warming a gas causes over a given period of time and represents the potential of a gas to trap heat in the atmosphere. CO_2 is utilized as the reference gas for GWP, and thus has a GWP of 1. CO_2 equivalent (CO_2 e) is a term used for describing the difference GHGs in a common unit. CO_2 e signifies the amount of CO_2 which would have the equivalent GWP.

The atmospheric lifetime and GWP of selected GHGs are summarized at Table 2-2. As shown in the table below, GWP for the Second Assessment Report, the Intergovernmental Panel on Climate Change (IPCC)'s scientific and socio-economic assessment on climate change, range from 1 for CO_2 to 23,900 for SF_6 and GWP for the IPCC's 5^{th} Assessment Report range from 1 for CO_2 to 23,500 for SF_6 (24).



TABLE 2-2: GWP AND ATMOSPHERIC LIFETIME OF SELECT GHGS

_	Atmospheric Lifetime	Global Warming Potential (100-year time horizon)	
Gas	(years)	Second Assessment Report	5 th Assessment Report
CO ₂	See*	1	1
CH ₄	12 .4	21	28
N ₂ O	121	310	265
HFC-23	222	11,700	12,400
HFC-134a	13.4	1,300	1,300
HFC-152a	1.5	140	138
SF ₆	3,200	23,900	23,500

^{*}As per Appendix 8.A. of IPCC's 5th Assessment Report, no single lifetime can be given.

Source: Table 2.14 of the IPCC Fourth Assessment Report, 2007

2.5 Greenhouse Gas Emissions Inventories

STATE OF CALIFORNIA

California has significantly slowed the rate of growth of GHG emissions due to the implementation of energy efficiency programs as well as adoption of strict emission controls but is still a substantial contributor to the U.S. emissions inventory total (25). The California Air Resource Board (CARB) compiles GHG inventories for the State of California. Based upon the 2020 GHG inventory data (i.e., the latest year for which data are available) for the 2000-2018 In 2018, emissions from GHG emitting activities statewide were 425 million metric tons of carbon dioxide equivalent (MMT CO2e), 0.8 MMT CO₂e higher than 2017 levels and 6 MMT CO2e below the 2020 GHG Limit of 431 MMT CO2e. (MMT CO₂e/yr) (26).

2.6 EFFECTS OF CLIMATE CHANGE IN CALIFORNIA

PUBLIC HEALTH

Higher temperatures may increase the frequency, duration, and intensity of conditions conducive to air pollution formation. For example, days with weather conducive to ozone formation could increase from 25 to 35% under the lower warming range to 75 to 85% under the medium warming range. In addition, if global background ozone levels increase as predicted in some scenarios, it may become impossible to meet local air quality standards. Air quality could be further compromised by increases in wildfires, which emit fine particulate matter that can travel long distances, depending on wind conditions. The Climate Scenarios report indicates that large wildfires could become up to 55% more frequent if GHG emissions are not significantly reduced.

In addition, under the higher warming range scenario, there could be up to 100 more days per year with temperatures above 90°F in Los Angeles and 95°F in Sacramento by 2100. This is a large increase over historical patterns and approximately twice the increase projected if temperatures remain within or below the lower warming range. Rising temperatures could increase the risk of death from dehydration, heat stroke/exhaustion, heart attack, stroke, and respiratory distress caused by extreme heat.



WATER RESOURCES

A vast network of man-made reservoirs and aqueducts captures and transports water throughout the state from northern California rivers and the Colorado River. The current distribution system relies on Sierra Nevada snowpack to supply water during the dry spring and summer months. Rising temperatures, potentially compounded by decreases in precipitation, could severely reduce spring snowpack, increasing the risk of summer water shortages.

If temperatures continue to increase, more precipitation could fall as rain instead of snow, and the snow that does fall could melt earlier, reducing the Sierra Nevada spring snowpack by as much as 70 to 90%. Under the lower warming range scenario, snowpack losses could be only half as large as those possible if temperatures were to rise to the higher warming range. How much snowpack could be lost depends in part on future precipitation patterns, the projections for which remain uncertain. However, even under the wetter climate projections, the loss of snowpack could pose challenges to water managers and hamper hydropower generation. It could also adversely affect winter tourism. Under the lower warming range, the ski season at lower elevations could be reduced by as much as a month. If temperatures reach the higher warming range and precipitation declines, there might be many years with insufficient snow for skiing and snowboarding.

The State's water supplies are also at risk from rising sea levels. An influx of saltwater could degrade California's estuaries, wetlands, and groundwater aquifers. Saltwater intrusion caused by rising sea levels is a major threat to the quality and reliability of water within the southern edge of the Sacramento/San Joaquin River Delta – a major fresh water supply.

AGRICULTURE

Increased temperatures could cause widespread changes to the agriculture industry reducing the quantity and quality of agricultural products statewide. First, California farmers could possibly lose as much as 25% of the water supply needed. Although higher CO₂ levels can stimulate plant production and increase plant water-use efficiency, California's farmers could face greater water demand for crops and a less reliable water supply as temperatures rise. Crop growth and development could change, as could the intensity and frequency of pest and disease outbreaks. Rising temperatures could aggravate ozone pollution, which makes plants more susceptible to disease and pests and interferes with plant growth.

Plant growth tends to be slow at low temperatures, increasing with rising temperatures up to a threshold. However, faster growth can result in less-than-optimal development for many crops, so rising temperatures could worsen the quantity and quality of yield for a number of California's agricultural products. Products likely to be most affected include wine grapes, fruits, and nuts.

In addition, continued GCC could shift the ranges of existing invasive plants and weeds and alter competition patterns with native plants. Range expansion could occur in many species while range contractions may be less likely in rapidly evolving species with significant populations already established. Should range contractions occur, new or different weed species could fill the emerging gaps. Continued GCC could alter the abundance and types of many pests, lengthen pests' breeding season, and increase pathogen growth rates.



FORESTS AND LANDSCAPES

GCC has the potential to intensify the current threat to forests and landscapes by increasing the risk of wildfire and altering the distribution and character of natural vegetation. If temperatures rise into the medium warming range, the risk of large wildfires in California could increase by as much as 55%, which is almost twice the increase expected if temperatures stay in the lower warming range. However, since wildfire risk is determined by a combination of factors, including precipitation, winds, temperature, and landscape and vegetation conditions, future risks will not be uniform throughout the state. In contrast, wildfires in northern California could increase by up to 90% due to decreased precipitation.

Moreover, continued GCC has the potential to alter natural ecosystems and biological diversity within the state. For example, alpine and subalpine ecosystems could decline by as much as 60 to 80% by the end of the century as a result of increasing temperatures. The productivity of the state's forests has the potential to decrease as a result of GCC.

RISING SEA LEVELS

Rising sea levels, more intense coastal storms, and warmer water temperatures could increasingly threaten the state's coastal regions. Under the higher warming range scenario, sea level is anticipated to rise 22 to 35 inches by 2100. Elevations of this magnitude would inundate low-lying coastal areas with saltwater, accelerate coastal erosion, threaten vital levees and inland water systems, and disrupt wetlands and natural habitats. Under the lower warming range scenario, sea level could rise 12-14 inches.

2.7 REGULATORY SETTING

FEDERAL

Prior to the last decade, there have been no concrete federal regulations of GHGs or major planning for climate change adaptation. The following are actions regarding the federal government, GHGs, and fuel efficiency.

GHG Endangerment. In *Massachusetts v. Environmental Protection Agency* 549 U.S. 497 (2007), decided on April 2, 2007, the United States Supreme Court (U.S. Court) found that four GHGs, including CO₂, are air pollutants subject to regulation under Section 202(a)(1) of the Clean Air Act (CAA). The Court held that the EPA Administrator must determine whether emissions of GHGs from new motor vehicles cause or contribute to air pollution, which may reasonably be anticipated to endanger public health or welfare, or whether the science is too uncertain to make a reasoned decision. On December 7, 2009, the EPA Administrator signed two distinct findings regarding GHGs under section 202(a) of the CAA:

- Endangerment Finding: The Administrator finds that the current and projected concentrations of the six key well-mixed GHGs— CO₂, CH₄, N₂O, HFCs, PFCs, and SF₆—in the atmosphere threaten the public health and welfare of current and future generations.
- Cause or Contribute Finding: The Administrator finds that the combined emissions of these well-mixed GHGs from new motor vehicles and new motor vehicle engines contribute to the GHG pollution, which threatens public health and welfare.



These findings do not impose requirements on industry or other entities. However, this was a prerequisite for implementing GHG emissions standards for vehicles, as discussed in the section "Clean Vehicles" below. After a lengthy legal challenge, the U.S. Court declined to review an Appeals Court ruling that upheld the EPA Administrator's findings (27).

Clean Vehicles. Congress first passed the Corporate Average Fuel Economy law in 1975 to increase the fuel economy of cars and light duty trucks. The law has become more stringent over time. On May 19, 2009, President Obama put in motion a new national policy to increase fuel economy for all new cars and trucks sold in the U.S. On April 1, 2010, the EPA and the Department of Transportation's National Highway Traffic Safety Administration (NHTSA) announced a joint final rule establishing a national program that would reduce GHG emissions and improve fuel economy for new cars and trucks sold in the U.S.

The first phase of the national program applies to passenger cars, light-duty trucks, and medium-duty (MD) passenger vehicles, covering model years 2012 through 2016. They require these vehicles to meet an estimated combined average emissions level of 250 grams of CO₂ per mile, equivalent to 35.5 miles per gallon (mpg) if the automobile industry were to meet this CO₂ level solely through fuel economy improvements. Together, these standards would cut CO₂ emissions by an estimated 960 million metric tons and 1.8 billion barrels of oil over the lifetime of the vehicles sold under the program (model years 2012–2016). The EPA and the NHTSA issued final rules on a second-phase joint rulemaking establishing national standards for light-duty vehicles for model years 2017 through 2025 in August 2012. The new standards for model years 2017 through 2025 apply to passenger cars, light-duty trucks, and MD passenger vehicles. The final standards are projected to result in an average industry fleetwide level of 163 grams/mile of CO₂ in model year 2025, which is equivalent to 54.5 mpg if achieved exclusively through fuel economy improvements.

The EPA and the U.S. Department of Transportation issued final rules for the first national standards to reduce GHG emissions and improve fuel efficiency of heavy-duty trucks (HDT) and buses on September 15, 2011, effective November 14, 2011. For combination tractors, the agencies are proposing engine and vehicle standards that begin in the 2014 model year and achieve up to a 20% reduction in CO₂ emissions and fuel consumption by the 2018 model year. For HDT and vans, the agencies are proposing separate gasoline and diesel truck standards, which phase in starting in the 2014 model year and achieve up to a 10% reduction for gasoline vehicles and a 15% reduction for diesel vehicles by the 2018 model year (12 and 17% respectively if accounting for air conditioning leakage). Lastly, for vocational vehicles, the engine and vehicle standards would achieve up to a 10% reduction in fuel consumption and CO₂ emissions from the 2014 to 2018 model years.

On April 2, 2018, the EPA signed the Mid-term Evaluation Final Determination, which declared that the Model Year (MY) 2022-2025 GHG standards are not appropriate and should be revised (28). This Final Determination serves to initiate a notice to further consider appropriate standards for MY 2022-2025 light-duty vehicles. On August 2, 2018, the NHTSA in conjunction with the EPA, released a notice of proposed rulemaking, the *Safer Affordable Fuel-Efficient (SAFE) Vehicles Rule for Model Years 2021-2026 Passenger Cars and Light Trucks* (SAFE Rule). The SAFE Vehicles Rule was proposed to amend exiting Corporate Average Fuel Economy (CAFE) and tailpipe CO₂



standards for passenger cars and light trucks and to establish new standards covering model years 2021 through 2026. As of March 31, 2020, the NHTSA and EPA finalized the SAFE Rule which increased stringency of CAFE and CO_2 emissions standards by 1.5% each year through model year 2026 (29).

As of January 2021, Executive Order 13990 directed the U.S. Environmental Protection Agency (EPA) to reconsider the Agency's 2019 action titled "The Safer Affordable Fuel-Efficient Vehicles Rule Part One: One National Program Rule (SAFE-1)" for the purposes of rescinding the action taken by the prior administration. Therefore the U.S. EPA is seeking public comment on its reconsideration of the SAFE-1 and is reviewing public comment on the Notice of Reconsideration (30).

Mandatory Reporting of GHGs. The Consolidated Appropriations Act of 2008, passed in December 2007, requires the establishment of mandatory GHG reporting requirements. On September 22, 2009, the EPA issued the Final Mandatory Reporting of GHGs Rule, which became effective January 1, 2010. The rule requires reporting of GHG emissions from large sources and suppliers in the U.S. and is intended to collect accurate and timely emissions data to inform future policy decisions. Under the rule, suppliers of fossil fuels or industrial GHGs, manufacturers of vehicles and engines, and facilities that emit 25,000 metric tons (MT) per year (/yr) or more of GHG emissions are required to submit annual reports to the EPA.

New Source Review. The EPA issued a final rule on May 13, 2010, that establishes thresholds for GHGs that define when permits under the New Source Review Prevention of Significant Deterioration and Title V Operating Permit programs are required for new and existing industrial facilities. This final rule "tailors" the requirements of these CAA permitting programs to limit which facilities will be required to obtain Prevention of Significant Deterioration and Title V permits. In the preamble to the revisions to the Federal Code of Regulations, the EPA states:

"This rulemaking is necessary because without it the Prevention of Significant Deterioration and Title V requirements would apply, as of January 2, 2011, at the 100 or 250 tons per year levels provided under the CAA, greatly increasing the number of required permits, imposing undue costs on small sources, overwhelming the resources of permitting authorities, and severely impairing the functioning of the programs. EPA is relieving these resource burdens by phasing in the applicability of these programs to GHG sources, starting with the largest GHG emitters. This rule establishes two initial steps of the phase-in. The rule also commits the agency to take certain actions on future steps addressing smaller sources but excludes certain smaller sources from Prevention of Significant Deterioration and Title V permitting for GHG emissions until at least April 30, 2016."

The EPA estimates that facilities responsible for nearly 70% of the national GHG emissions from stationary sources will be subject to permitting requirements under this rule. This includes the nation's largest GHG emitters—power plants, refineries, and cement production facilities.

Standards of Performance for GHG Emissions for New Stationary Sources: Electric Utility Generating Units. As required by a settlement agreement, the EPA proposed new performance standards for emissions of CO₂ for new, affected, fossil fuel-fired electric utility generating units on March 27, 2012. New sources greater than 25 megawatts (MW) would be required to meet



an output-based standard of 1,000 pounds (lbs) of CO_2 per MW-hour (MWh), based on the performance of widely used natural gas combined cycle technology. It should be noted that on February 9, 2016, the U.S. Court issued a stay of this regulation pending litigation. Additionally, the current EPA Administrator has also signed a measure to repeal the Clean Power Plan, including the CO_2 standards. The Clean Power Plan was officially repealed on June 19, 2019, when the EPA issued the final Affordable Clean Energy rule. Under the Affordable Clean Energy rule, new state emission guidelines were established that provided existing coal-fired electric utility generating units with achievable standards.

Cap-and-Trade. Cap-and-trade refers to a policy tool where emissions are limited to a certain amount and can be traded or provides flexibility on how the emitter can comply. Successful examples in the U.S. include the Acid Rain Program and the N_2O Budget Trading Program and Clean Air Interstate Rule in the northeast. There is no federal GHG cap-and-trade program currently; however, some states have joined to create initiatives to provide a mechanism for cap-and-trade.

The Regional GHG Initiative is an effort to reduce GHGs among the states of Connecticut, Delaware, Maine, Maryland, Massachusetts, New Hampshire, New York, Rhode Island, and Vermont. Each state caps CO₂ emissions from power plants, auctions CO₂ emission allowances, and invests the proceeds in strategic energy programs that further reduce emissions, save consumers money, create jobs, and build a clean energy economy. The Initiative began in 2008 and in 2020 has retained all participating states.

The Western Climate Initiative (WCI) partner jurisdictions have developed a comprehensive initiative to reduce regional GHG emissions to 15% below 2005 levels by 2020. The partners were originally California, British Columbia, Manitoba, Ontario, and Quebec. However, Manitoba and Ontario are not currently participating. California linked with Quebec's cap-and-trade system January 1, 2014, and joint offset auctions took place in 2015. While the WCI has yet to publish whether it has successfully reached the 2020 emissions goal initiative set in 2007, SB 32, requires that California, a major partner in the WCI, adopt the goal of reducing statewide GHG emissions to 40% below the 1990 level by 2030.

SmartWay Program. The SmartWay Program is a public-private initiative between the EPA, large and small trucking companies, rail carriers, logistics companies, commercial manufacturers, retailers, and other federal and state agencies. Its purpose is to improve fuel efficiency and the environmental performance (reduction of both GHG emissions and air pollution) of the goods movement supply chains. SmartWay is comprised of four components (31):

- 1. SmartWay Transport Partnership: A partnership in which freight carriers and shippers commit to benchmark operations, track fuel consumption, and improve performance annually.
- 2. SmartWay Technology Program: A testing, verification, and designation program to help freight companies identify equipment, technologies, and strategies that save fuel and lower emissions.
- 3. SmartWay Vehicles: A program that ranks light-duty cars and small trucks and identifies superior environmental performers with the SmartWay logo.
- 4. SmartWay International Interests: Guidance and resources for countries seeking to develop freight sustainability programs modeled after SmartWay.



SmartWay effectively refers to requirements geared towards reducing fuel consumption. Most large trucking fleets driving newer vehicles are compliant with SmartWay design requirements. Moreover, over time, all HDTs will have to comply with the CARB GHG Regulation that is designed with the SmartWay Program in mind, to reduce GHG emissions by making them more fuel-efficient. For instance, in 2015, 53 foot or longer dry vans or refrigerated trailers equipped with a combination of SmartWay-verified low-rolling resistance tires and SmartWay-verified aerodynamic devices would obtain a total of 10% or more fuel savings over traditional trailers.

Through the SmartWay Technology Program, the EPA has evaluated the fuel saving benefits of various devices through grants, cooperative agreements, emissions and fuel economy testing, demonstration projects and technical literature review. As a result, the EPA has determined the following types of technologies provide fuel saving and/or emission reducing benefits when used properly in their designed applications, and has verified certain products:

- Idle reduction technologies less idling of the engine when it is not needed would reduce fuel consumption.
- Aerodynamic technologies minimize drag and improve airflow over the entire tractor-trailer vehicle. Aerodynamic technologies include gap fairings that reduce turbulence between the tractor and trailer, side skirts that minimize wind under the trailer, and rear fairings that reduce turbulence and pressure drop at the rear of the trailer.
- Low rolling resistance tires can roll longer without slowing down, thereby reducing the amount of fuel used. Rolling resistance (or rolling friction or rolling drag) is the force resisting the motion when a tire rolls on a surface. The wheel will eventually slow down because of this resistance.
- Retrofit technologies include things such as diesel particulate filters, emissions upgrades (to a higher tier), etc., which would reduce emissions.
- Federal excise tax exemptions.

CALIFORNIA

Legislative Actions to Reduce GHGs

The State of California legislature has enacted a series of bills that constitute the most aggressive program to reduce GHGs of any state in the nation. Some legislation such as AB 32 was specifically enacted to address GHG emissions. Other legislation such as Title 24 and Title 20 energy standards were originally adopted for other purposes such as energy and water conservation, but also provide GHG reductions. This section describes the major provisions of the legislation.

AB 32. The California State Legislature enacted AB 32, which required that GHGs emitted in California be reduced to 1990 levels by the year 2020 (this goal has been met¹). GHGs as defined under AB 32 include CO_2 , CH_4 , N_2O , HFCs, PFCs, and SF_6 . Since AB 32 was enacted, a seventh



 $^{^{1}}$ Based upon the 2019 GHG inventory data (i.e., the latest year for which data are available) for the 2000-2017 GHG emissions period, California emitted an average 424.1 MMT CO₂e (26). This is less than the 2020 emissions target of 431 MMT CO₂e.

chemical, nitrogen trifluoride, has also been added to the list of GHGs. The CARB is the state agency charged with monitoring and regulating sources of GHGs. AB 32 states the following:

"Global warming poses a serious threat to the economic well-being, public health, natural resources, and the environment of California. The potential adverse impacts of global warming include the exacerbation of air quality problems, a reduction in the quality and supply of water to the state from the Sierra snowpack, a rise in sea levels resulting in the displacement of thousands of coastal businesses and residences, damage to marine ecosystems and the natural environment, and an increase in the incidences of infectious diseases, asthma, and other human health-related problems."

SB 32. SB 32 requires the state to reduce statewide GHG emissions to 40% below 1990 levels by 2030, a reduction target that was first introduced in Executive Order B-30-15. The new legislation builds upon the AB 32 goal and provides an intermediate goal to achieving S-3-05, which sets a statewide GHG reduction target of 80% below 1990 levels by 2050. AB 197 creates a legislative committee to oversee regulators to ensure that CARB not only responds to the Governor, but also the Legislature (11).

CARB Scoping Plan Update. In November 2017, CARB released the *Final 2017 Scoping Plan Update*, which identifies the State's post-2020 reduction strategy. The *Final 2017 Scoping Plan Update* reflects the 2030 target of a 40% reduction below 1990 levels, set by Executive Order B-30-15 and codified by SB 32. Key programs that the proposed Second Update builds upon include the Cap-and-Trade Regulation, the LCFS, and much cleaner cars, trucks, and freight movement, utilizing cleaner, renewable energy, and strategies to reduce CH₄ emissions from agricultural and other wastes.

The *Final 2017 Scoping Plan Update* establishes a new emissions limit of 260 MMT CO₂e for the year 2030, which corresponds to a 40% decrease in 1990 levels by 2030 (32).

California's climate strategy will require contributions from all sectors of the economy, including the land base, and will include enhanced focus on zero- and near-zero-emission vehicle technologies; continued investment in renewables, including solar roofs, wind, and other distributed generation; greater use of low carbon fuels; integrated land conservation and development strategies; coordinated efforts to reduce emissions of short-lived climate pollutants (CH₄, black carbon, and fluorinated gases); and an increased focus on integrated land use planning to support livable, transit-connected communities and conservation of agricultural and other lands. Requirements for direct GHG reductions at refineries will further support air quality co-benefits in neighborhoods, including in disadvantaged communities historically located adjacent to these large stationary sources, as well as efforts with California's local districts to tighten emission limits on a broad spectrum of industrial sources. Major elements of the *Final 2017 Scoping Plan Update* framework include:

- Implementing and/or increasing the standards of the Mobile Source Strategy, which include increasing zero-emission vehicles (ZEV) buses and trucks.
- LCFS, with an increased stringency (18% by 2030).
- Implementing SB 350, which expands the RPS to 50% RPS and doubles energy efficiency savings by 2030.



- California Sustainable Freight Action Plan, which improves freight system efficiency, utilizes near-zero emissions technology, and deployment of ZEV trucks.
- Implementing the proposed Short-Lived Climate Pollutant Strategy, which focuses on reducing CH₄ and hydroflurocarbon emissions by 40% and anthropogenic black carbon emissions by 50% by year 2030.
- Continued implementation of SB 375.
- Post-2020 Cap-and-Trade Program that includes declining caps.
- 20% reduction in GHG emissions from refineries by 2030.
- Development of a Natural and Working Lands Action Plan to secure California's land base as a net carbon sink.

Note, however, that the Final 2017 Scoping Plan Update acknowledges that:

"[a]chieving net zero increases in GHG emissions, resulting in no contribution to GHG impacts, may not be feasible or appropriate for every project, however, and the inability of a project to mitigate its GHG emissions to net zero does not imply the project results in a substantial contribution to the cumulatively significant environmental impact of climate change under CEQA."

In addition to the statewide strategies listed above, the *Final 2017 Scoping Plan Update* also identifies local governments as essential partners in achieving the State's long-term GHG reduction goals and identifies local actions to reduce GHG emissions. As part of the recommended actions, CARB recommends that local governments achieve a community-wide goal to achieve emissions of no more than 6 metric tons of CO₂e (MT CO₂e) or less per capita by 2030 and 2 MT CO₂e or less per capita by 2050. For CEQA projects, CARB states that lead agencies may develop evidenced-based bright-line numeric thresholds—consistent with the Scoping Plan and the State's long-term GHG goals—and projects with emissions over that amount may be required to incorporate on-site design features and mitigation measures that avoid or minimize project emissions to the degree feasible; or a performance-based metric using a Climate Action Plan (CAP) or other plan to reduce GHG emissions is appropriate.

According to research conducted by the Lawrence Berkeley National Laboratory (LBNL) and supported by CARB, California, under its existing and proposed GHG reduction policies, could achieve the 2030 goals under SB 32. The research utilized a new, validated model known as the California LBNL GHG Analysis of Policies Spreadsheet (CALGAPS), which simulates GHG and criteria pollutant emissions in California from 2010 to 2050 in accordance to existing and future GHG-reducing policies. The CALGAPS model showed that by 2030, emissions could range from 211 to 428 MT CO₂e per year (MT CO₂e/yr), indicating that "even if all modeled policies are not implemented, reductions could be sufficient to reduce emissions 40% below the 1990 level [of SB 32]." CALGAPS analyzed emissions through 2050 even though it did not generally account for policies that might be put in place after 2030. Although the research indicated that the emissions would not meet the State's 80% reduction goal by 2050, various combinations of policies could allow California's cumulative emissions to remain very low through 2050 (33) (34).

Cap-and-Trade Program. The Scoping Plan identifies a Cap-and-Trade Program as one of the key strategies for California to reduce GHG emissions. According to CARB, a cap-and-trade program will help put California on the path to meet its goal of achieving a 40% reduction in GHG emissions



from 1990 levels by 2030. Under cap-and-trade, an overall limit on GHG emissions from capped sectors is established, and facilities subject to the cap will be able to trade permits to emit GHGs within the overall limit.

CARB adopted a California Cap-and-Trade Program pursuant to its authority under AB 32. The Cap-and-Trade Program is designed to reduce GHG emissions from regulated entities by more than 16% between 2013 and 2020, and by an additional 40% by 2030. The statewide cap for GHG emissions from the capped sectors (e.g., electricity generation, petroleum refining, and cement production) commenced in 2013 and will decline over time, achieving GHG emission reductions throughout the program's duration.

Covered entities that emit more than 25,000 MT CO_2e/yr must comply with the Cap-and-Trade Program. Triggering of the 25,000 MT CO_2e/yr "inclusion threshold" is measured against a subset of emissions reported and verified under the California Regulation for the Mandatory Reporting of GHG Emissions (Mandatory Reporting Rule).

Under the Cap-and-Trade Program, CARB issues allowances equal to the total amount of allowable emissions over a given compliance period and distributes these to regulated entities. Covered entities are allocated free allowances in whole or part (if eligible), and may buy allowances at auction, purchase allowances from others, or purchase offset credits. Each covered entity with a compliance obligation is required to surrender "compliance instruments" for each MT CO₂e of GHG they emit. There also are requirements to surrender compliance instruments covering 30% of the prior year's compliance obligation by November of each year (35).

The Cap-and-Trade Program provides a firm cap, which provides the highest certainty of achieving the 2030 target. An inherent feature of the Cap-and-Trade program is that it does not guarantee GHG emissions reductions in any discrete location or by any particular source. Rather, GHG emissions reductions are only guaranteed on an accumulative basis. As summarized by CARB in the *First Update to the Climate Change Scoping Plan*:

"The Cap-and-Trade Regulation gives companies the flexibility to trade allowances with others or take steps to cost-effectively reduce emissions at their own facilities. Companies that emit more have to turn in more allowances or other compliance instruments. Companies that can cut their GHG emissions have to turn in fewer allowances. But as the cap declines, aggregate emissions must be reduced. In other words, a covered entity theoretically could increase its GHG emissions every year and still comply with the Cap-and-Trade Program if there is a reduction in GHG emissions from other covered entities. Such a focus on aggregate GHG emissions is considered appropriate because climate change is a global phenomenon, and the effects of GHG emissions are considered cumulative." (36)

The Cap-and-Trade Program covered approximately 80% of California's GHG emissions (32). The Cap-and-Trade Program covers the GHG emissions associated with electricity consumed in California, whether generated in-state or imported. Accordingly, GHG emissions associated with CEQA projects' electricity usage are covered by the Cap-and-Trade Program. The Cap-and-Trade Program also covers fuel suppliers (natural gas and propane fuel providers and transportation fuel providers) to address emissions from such fuels and from combustion of other fossil fuels not directly covered at large sources in the Program's first compliance period. The Cap-and-Trade



Program covers the GHG emissions associated with the combustion of transportation fuels in California, whether refined in-state or imported.

SB 375 – the Sustainable Communities and Climate Protection Act of 2008. According to SB 375, the transportation sector is the largest contributor of GHG emissions, which emits over 40% of the total GHG emissions in California. SB 375 states, "Without improved land use and transportation policy, California will not be able to achieve the goals of AB 32." SB 375 does the following: it (1) requires metropolitan planning organizations to include sustainable community strategies in their regional transportation plans for reducing GHG emissions, (2) aligns planning for transportation and housing, and (3) creates specified incentives for the implementation of the strategies.

Concerning CEQA, SB 375, as codified in Public Resources Code Section 21159.28, states that CEQA findings for certain projects are not required to reference, describe, or discuss (1) growth inducing impacts, or (2) any project-specific or cumulative impacts from cars and light-duty truck trips generated by the project on global warming or the regional transportation network, if the project:

- 1. Is in an area with an approved sustainable communities strategy or an alternative planning strategy that the CARB accepts as achieving the GHG emission reduction targets.
- 2. Is consistent with that strategy (in designation, density, building intensity, and applicable policies).
- 3. Incorporates the mitigation measures required by an applicable prior environmental document.

AB 1493. California AB 1493 requires CARB to develop and adopt regulations that reduce GHGs emitted by passenger vehicles and light duty trucks. Implementation of the regulation was delayed by lawsuits filed by automakers and by the EPA's denial of an implementation waiver. The EPA subsequently granted the requested waiver in 2009, which was upheld by the U.S. District Court for the District of Columbia in 2011.

The standards phase in during the 2009 through 2016 model years. When fully phased in, the near-term (2009–2012) standards will result in about a 22% reduction compared with the 2002 fleet, and the mid-term (2013–2016) standards will result in about a 30% reduction. Several technologies stand out as providing significant reductions in emissions at favorable costs. These include discrete variable valve lift or camless valve actuation to optimize valve operation rather than relying on fixed valve timing and lift as has historically been done; turbocharging to boost power and allow for engine downsizing; improved multi-speed transmissions; and improved air conditioning systems that operate optimally, leak less, and/or use an alternative refrigerant.

The second phase of the implementation for the Pavley bill was incorporated into Amendments to the Low-Emission Vehicle Program or the Advanced Clean Cars program (ACC). The Advanced Clean Car program combines the control of smog-causing pollutants and GHG emissions into a single coordinated package of requirements for model years 2017 through 2025. The regulation will reduce GHGs from new cars by 34% from 2016 levels by 2025. The new rules will clean up gasoline and diesel-powered cars, and deliver increasing numbers of zero-emission technologies, such as full battery electric cars, newly emerging plug-in hybrid electric vehicles (EV) and hydrogen fuel cell cars. The package will also ensure adequate fueling infrastructure is available for the increasing numbers of hydrogen fuel cell vehicles planned for deployment in California.



SB 350— Clean Energy and Pollution Reduction Act of 2015. SB 350 requires an increase in the RPS, higher energy efficiency requirements for buildings, initial strategies towards a regional electricity grid, and improved infrastructure for EV charging stations. Provisions for a 50% reduction in the use of petroleum statewide were removed from the Bill because of opposition and concern that it would prevent the Bill's passage. Specifically, SB 350 requires the following to reduce statewide GHG emissions:

- Increase the amount of electricity procured from renewable energy sources from 33% to 50% by 2030, with interim targets of 40% by 2024, and 25% by 2027.
- Double the energy efficiency in existing buildings by 2030. This target will be achieved through the California Public Utility Commission (CPUC), the California Energy Commission (CEC), and local publicly owned utilities.
- Reorganize the Independent System Operator to develop more regional electrify transmission markets and to improve accessibility in these markets, which will facilitate the growth of renewable energy markets in the western United States.

EXECUTIVE ORDERS RELATED TO GHG EMISSIONS

California's Executive Branch has taken several actions to reduce GHGs through the use of Executive Orders. Although not regulatory, they set the tone for the state and guide the actions of state agencies.

Executive Order B-55-18 and SB 100. SB 100 raises California's RPS requirement to 50% renewable resources target by December 31, 2026, and to achieve a 60% target by December 31, 2030. SB 100 also requires that retail sellers and local publicly owned electric utilities procure a minimum quantity of electricity products from eligible renewable energy resources so that the total kilowatt hours of those products sold to their retail end-use customers achieve 44% of retail sales by December 31, 2024, 52% by December 31, 2027, and 60% by December 31, 2030. Executive Order B-55-18 establishes a carbon neutrality goal for the state of California by 2045; and sets a goal to maintain net negative emissions thereafter. The Executive Order directs the California Natural Resources Agency (CNRA), California Environmental Protection Agency (CalEPA), the Department of Food and Agriculture (CDFA), and CARB to include sequestration targets in the Natural and Working Lands Climate Change Implementation Plan consistent with the carbon neutrality goal.

Executive Order S-3-05. Executive Order S-3-05 set the following reduction targets for GHG emissions:

- By 2010, reduce GHG emissions to 2000 levels.
- By 2020, reduce GHG emissions to 1990 levels.
- By 2050, reduce GHG emissions to 80% below 1990 levels.

The 2050 reduction goal represents what some scientists believe is necessary to reach levels that will stabilize the climate. AB 32 as adopted enacts the 2020 GHG reduction goal identified in this Executive Order. However, the Legislature did not include the 2050 GHG reduction goal.



Executive Order S-01-07 – Low Carbon Fuel Standard. Executive Order S-01-07 mandates that a statewide goal shall be established to reduce the carbon intensity of California's transportation fuels by at least 10% by 2020. The CARB adopted the LCFS on April 23, 2009.

In 2018, the CARB approved amendments to the regulation, which included strengthening the carbon intensity benchmarks through 2030 in compliance with the SB 32 GHG emissions reduction target for 2030. The amendments included crediting opportunities to promote zero emission vehicle adoption, alternative jet fuel, carbon capture and sequestration, and advanced technologies to achieve deep decarbonization in the transportation sector (37).

Executive Order S-13-08. Executive Order S-13-08 states that "climate change in California during the next century is expected to shift precipitation patterns, accelerate sea level rise and increase temperatures, thereby posing a serious threat to California's economy, to the health and welfare of its population and to its natural resources." Pursuant to the requirements in the Order, the 2009 California Climate Adaptation Strategy (CNRA 2009) was adopted, which is the "...first statewide, multi-sector, region-specific, and information-based climate change adaptation strategy in the United States." Objectives include analyzing risks of climate change in California, identifying and exploring strategies to adapt to climate change, and specifying a direction for future research.

Executive Order B-30-15. Executive Order B-30-15 sets an interim statewide GHG emission reduction target to reduce GHG emissions to 40% below 1990 levels by 2030 in order to ensure California meets its target of reducing GHG emissions to 80% below 1990 levels by 2050 and directs CARB to update the Climate Change Scoping Plan to express the 2030 target in terms of MMT CO₂e. The Order also requires the state's climate adaptation plan to be updated every three years, and for the State to continue its climate change research program, among other provisions. As with Executive Order S-3-05, this Order is not legally enforceable for local governments and the private sector. However, SB 32 as adopted enacts the 2030 GHG reduction goal identified in this Executive Order but not the 2050 GHG reduction goal.

CALIFORNIA REGULATIONS AND BUILDING CODES

California has a long history of adopting regulations to improve energy efficiency in new and remodeled buildings. These regulations, contained in the California Code of Regulations (CCR), have kept California's energy consumption relatively flat even with rapid population growth.

Title 20 CCR. CCR, Title 20: Division 2, Chapter 4, Article 4, Sections 1601-1608: Appliance Efficiency Regulations regulates the sale of appliances in California. The Appliance Efficiency Regulations include standards for both federally regulated appliances and non-federally regulated appliances. 23 categories of appliances are included in the scope of these regulations. The standards within these regulations apply to appliances that are sold or offered for sale in California, except those sold wholesale in California for final retail sale outside the state and those designed and sold exclusively for use in recreational vehicles or other mobile equipment.

Title 24 CCR. CCR Title 24 Part 6: California's Energy Efficiency Standards for Residential and Nonresidential Buildings, was first adopted in 1978 in response to a legislative mandate to reduce California's energy consumption. The standards are updated periodically to allow consideration and possible incorporation of new energy efficient technologies and methods. Energy efficient



buildings require less electricity; therefore, increased energy efficiency reduces fossil fuel consumption and decreases GHG emissions. The 2019 version of Title 24 was adopted by the CEC and became effective on January 1, 2020.

The 2019 Title 24 standards require solar photovoltaic systems for new homes, establish requirements for newly constructed healthcare facilities, encourage demand responsive technologies for residential buildings, update indoor and outdoor lighting for nonresidential buildings. Single-family homes built with the 2019 standards will use approximately 7% less energy compared to the residential homes built under the 2016 standards. Additionally, after implementation of solar photovoltaic systems, homes built under the 2019 standards will about 53% less energy than homes built under the 2016 standards. Nonresidential buildings will use approximately 30% less energy due to lighting upgrades (38).

CCR, Title 24, Part 11: California Green Building Standards Code (CALGreen) is a comprehensive and uniform regulatory code for all residential, commercial, and school buildings that went in effect on January 1, 2011, and is administered by the California Building Standards Commission. CALGreen is updated on a regular basis along with the rest of Title 24, with the most recent update is the 2019 CALGreen edition. Local jurisdictions are permitted to adopt more stringent requirements, as state law provides methods for local enhancements. CALGreen recognizes that many jurisdictions have developed existing construction and demolition ordinances and defers to them as the ruling guidance provided, they establish a minimum 65% diversion requirement. The code also provides exemptions for areas not served by construction and demolition recycling infrastructure. The State Building Code provides the minimum standard that buildings must meet in order to be certified for occupancy, which is generally enforced by the local building official. 2019 CALGreen standards are applicable to the Project and require (39):

- Short-term bicycle parking. If the new project or an additional alteration is anticipated to generate visitor traffic, provide permanently anchored bicycle racks within 200 feet of the visitors' entrance, readily visible to passers-by, for 5% of new visitor motorized vehicle parking spaces being added, with a minimum of one two-bike capacity rack (5.106.4.1.1).
- Long-term bicycle parking. For new buildings with tenant spaces that have 10 or more tenant-occupants, provide secure bicycle parking for 5% of the tenant-occupant vehicular parking spaces with a minimum of one bicycle parking facility (5.106.4.1.2).
- Designated parking. In new projects or additions to alterations that add 10 or more vehicular
 parking spaces, provide designated parking for any combination of low-emitting, fuel-efficient
 and carpool/van pool vehicles as shown in Table 5.106.5.2 (5.106.5.2).
- Construction waste management. Recycle and/or salvage for reuse a minimum of 65% of the nonhazardous construction and demolition waste in accordance with Section 5.408.1.1.
 5.405.1.2, or 5.408.1.3; or meet a local construction and demolition waste management ordinance, whichever is more stringent (5.408.1).
- Excavated soil and land clearing debris. 100% of trees, stumps, rocks and associated vegetation and soils resulting primarily from land clearing shall be reused or recycled. For a phase project, such material may be stockpiled on site until the storage site is developed (5.408.3).
- Recycling by Occupants. Provide readily accessible areas that serve the entire building and are identified for the depositing, storage and collection of non-hazardous materials for recycling,



- including (at a minimum) paper, corrugated cardboard, glass, plastics, organic waste, and metals or meet a lawfully enacted local recycling ordinance, if more restrictive (5.410.1).
- Water conserving plumbing fixtures and fittings. Plumbing fixtures (water closets and urinals) and fittings (faucets and showerheads) shall comply with the following:
 - Water Closets. The effective flush volume of all water closets shall not exceed 1.28 gallons per flush (5.303.3.1)
 - Urinals. The effective flush volume of wall-mounted urinals shall not exceed 0.125 gallons per flush (5.303.3.2.1). The effective flush volume of floor-mounted or other urinals shall not exceed 0.5 gallons per flush (5.303.3.2.2).
 - Showerheads. Single showerheads shall have a minimum flow rate of not more than 1.8 gallons per minute and 80 psi (5.303.3.3.1). When a shower is served by more than one showerhead, the combine flow rate of all showerheads and/or other shower outlets controlled by a single valve shall not exceed 1.8 gallons per minute at 80 psi (5.303.3.3.2).
 - o Faucets and fountains. Nonresidential lavatory faucets shall have a maximum flow rate of note more than 0.5 gallons per minute at 60 psi (5.303.3.4.1). Kitchen faucets shall have a maximum flow rate of not more than 1.8 gallons per minute of 60 psi (5.303.3.4.2). Wash fountains shall have a maximum flow rate of not more than 1.8 gallons per minute (5.303.3.4.3). Metering faucets shall not deliver more than 0.20 gallons per cycle (5.303.3.4.4). Metering faucets for wash fountains shall have a maximum flow rate not more than 0.20 gallons per cycle (5.303.3.4.5).
- Outdoor portable water use in landscaped areas. Nonresidential developments shall comply
 with a local water efficient landscape ordinance or the current California Department of
 Water Resources' Model Water Efficient Landscape Ordinance (MWELO), whichever is
 more stringent (5.304.1).
- Water meters. Separate submeters or metering devices shall be installed for new buildings or additions in excess of 50,000 sf or for excess consumption where any tenant within a new building or within an addition that is project to consume more than 1,000 gal/day (5.303.1.1 and 5.303.1.2).
- Outdoor water use in rehabilitated landscape projects equal or greater than 2,500 sf. Rehabilitated landscape projects with an aggregate landscape area equal to or greater than 2,500 sf requiring a building or landscape permit (5.304.3).
- Commissioning. For new buildings 10,000 sf and over, building commissioning shall be
 included in the design and construction processes of the building project to verify that the
 building systems and components meet the owner's or owner representative's project
 requirements (5.410.2).

MWELO. The MWELO requirements were updated by AB 1881, the Water Conservation Act. The bill requires local agencies to adopt a local landscape ordinance at least as effective in conserving water as MWELO by January 1, 2010. On April 1, 2015, the Department of Water Resources was ordered by the governor to update MWELO through expedited regulation. The California Water Commission approved the revised MWELO on July 15, 2015, and it became effective December 15, 2015. New development projects that include landscape areas of 500 sf or more are subject to the MWELO. The update requires:



- More efficient irrigation systems;
- Incentives for graywater usage;
- Improvements in on-site stormwater capture;
- Limiting the portion of landscapes that can be planted with high water use plants; and
- Reporting requirements for local agencies.

SB 97 and the CEQA Guidelines Update. SB 97 added Section 21083.05 to the Public Resources Code. The code states "(a) On or before July 1, 2009, the OPR shall prepare, develop, and transmit to the Resources Agency guidelines for the mitigation of GHG emissions or the effects of GHG emissions as required by this division, including, but not limited to, effects associated with transportation or energy consumption. (b) On or before January 1, 2010, the Resources Agency shall certify and adopt guidelines prepared and developed by the OPR pursuant to subdivision (a)." Section 21097 was also added to the Public Resources Code. It provided CEQA protection until January 1, 2010, for transportation projects funded by the Highway Safety, Traffic Reduction, Air Quality, and Port Security Bond Act of 2006 or projects funded by the Disaster Preparedness and Flood Prevention Bond Act of 2006, in stating that the failure to analyze adequately the effects of GHGs would not violate CEQA.

On December 28, 2018, the Natural Resources Agency announced the OAL approved the amendments to the CEQA Guidelines for implementing the CEQA. The CEQA Amendments provide guidance to public agencies regarding the analysis and mitigation of the effects of GHG emissions in CEQA documents. The CEQA Amendments fit within the existing CEQA framework by amending existing CEQA Guidelines to reference climate change.

Section 15064.3 was added the CEQA Guidelines and states that in determining the significance of a project's GHG emissions, the lead agency should focus its analysis on the reasonably foreseeable incremental contribution of the project's emissions to the effects of climate change. A project's incremental contribution may be cumulatively considerable even if it appears relatively small compared to statewide, national, or global emissions. The agency's analysis should consider a timeframe that is appropriate for the project. The agency's analysis also must reasonably reflect evolving scientific knowledge and state regulatory schemes. Additionally, a lead agency may use a model or methodology to estimate GHG emissions resulting from a project. The lead agency has discretion to select the model or methodology it considers most appropriate to enable decision makers to intelligently take into account the project's incremental contribution to climate change. The lead agency must support its selection of a model or methodology with substantial evidence. The lead agency should explain the limitations of the particular model or methodology selected for use (40).

REGIONAL

The Project is within the South Coast Air Basin (SCAB), which is under the jurisdiction of the SCAQMD.



SCAQMD

SCAQMD is the agency responsible for air quality planning and regulation in the SCAB. The SCAQMD addresses the impacts to climate change of projects subject to SCAQMD permit as a lead agency if they are the only agency that has discretionary approval for the project and acts as a responsible agency when a land use agency must also approve discretionary permits for the project. The SCAQMD acts as an expert commenting agency for impacts to air quality. This expertise carries over to GHG emissions, so the agency helps local land use agencies through the development of models and emission thresholds that can be used to address GHG emissions.

In 2008, SCAQMD formed a Working Group to identify GHG emissions thresholds for land use projects that could be used by local lead agencies in the SCAB. The Working Group developed several different options that are contained in the SCAQMD Draft Guidance Document – Interim CEQA GHG Significance Threshold, which could be applied by lead agencies. The working group has not provided additional guidance since release of the interim guidance in 2008 (41). The SCAQMD Board has not approved the thresholds; however, the Guidance Document provides substantial evidence supporting the approaches to significance of GHG emissions that can be considered by the lead agency in adopting its own threshold. The current interim thresholds consist of the following tiered approach:

- Tier 1 consists of evaluating whether or not the project qualifies for any applicable exemption under CEQA.
- Tier 2 consists of determining whether the project is consistent with a GHG reduction plan.
 If a project is consistent with a qualifying local GHG reduction plan, it does not have significant GHG emissions.
- Tier 3 consists of screening values, which the lead agency can choose, but must be
 consistent with all projects within its jurisdiction. A project's construction emissions are
 averaged over 30 years and are added to the project's operational emissions. If a project's
 emissions are below one of the following screening thresholds, then the project is less than
 significant:
 - Residential and Commercial land use: 3,000 MT CO₂e/yr
 - o Industrial land use: 10,000 MT CO₂e/yr
 - Based on land use type: residential: 3,500 MT CO₂e/yr; commercial: 1,400 MT CO₂e/yr; or mixed use: 3,000 MT CO₂e/yr
- Tier 4 has the following options:
 - Option 1: Reduce BAU emissions by a certain percentage; this percentage is currently undefined.
 - Option 2: Early implementation of applicable AB 32 Scoping Plan measures
 - Option 3: 2020 target for service populations (SP), which includes residents and employees: 4.8 MT CO₂e/SP/year for projects and 6.6 MT CO₂e/SP/year for plans;
 - Option 3, 2035 target: 3.0 MT CO₂e/SP/year for projects and 4.1 MT CO₂e/SP/year for plans
- Tier 5 involves mitigation offsets to achieve target significance threshold.



The SCAQMD's interim thresholds used the Executive Order S-3-05-year 2050 goal as the basis for the Tier 3 screening level. Achieving the Executive Order's objective would contribute to worldwide efforts to cap CO₂ concentrations at 450 ppm, thus stabilizing global climate.

SCAQMD only has authority over GHG emissions from development projects that include air quality permits. At this time, it is unknown if the Project would include stationary sources of emissions subject to SCAQMD permits. Notwithstanding, if the Project requires a stationary permit, it would be subject to the applicable SCAQMD regulations.

SCAQMD Regulation XXVII, adopted in 2009 includes the following rules:

- Rule 2700 defines terms and post global warming potentials.
- Rule 2701, SoCal Climate Solutions Exchange, establishes a voluntary program to encourage, quantify, and certify voluntary, high quality certified GHG emission reductions in the SCAQMD.
- Rule 2702, GHG Reduction Program created a program to produce GHG emission reductions within the SCAQMD. The SCAQMD will fund projects through contracts in response to requests for proposals or purchase reductions from other parties.

2.8 DISCUSSION ON ESTABLISHMENT OF SIGNIFICANCE THRESHOLDS

The City of Whittier has not adopted its own numeric threshold of significance for determining impacts with respect to greenhouse gas (GHG) emissions. A screening threshold of 3,000 MT CO₂e per year to determine if additional analysis is required is an acceptable approach for small projects. This approach is a widely accepted screening threshold used by numerous cities in the South Coast Air Basin and is based on the South Coast Air Quality Management District (SCAQMD) staff's proposed GHG screening threshold for stationary source emissions for non-industrial projects, as described in the SCAQMD's *Interim CEQA GHG Significance Threshold for Stationary Sources, Rules and Plans* ("SCAQMD Interim GHG Threshold"). The SCAQMD Interim GHG Threshold identifies a screening threshold to determine whether additional analysis is required (42). As noted by the SCAQMD:

"...the...screening level for stationary sources is based on an emission capture rate of 90 percent for all new or modified projects...the policy objective of [SCAQMD's] recommended interim GHG significance threshold proposal is to achieve an emission capture rate of 90 percent of all new or modified stationary source projects. A GHG significance threshold based on a 90 percent emission capture rate may be more appropriate to address the long-term adverse impacts associated with global climate change because most projects will be required to implement GHG reduction measures. Further, a 90 percent emission capture rate sets the emission threshold low enough to capture a substantial fraction of future stationary source projects that will be constructed to accommodate future statewide population and economic growth, while setting the emission threshold high enough to exclude small projects that will in aggregate contribute a relatively small fraction of the cumulative statewide GHG emissions. This assertion is based on the fact that [SCAQMD] staff estimates that these GHG emissions would account for slightly less than one percent of future 2050 statewide GHG emissions target (85 [MMT CO2e/yr]). In addition, these small projects may be subject to future applicable



GHG control regulations that would further reduce their overall future contribution to the statewide GHG inventory. Finally, these small sources are already subject to [Best Available Control Technology] (BACT) for criteria pollutants and are more likely to be single-permit facilities, so they are more likely to have few opportunities readily available to reduce GHG emissions from other parts of their facility." (42)

Thus, and based on guidance from the SCAQMD, if a non-industrial project would emit GHGs less than 3,000 MT CO_2e per year, the project is not considered a substantial GHG emitter and the GHG impact is less than significant, requiring no additional analysis and no mitigation. On the other hand, if a non-industrial project would emit GHGs in excess of 3,000 MT CO_2e per year, then the project could be considered a substantial GHG emitter, requiring additional analysis and potential mitigation.

As previously discussed, a screening threshold of 3,000 MT CO₂e per year is an acceptable approach for small projects to determine if additional analysis is required and is therefore applied for this Project.



This page intentionally left blank.



3 PROJECT GREENHOUSE GAS IMPACT

3.1 Introduction

The Project has been evaluated to determine if it will result in a significant GHG impact. The significance of these potential impacts is described in the following section.

3.2 STANDARDS OF SIGNIFICANCE

The criteria used to determine the significance of potential Project-related GHG impacts are taken from the Initial Study Checklist in Appendix G of the State CEQA Guidelines (14 California Code of Regulations §§15000, et seq.). Based on these thresholds, a project would result in a significant impact related to GHG if it would (43):

- Generate GHG emissions, either directly or indirectly, that may have a significant impact on the environment?
- Conflict with an applicable plan, policy or regulation adopted for the purpose of reducing the emissions of GHGs?

3.3 CALIFORNIA EMISSIONS ESTIMATOR MODEL™ EMPLOYED TO ANALYZE GHG EMISSIONS

In June, 2021 the SCAQMD in conjunction with the California Air Pollution Control Officers Association (CAPCOA) in coordination with California air districts, released the latest version of the California Emissions Estimator Model (CalEEMod) Version 2020.4.0. The purpose of this model is to calculate construction-source and operational-source criteria pollutant and GHG emissions (CO₂, CH₄, and N₂O) from direct and indirect sources; and quantify applicable air quality and GHG reductions achieved from mitigation (44). Accordingly, the latest version of CalEEMod has been used for this Project to determine construction and operational air quality emissions. CalEEMod output for construction and operational activity are provided in Appendix 3.1.

3.3.1 EMISSION FACTORS MODEL

On August 19, 2019, the EPA approved the 2017 version of the EMissions FACtor model (EMFAC) web database for use in SIP and transportation conformity analyses. EMFAC2017 is a mathematical model that was developed to calculate emission rates, fuel consumption, VMT from motor vehicles that operate on highways, freeways, and local roads in California and is commonly used by the CARB to project changes in future emissions from on-road mobile sources (45). The EMFAC emission factors used in this analysis include adjustment factors for the SAFE Rule and thus represent a conservative scenario (46) (47).

3.4 LIFE-CYCLE ANALYSIS NOT REQUIRED

A full life-cycle analysis (LCA) for construction and operational activity is not included in this analysis due to the lack of consensus guidance on LCA methodology at this time (48). Life-cycle analysis (i.e., assessing economy-wide GHG emissions from the processes in manufacturing and transporting all raw materials used in the project development, infrastructure, and on-going



operations) depends on emission factors or econometric factors that are not well established for all processes. At this time, an LCA would be extremely speculative and thus has not been prepared.

Additionally, the SCAQMD recommends analyzing direct and indirect project GHG emissions generated within California and not life-cycle emissions because the life-cycle effects from a project could occur outside of California, might not be very well understood or documented, and would be challenging to mitigate (49). Additionally, the science to calculate life cycle emissions is not yet established or well defined; therefore, SCAQMD has not recommended, and is not requiring, life-cycle emissions analysis.

3.5 CONSTRUCTION EMISSIONS

Project construction activities would generate CO₂ and CH₄ emissions The report Whittier Residential Air Quality Impact Analysis Report contains detailed information regarding Project construction activities (50). Construction related emissions are expected from the following activities:

- Demolition
- Site Preparation
- Grading
- Building Construction
- Paving
- Architectural Coating

3.5.1 CONSTRUCTION DURATION

Construction is expected to commence in November 2022 and will continue through April 2023. The construction schedule utilized in the analysis, shown in Table 3-1, represents a "worst-case" analysis scenario should construction occur any time after the respective dates since emission factors for construction decrease as time passes and the analysis year increases due to emission regulations becoming more stringent.² The duration of construction activity and associated equipment represents a reasonable approximation of the expected construction fleet as required per CEQA Guidelines. The duration of construction activities was based on CalEEMod defaults and an opening year of 2023.

² As shown in the CalEEMod User's Guide Version 2020.4.0, Section 4.3 "Offroad Equipment" as the analysis year increases, emission factors for the same equipment pieces decrease due to the natural turnover of older equipment being replaced by newer less polluting equipment and new regulatory requirements.



14480-03_GHG_Report

TABLE 3-1: CONSTRUCTION DURATION

Phase Name	Start Date	End Date	Days
Demolition	11/1/2022	11/14/2022	10
Site Preparation	11/15/2022	11/15/2022	1
Grading	11/16/2022	11/17/2022	2
Building Construction	11/18/2022	4/6/2023	100
Paving	3/31/2023	4/6/2023	5
Architectural Coating	3/31/2023	4/6/2023	5

Source: CalEEMod, Appendix 3.1.

3.5.2 CONSTRUCTION EQUIPMENT

Site specific construction fleet may vary due to specific Project needs at the time of construction. The construction equipment estimates are generally based on CalEEMod standard inputs. A modification to the default equipment list was made to allow the model to mor accurately calculate fugitive dust from ground disturbance for purposes of the air quality localized significance threshold. As CalEEmod does not calculate ground disturbance for the Tractors/Loaders/Backhoes equipment, these were replaced with crawler tractors with the same horse power and load factors of the Tractors/Loaders/Backhoes equipment. A detailed summary of construction equipment assumptions by phase is provided at Table 3-2. Please refer to specific detailed modeling inputs/outputs contained in Appendix 3.1.

3.5.3 Construction Emissions Summary

To evaluate Project construction emissions, GHG emissions are quantified and amortized over the life of the Project and added to the operations emissions. To amortize the emissions over the life of the Project, the SCAQMD recommends calculating the total GHG emissions for the construction activities, dividing it by a 30-year project life then adding that number to the annual operational GHG emissions (51). Therefore, Project construction emissions have been amortized over a 30-year period and added to the annual operational GHG emissions. The amortized construction emissions are presented in Table 3-3.

3.6 OPERATIONAL EMISSIONS

Operational activities associated with the proposed Project will result in emissions of CO₂, CH₄, and N₂O from the following primary sources:

- Area Source Emissions
- Energy Source Emissions
- Mobile Source Emissions
- Water Supply, Treatment, and Distribution
- Solid Waste



TABLE 3-2: CONSTRUCTION EQUIPMENT ASSUMPTIONS

Phase Name	Equipment	Amount	Hours Per Day
	Concrete/Industrial Saws	1	8
Demolition	Rubber Tired Dozers	1	8
	Tractors/Loaders/Backhoes	2	8
Cita Dranaration	Crawler Tractors (T/L/B)	1	8
Site Preparation	Graders	1	8
	Crawler Tractors (T/L/B)	1	8
Grading	Graders	1	8
	Rubber Tired Dozers	1	8
	Cranes	1	8
Building Construction	Forklifts	2	8
	Tractors/Loaders/Backhoes	2	8
	Cement and Mortar Mixers	4	8
Paving	Pavers	1	8
	Rollers	1	8
	Tractors/Loaders/Backhoes	1	8
Architectural Coating	Air Compressors	1	8

T/L/B = Tractors, Loaders, Backhoes; E = Excavators

Source: CalEEMod, Appendix 3.1

TABLE 3-3 AMORTIZED ANNUAL CONSTRUCTION EMISSIONS

Vacu	Emissions (MT/yr)			
Year	CO ₂	CH₄	N ₂ O	Total CO₂e
2022	42.08	0.01	0.00	42.58
2023	64.56	0.02	0.00	65.21
Total Annual Construction Emissions	106.64	0.03	0.00	107.79
Amortized Construction Emissions (MTCO₂e)	3.55	0.00	0.00	3.59

Source: CalEEMod, Appendix 3.1

3.6.1 AREA SOURCE EMISSIONS

Landscape maintenance equipment are typically the only area sources that would generate emissions GHG emissions, which are primarily due to fuel combustion and evaporation of unburned fuel. Equipment in this category would include lawnmowers, shredders/grinders, blowers, trimmers, chain saws, and hedge trimmers used to maintain the landscaping of the Project. The emissions associated with landscape maintenance equipment were calculated based on standard assumptions included in CalEEMod.



3.6.2 ENERGY SOURCE EMISSIONS

COMBUSTION EMISSIONS ASSOCIATED WITH NATURAL GAS AND ELECTRICITY

GHGs are emitted from buildings as a result of activities for which electricity and natural gas are typically used as energy sources. Combustion of any type of fuel emits CO₂ and other GHGs directly into the atmosphere; these emissions are considered direct emissions associated with a building; the building energy use emissions do not include street lighting³. GHGs are also emitted during the generation of electricity from fossil fuels; these emissions are indirect emissions. Unless otherwise noted, CalEEMod default parameters were used.

RENEWABLE PORTFOLIO STANDARD

Indirect emissions from electricity use were modeled based on electricity intensity factors for the Project utility provider, Southern California Edison (SCE). CalEEMOD derives energy intensity factors from 2019 data, which indicates that in 2019 SCE generated 393 pounds of CO₂e for each megawatt-hour (MWh) of electricity delivered. SCE had a power mix with 38% renewables in 2019 and is projected to meet the 44% renewables requirement by 2024 (52). The 2019 reported energy intensity factors were used in this analysis of GHG emissions.

TITLE 24 ENERGY EFFICIENCY STANDARDS

California's Energy Efficiency Standards for Residential and Nonresidential Buildings was first adopted in 1978 in response to a legislative mandate to reduce California's energy consumption. The standards are updated periodically to allow consideration and possible incorporation of new energy efficient technologies and methods. Energy efficient buildings require less electricity. The 2019 version of Title 24 was adopted by the CEC and became effective on January 1, 2020 (5). The 2019 Energy Code is used in this analysis.

3.6.3 MOBILE SOURCE EMISSIONS

Project mobile source GHG impacts are dependent on both overall daily vehicle trip generation and the effect of the Project on peak hour traffic volumes and traffic operations in the vicinity of the Project. The Project-related GHG impacts are derived primarily from vehicle trips generated by the Project. Trip characteristics available from the TIA report were utilized in this analysis (53).

3.6.4 WATER SUPPLY, TREATMENT AND DISTRIBUTION

Indirect GHG emissions result from the production of electricity used to convey, treat, and distribute water and wastewater. The amount of electricity required to convey, treat and distribute water depends on the volume of water as well as the sources of the water. CalEEMod default end use water demand rates are based on 2000 water demand data. Since 2013 CalGreen has required a 20% reduction in indoor water use over base line rates (54). This was implemented through design requirements in the code for water closets, faucets and other plumbing fixtures

³ The CalEEMod emissions inventory model does not include indirect emission related to street lighting. Indirect emissions related to street lighting are expected to be negligible and cannot be accurately quantified at this time as there is insufficient information as to the number and type of street lighting that would occur.



14480-03_GHG_Report

to achieve the 20% decrease by decreasing the flow rates by 20%. Therefore, CalEEMod default parameters were modified to reflect this post 2000 requirement.

3.6.5 SOLID WASTE

Residential land uses will result in the generation and disposal of solid waste. A large percentage of this waste will be diverted from landfills by a variety of means, such as reducing the amount of waste generated, recycling, and/or composting. The remainder of the waste not diverted will be disposed of at a landfill. GHG emissions from landfills are associated with the anaerobic breakdown of material. GHG emissions associated with the disposal of solid waste associated with the proposed Project were calculated by CalEEMod using standard generation rates.

3.7 EMISSIONS SUMMARY

The annual GHG emissions associated with the operation of the proposed Project without mitigation are estimated to be approximately 377.42CO₂e/yr as summarized in Table 3-4.

TABLE 3-4: PROJECT GHG EMISSIONS

Emission Source		Emissions (MT/yr)			
Emission Source	CO ₂	CH₄	N ₂ O	Total CO₂e	
Annual construction-related emissions amortized over 30 years	3.55	0.00	0.00	3.59	
Area Source	12.11	0.00	0.00	12.20	
Energy Source	71.76	0.00	0.00	72.16	
Mobile Source	259.40	0.02	0.01	263.23	
Waste	4.86	0.29	0.00	12.03	
Water Usage	11.33	0.09	0.00	14.21	
Total CO₂e (All Sources)	All Sources) 377.42				
SCAQMD Threshold	3,000				
Significant?	No				

Source: CalEEMod, Appendix 3.1

3.8 Greenhouse Gas Emissions Findings and Recommendations

3.8.1 **GHG IMPACT 1**

The Project could generate direct or indirect GHG emissions that would result in a significant impact on the environment.

IMPACTS WITHOUT PROJECT DESIGN FEATURES AND MITIGATION

The annual GHG emissions associated with the operation of the proposed Project are estimated to be 377.42MT CO₂e per year as summarized in Table 3-4. Direct and indirect operational emissions associated with the Project are compared with the SCAQMD threshold of significance for small land use projects, which is 3,000 MT CO₂e per year (55). As shown, the proposed Project would result in a less than significant impact with respect to GHG emissions.



^{-- =} Emission factor only provided in MT CO₂e

3.8.2 **GHG IMPACT 2**

The Project could not conflict with any applicable plan, policy or regulation of an agency adopted for the purpose of reducing the emissions of GHGs.

As previously stated, pursuant to 15604.4 of the *CEQA Guidelines*, a lead agency may rely on qualitative analysis or performance-based standards to determine the significance of impacts from GHG emissions (43). As such, the Project's consistency with SB 32 (2017 Scoping Plan), is discussed below. Consistency with AB 32 and the 2008 Scoping Plan is not necessary, since the target year for AB 32 and the 2008 Scoping Plan was 2020, and the Project's buildout year for modeling is 2023. As such the 2017 Scoping Plan is the most relevant statewide plan. Project consistency with SB 32 is evaluated in the following discussion.

SB 32/2017 Scoping Plan Consistency

The 2017 Scoping Plan Update reflects the 2030 target of a 40% reduction below 1990 levels, set by Executive Order B-30-15 and codified by SB 32. Table 3-5 summarizes the Project's consistency with the 2017 Scoping Plan. As summarized, the Project will not conflict with any of the provisions of the Scoping Plan and in fact supports seven of the action categories.

TABLE 3-5: 2017 SCOPING PLAN CONSISTENCY SUMMARY

Action	Responsible Parties	Consistency
Implement SB 350 by 2030		
Increase the Renewables Portfolio Standard to 50% of retail sales by 2030 and ensure grid reliability.	CPUC, CEC, CARB	Consistent. This measure is not directly applicable to development projects, but the proposed Project would use energy from Southern California Edison, which has committed to diversify its portfolio of energy sources by increasing energy from wind and solar sources. Additionally, as the project buildings are less than 4-stories, they would be required to install solar PV systems to increase renewable energy availability for the Project.
Establish annual targets for statewide energy efficiency savings and demand reduction that will achieve a cumulative doubling of statewide energy efficiency savings in electricity and natural gas end uses by 2030.		Consistent. Although this measure is directed towards policymakers, the proposed Project would be designed consistent with Title 24 2019, which increases in overall energy efficiency from Title 24 2016.



TABLE 3-5: 2017 SCOPING PLAN CONSISTENCY SUMMARY

Action	Responsible Parties	Consistency
Reduce GHG emissions in the electricity sector through the implementation of the above measures and other actions as modeled in Integrated Resource Planning (IRP) to meet GHG emissions reductions planning targets in the IRP process. Loadserving entities and publicly-owned utilities meet GHG emissions reductions planning targets through a combination of measures as described in IRPs.		Not applicable. This measure is not within the purview of this Project.
Implement Mobile Source Strategy (Cleaner T	echnology and Fuels)	
At least 1.5 million zero emission and plugin hybrid light-duty electric vehicles by 2025.		No conflict. These are CARB enforced standards; vehicles that access the Project that are required to comply with the standards will comply with the strategy.
At least 4.2 million zero emission and plugin hybrid light-duty electric vehicles by 2030.	CARB, California State Transportation Agency (CalSTA), Strategic Growth Council (SGC), California	No conflict. These are CARB enforced standards; vehicles that access the Project that are required to comply with the standards will comply with the strategy.
Further increase GHG stringency on all light-duty vehicles beyond existing Advanced Clean cars regulations.		No conflict. These are CARB enforced standards; vehicles that access the Project that are required to comply with the standards will comply with the strategy.
Medium- and Heavy-Duty GHG Phase 2.	Department of Transportation (Caltrans), CEC,	No conflict. These are CARB enforced standards; vehicles that access the Project that are required to comply with the standards will comply with the strategy.
Innovative Clean Transit: Transition to a suite of to-be-determined innovative clean transit options. Assumed 20% of new urban buses purchased beginning in 2018 will be zero emission buses with the penetration of zero-emission technology ramped up to 100% of new sales in 2030. Also, new natural gas buses, starting in 2018, and diesel buses, starting in 2020, meet the optional heavy-duty low-NO _x standard.	OPR, Local Agencies	Not applicable. This measure is not within the purview of this Project.



TABLE 3-5: 2017 SCOPING PLAN CONSISTENCY SUMMARY

Action	Responsible Parties	Consistency
Last Mile Delivery: New regulation that would result in the use of low NO _X or cleaner engines and the deployment of increasing numbers of zero-emission trucks primarily for class 3-7 last mile delivery trucks in California. This measure assumes ZEVs comprise 2.5% of new Class 3–7 truck sales in local fleets starting in 2020, increasing to 10% in 2025 and remaining flat through 2030.		Not applicable. This Project is not responsible for implementation of SB 375 and would therefore not conflict with this measure.
Further reduce VMT through continued implementation of SB 375 and regional Sustainable Communities Strategies; forthcoming statewide implementation of SB 743; and potential additional VMT reduction strategies not specified in the Mobile Source Strategy but included in the document "Potential VMT Reduction Strategies for Discussion."		No conflict. This Project is not responsible for implementation of SB 375 and would therefore not conflict with this measure. However, the project does result in net negative tip generation in the City of Whittier as the Project would generate fewer trips than the previous land use.
Increase stringency of SB 375 Sustainable Communities Strategy (2035 targets).	CARB	Not applicable. The Project is not within the purview of SB 375 and would therefore not conflict with this measure.
By 2019, adjust performance measures used	to select and design tra	nsportation facilities
Harmonize project performance with emissions reductions and increase competitiveness of transit and active transportation modes (e.g., via guideline documents, funding programs, project selection, etc.).	CalSTA, SGC, OPR, CARB, Governor's Office of Business and Economic Development (GO-Biz), California Infrastructure and Economic Development Bank, Department of Finance, California Transportation Commission (CTC), Caltrans	Not applicable. Although this is directed towards CARB and Caltrans, the proposed Project would be designed to promote and support pedestrian activity on-site and in the Project Site area.



TABLE 3-5: 2017 SCOPING PLAN CONSISTENCY SUMMARY

Action	Responsible Parties	Consistency
By 2019, develop pricing policies to support low-GHG transportation (e.g., low-emission vehicle zones for heavy duty, road user, parking pricing, transit discounts).	CalSTA, Caltrans, CTC, OPR, SGC, CARB	Not applicable. Although this measure is directed towards policymakers, the proposed Project would comply with AB 939, which sets a statewide policy that not less than 65% of solid waste generated be source reduced, recycled, or composted. Additionally, the proposed Project would be required to participate in the City of Whittier recycling program and recycling collection. During construction, the proposed Project shall recycle and reuse construction and demolition waste per City of Whittier solid waste procedures.
Implement California Sustainable Freight Acti	ion Plan	
Improve freight system efficiency.	CalSTA, CalEPA, CNRA,	Not applicable. This measure is not within the purview of this Project.
Deploy over 100,000 freight vehicles and equipment capable of zero emission operation and maximize both zero and near-zero emission freight vehicles and equipment powered by renewable energy by 2030.	CARB, Caltrans, CEC, GO-Biz	Not applicable. This measure is not within the purview of this Project.
Adopt a Low Carbon Fuel Standard with a Carbon Intensity reduction of 18%.	CARB	No conflict. This measure would apply to all fuel purchased and used by the Project in the state.
Implement the Short-Lived Climate Pollutant	Strategy by 2030	
40% reduction in methane and hydrofluorocarbon emissions below 2013 levels.	CARB, CalRecycle,	Not applicable. This measure is not within the purview of this Project.
50% reduction in black carbon emissions below 2013 levels.	CDFA, SWRCB, Local Air Districts	Not applicable. This measure is not within the purview of this Project.
By 2019, develop regulations and programs to support organic waste landfill reduction goals in the SLCP and SB 1383.	CARB, CalRecycle, CDFA SWRCB, Local Air Districts	Not applicable. This measure is not within the purview of this Project.



TABLE 3-5: 2017 SCOPING PLAN CONSISTENCY SUMMARY

Action	Responsible Parties	Consistency
Implement the post-2020 Cap-and-Trade Program with declining annual caps.	CARB	Not applicable. This measure is not within the purview of this Project.
By 2018, develop Integrated Natural and Wo a net carbon sink	rking Lands Implementa	ation Plan to secure California's land base as
Protect land from conversion through conservation easements and other incentives.		Not applicable. This measure is not within the purview of this Project.
Increase the long-term resilience of carbon storage in the land base and enhance sequestration capacity	CNRA, Departments Within	Not applicable. This measure is not within the purview of this Project.
Utilize wood and agricultural products to increase the amount of carbon stored in the natural and built environments	C-IEDA	Not applicable. This measure is not within the purview of this Project.
Establish scenario projections to serve as the foundation for the Implementation Plan		Not applicable. This measure is not within the purview of this Project.
Establish a carbon accounting framework for natural and working lands as described in SB 859 by 2018	CARB	Not applicable. This measure is not within the purview of this Project.
Implement Forest Carbon Plan	CNRA, California Department of Forestry and Fire Protection, CalEPA and Departments Within	Not applicable. This measure is not within the purview of this Project.
Identify and expand funding and financing mechanisms to support GHG reductions across all sectors.	State Agencies & Local Agencies	Not applicable. This measure is not within the purview of this Project.

As shown above, the Project would not conflict with any of the 2017 Scoping Plan elements as any regulations adopted would apply directly or indirectly to the Project. Further, recent studies show that the State's existing and proposed regulatory framework will allow the State to reduce its GHG emissions level to 40% below 1990 levels by 2030 (33).

SUMMARY

As shown, the Project does not directly conflict with any applicable plans or policies adopted for the purpose of reducing GHG emissions. Additionally, the project would not exceed the City of Whittier threshold of 3,000 MT CO₂e. Therefore, Project-related emissions would be less than significant relative to GHG reduction plans.



This page intentionally left blank.



4 REFERENCES

- 1. **State of California.** *2019 CEQA California Environmental Quality Act.* 2019.
- 2. **Air Resources Board.** Assembly Bill 32: Global Warming Solutions Act. [Online] 2006. http://www.arb.ca.gov/cc/ab32/ab32.htm.
- 3. —. Sustainable Communities. [Online] 2008. http://www.arb.ca.gov/cc/sb375/sb375.htm.
- 4. —. Clean Car Standards Pavley, Assembly Bill 1493. [Online] September 24, 2009. http://www.arb.ca.gov/cc/ccms/ccms.htm.
- 5. **Building Standards Commission.** California Building Standards Code (Title 24, California Code of Regulations). [Online] http://www.bsc.ca.gov/codes.aspx.
- 6. **California Energy Commission.** California Code of Regulations, TITLE 20, Division 2. [Online] September 3, 2013. http://www.energy.ca.gov/reports/title20/index.html.
- 7. **Air Resources Board.** Title 17 California Code of Regulation. [Online] 2010. http://www.arb.ca.gov/regs/regs-17.htm.
- 8. **Department of Water Resources.** Updated Model Water Efficient Landscape Ordinance AB 1881. [Online] 2006. [Cited: November 13, 2013.] http://www.water.ca.gov/wateruseefficiency/landscapeordinance/updatedOrd_history.cfm.
- 9. **California Energy Commission.** SB 1368 Emission Performance Standards. [Online] September 29, 2006. http://www.energy.ca.gov/emission_standards/.
- 10. —. Renewables Portfolio Standard (RPS). [Online] 2002. http://www.energy.ca.gov/portfolio/.
- 11. **California Legislative Information.** Senate Bill No. 32. [Online] September 8, 2016. https://leginfo.legislature.ca.gov/faces/billNavClient.xhtml?bill_id=201520160SB32.
- 12. **National Oceanic and Atmospheric Administration.** Greenhouse Gases Water Vapor. *NOAA National Centers For Environmental Information.* [Online] https://www.ncdc.noaa.gov/monitoring-references/faq/greenhouse-gases.php?section=watervapor.
- 13. Climate Change 2007: The Physical Science Basis. Contribution of Working Group I to the Fourth Assessment Report. International Panel on Climate Change. 4, 2007.
- 14. The Carbon Cycle and Climate Change. **Bennington, Bret J.** 1, s.l.: Brooks/Cole. ISBN 1 3: 978-0-495-73855-8.
- 15. **The National Institute for Occupational Safety and Health.** Carbon Dioxide. *Centers for Disease Control and Prevention.* [Online] https://www.cdc.gov/niosh/npg/npgd0103.html.
- 16. **National Oceanic and Atmospheric Administration.** Greenhouse Gases Methane. *NOAA National Centers for Environmental Information.* [Online] https://www.ncdc.noaa.gov/monitoring-references/faq/greenhouse-gases.php?section=methane.
- 17. World Resources Institute. Climate Analysis Indicator Tool (CAIT). [Online] http://cait.wri.org.
- 18. **National Oceanic and Atmospheric Administration.** Greenhouse Gases Chlorofluorocarbons. *NOAA National Centers For Environmental Information.* [Online] https://www.ncdc.noaa.gov/monitoring-references/faq/greenhouse-gases.php?section=chlorofluorocarbons.
- 19. **United States Environmental Protection Agency.** Regulation for Reducting Sulfur Hexafluoride Emissions from Gas Insulated Switchgear. *Environmental Protection Agency.* [Online] May 7, 2014. https://www.epa.gov/sites/production/files/2016-02/documents/mehl-arb-presentation-2014-wkshp.pdf.



- 20. **World Resources Institute.** Nitrogen Trifluoride Now Required in GHG Protocol Greenhouse Gas Emissions Inventory. [Online] May 22, 2013. https://www.wri.org/blog/2013/05/nitrogen-trifluoride-now-required-ghg-protocol-greenhouse-gas-emissions-inventories.
- 21. **National Center for Biotechnology Information.** Nitrogen Trifluoride. *PubChem Compound Database.* [Online] https://pubchem.ncbi.nlm.nih.gov/compound/24553.
- 22. **American Lung Association.** Climate Change. [Online] http://www.lung.org/our-initiatives/healthy-air/outdoor/climate-change/.
- 23. **Barbara H. Allen-Diaz.** Climate change affects us all. *University of California Agriculture and Natural Resources*. [Online] April 1, 2009. http://calag.ucanr.edu/Archive/?article=ca.v063n02p51.
- 24. Intergovernmental Panel on Climate Change. Climate Change 2013 The Physical Science Basis Working Group I Contribution to the Fifth Assessment Report of the Intergovernmental Panel on Climate Change. AR5 Climate Change 2013: The Physical Science Basis. [Online] September 2013. https://www.ipcc.ch/site/assets/uploads/2018/02/WG1AR5_all_final.pdf.
- 25. World Resources Institute. Climate Analysis Indicator Tool (CAIT). [Online] http://cait.wri.org.
- 26. **Air Resources Board.** 2020 GHG Inventory. *California Greenhouse Gas Emission Inventory 2000-2018 Edition.* [Online] [Cited: May 20, 2021.] https://ww3.arb.ca.gov/cc/inventory/pubs/reports/2000_2018/ghg_inventory_trends_00-18.pdf.
- 27. **Agency, United States Environmental Protection.** Endangerment and Cause or Contribute Findings for Greenhouse Gases under the Section 202(a) of the Clean Air Act. *United States Environmental Protection Agency.* [Online] https://www.epa.gov/ghgemissions/endangerment-and-cause-or-contribute-findings-greenhouse-gases-under-section-202a-clean.
- 28. **Federal Register.** Mid-Term Evaluation of Greenhouse Gas Emissions Standards for Model Year 2022-2025 Light-Duty Vehicles. [Online] 2018. https://www.federalregister.gov/documents/2018/04/13/2018-07364/mid-term-evaluation-of-greenhouse-gas-emissions-standards-for-model-year-2022-2025-light-duty.
- 29. **Administration, National Highway Traffic Safety.** SAFE: The Safer Affordable Fuel-Efficient 'SAFE' Vehicle Rule. *National Highway Traffic Safety Administration*. [Online] 2020. https://www.nhtsa.gov/corporate-average-fuel-economy/safe.
- 30. **U.S. Environmental Protection Agency.** *EPA Reconsiders Previous Administration's Withdrawal of California's Waiver to Enforce Greenhouse Gas Standards for Cars and Light Trucks.* Washinbgton D.C.: s.n., April 26, 2021.
- 31. **United States Environmental Protection Agency.** SmartWay. [Online] https://www.epa.gov/smartway/learn-about-smartway.
- 32. **California Air Resources Board.** California's 2017 Climate Change Scoping Plan . [Online] 2017. https://ww3.arb.ca.gov/cc/scopingplan/scoping plan 2017 es.pdf.
- 33. Lawrence Berkeley National Laboratory. California's Policies Can Significantly Cut Greenhouse Gas Emissions through 2030. *Lawrence Berkeley National Laboratory*. [Online] January 22, 2015. http://newscenter.lbl.gov/2015/01/22/californias-policies-can-significantly-cut-greenhouse-gas-emissions-2030/.
- 34. **Ernest Orlando Lawrence Berkeley National Laboratory.** Modeling California policy impacts on greenhouse gas emissions. [Online] 2015. https://eaei.lbl.gov/sites/all/files/lbnl-7008e.pdf.
- 35. **California Air Resources Board.** Legal Disclaimer & User's Notice. [Online] April 2019. https://ww3.arb.ca.gov/cc/capandtrade/capandtrade/ct_reg_unofficial.pdf.



- 36. —. Climate Change Scoping Plan. [Online] 2014. https://ww3.arb.ca.gov/cc/scopingplan/2013_update/first_update_climate_change_scoping_plan.p df.
- 37. Low Carbon Fuel Standard. [Online] December 2019. https://ww3.arb.ca.gov/fuels/lcfs/lcfs.htm.
- 38. **The California Energy Commission.** 2019 Building Energy Efficiency Standards . *California Energy Commission*. [Online] 2018. https://www.energy.ca.gov/title24/2019standards/documents/2018_Title_24_2019_Building_Standards_FAQ.pdf.
- 39. **Department of General Services.** Building Standards Commission. *CALGreen.* [Online] https://www.dgs.ca.gov/BSC/Resources/Page-Content/Building-Standards-Commission-Resources-List-Folder/CALGreen.
- 40. Association of Environmental Professionals. 2018 CEQA California Environmental Quality Act. 2018.
- 41. **South Coast Air Quality Management District.** Interim CEQA GHG Significance Threshold for Stationary Sources, Rules and Plans. [Online] http://www.aqmd.gov/hb/2008/December/081231a.htm.
- 42. —. Interim CEQA GHG Significance Threshold for Stationary Sources, Rules and Plans. [Online] http://www.aqmd.gov/hb/2008/December/081231a.htm.
- 43. **State of California.** 2019 CEQA California Environmental Quality Act. 2019.
- 44. **California Air Pollution Control Officers Association (CAPCOA).** California Emissions Estimator Model (CalEEMod). [Online] June 2021. www.caleemod.com.
- 45. **California Department of Transportation.** 2017 EMFAC Software. [Online] http://www.dot.ca.gov/hq/env/air/pages/emfac.htm.
- 46. **California Air Resources Board.** *EMFAC Off-Model Adjustment Factors to Account for the SAFE Vehicle Rule Part One.* 2019.
- 47. —. EMFAC Off-Model Adjustment Factors for Carbon Dioxide (CO2) Emissions to Account for the SAFE Vehicles Rule Part One and the Final SAFE Rule. 2020.
- 48. **California Natural Resources Agency.** Final Statement of Reasons for Regulatory Action, Amendments to the State CEQA Guidelines Addressing Analysis and Mitigation of Greenhouse Gas Emissions Pursuant to SB97. [Online] December 2009.
- 49. Minutes for the GHG CEQA Significance. South Coast Air Quality Managment District. 2008.
- 50. Urban Crossroads, Inc. Whittier Residential Air Quality Impact Analysis Report. 2021.
- 51. **South Coast Air Quality Management District.** *Greenhouse Gas CEQA Significance Threshold Stakeholder Working Group #13.* [Powerpoint] Diamond Bar: s.n., 2009.
- 52. California Public Utilities Comission. Annual Report to the Legistaure. 2020.
- 53. **Urban Crossroads, Inc.** *Whittier Residential Traffic Impact Analysis.* 2021.
- 54. **California Energy Comission.** *California Bulding Code, Part 11 CalGreen Residential Mandatory Measures, Section 4.303.1.* 2013.
- 55. **South Coast Air Quality Management District.** Interim CEQA GHG Significance Threshold for Stationary Sources, Rules and Plans. [Online] http://www.aqmd.gov/docs/default-source/ceqa/handbook/greenhouse-gases-(ghg)-ceqa-significance-thresholds/year-2008-2009/ghg-meeting-8/ghg-meeting-8-minutes.pdf?sfvrsn=2.



5 CERTIFICATIONS

The contents of this GHG study report represent an accurate depiction of the GHG Impacts associated with the proposed Whittier Residential. The information contained in this GHG report is based on the best available data at the time of preparation. If you have any questions, please contact me directly at hqureshi@urbanxroads.com

Haseeb Qureshi
Associate Principal
URBAN CROSSROADS, INC.
hqureshi@urbanxroads.com

EDUCATION

Master of Science in Environmental Studies California State University, Fullerton • May 2010

Bachelor of Arts in Environmental Analysis and Design University of California, Irvine • June, 2006

PROFESSIONAL AFFILIATIONS

AEP – Association of Environmental Planners AWMA – Air and Waste Management Association ASTM – American Society for Testing and Materials

PROFESSIONAL CERTIFICATIONS

Planned Communities and Urban Infill – Urban Land Institute • June 2011 Indoor Air Quality and Industrial Hygiene – EMSL Analytical • April 2008 Principles of Ambient Air Monitoring – CARB • August 2007 AB2588 Regulatory Standards – Trinity Consultants • November 2006 Air Dispersion Modeling – Lakes Environmental • June 2006



This page intentionally left blank.



APPENDIX 3.1: CALEEMOD EMISSIONS MODEL OUTPUTS



CalEEMod Version: CalEEMod.2020.4.0 Page 1 of 32 Date: 12/20/2021 3:14 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

14480 Whittier Resdiential

South Coast AQMD Air District, Annual

1.0 Project Characteristics

1.1 Land Usage

Land Uses	Size	Metric	Lot Acreage	Floor Surface Area	Population
Apartments Mid Rise	52.00	Dwelling Unit	0.82	52,000.00	149

1.2 Other Project Characteristics

UrbanizationUrbanWind Speed (m/s)2.2Precipitation Freq (Days)31

Climate Zone 9 Operational Year 2023

Utility Company Southern California Edison

 CO2 Intensity
 390.98
 CH4 Intensity
 0.033
 N20 Intensity
 0.004

 (lb/MWhr)
 (lb/MWhr)
 (lb/MWhr)
 (lb/MWhr)

1.3 User Entered Comments & Non-Default Data

Project Characteristics -

Land Use - Taken from Project Description

Construction Phase -

Off-road Equipment - Standard 8-hour work day

Off-road Equipment - Standard 8-hour work day

Off-road Equipment - Standard 8-hour work day

Off-road Equipment - T/L/B replaced with Crawler Tractor to accuretly calculate distrubance

Standard 8-hour work day

Off-road Equipment - Standard 8-hour work day

Off-road Equipment - T/L/B replaced with Crawler Tractor to accuretly calculate distrubance

Trips and VMT -

Demolition - Medical Office Building is 7,172 sf

14480 Whittier Resdiential - South Coast AQMD Air District, Annual

Date: 12/20/2021 3:14 PM

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Grading - 689 CY of Cut and 1219 CY of Fill with a Total import of 530 CY

Vehicle Trips - Total trips from TIA report is 236

Vehicle Emission Factors - ex

Vehicle Emission Factors -

Vehicle Emission Factors -

Woodstoves - Per SCAQMD Rule 445 no wood burning devices

Water And Wastewater - Per CalGreen title 24 2013 20% reduction over year 2000 data

Construction Off-road Equipment Mitigation - Per SCAQMD Rule 403 Water 3 x a day, install tractout devices or sweep streets daily. Rule 403 Implementaion handbook = 46% for tractout devices.

Table Name	Column Name	Default Value	New Value
tblFireplaces	NumberGas	44.20	46.80
tblFireplaces	NumberWood	2.60	0.00
tblGrading	MaterialImported	0.00	530.00
tblLandUse	LotAcreage	1.37	0.82
tblOffRoadEquipment	HorsePower	212.00	97.00
tblOffRoadEquipment	HorsePower	212.00	97.00
tblOffRoadEquipment	LoadFactor	0.43	0.37
tblOffRoadEquipment	LoadFactor	0.43	0.37
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	4.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	7.00	8.00
tblOffRoadEquipment	UsageHours	7.00	8.00
tblOffRoadEquipment	UsageHours	1.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	7.00	8.00

14480 Whittier Resdiential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

tblVehicleTrips	ST_TR	4.91	4.10
tblVehicleTrips	SU_TR	4.09	3.41
tblVehicleTrips	WD_TR	5.44	4.54
tblWater	IndoorWaterUseRate	3,388,009.33	2,710,407.46
tblWoodstoves	NumberCatalytic	2.60	0.00
tblWoodstoves	NumberNoncatalytic	2.60	0.00
tblWoodstoves	WoodstoveDayYear	25.00	0.00
tblWoodstoves	WoodstoveWoodMass	999.60	0.00

2.0 Emissions Summary

CalEEMod Version: CalEEMod.2020.4.0 Page 4 of 32 Date: 12/20/2021 3:14 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.1 Overall Construction

Unmitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year					ton	s/yr							MT	/yr		
2022	0.0266	0.2602	0.2288	4.7000e- 004	0.0201	0.0126	0.0327	6.3300e- 003	0.0117	0.0180	0.0000	42.0756	42.0756	9.9000e- 003	8.8000e- 004	42.5845
2023	0.1992	0.3355	0.3696	7.3000e- 004	0.0160	0.0160	0.0320	4.2800e- 003	0.0147	0.0190	0.0000	64.5600	64.5600	0.0160	8.3000e- 004	65.2077
Maximum	0.1992	0.3355	0.3696	7.3000e- 004	0.0201	0.0160	0.0327	6.3300e- 003	0.0147	0.0190	0.0000	64.5600	64.5600	0.0160	8.8000e- 004	65.2077

Mitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year					ton	s/yr							MT	/yr		
2022	0.0266	0.2602	0.2288	4.7000e- 004	0.0130	0.0126	0.0256	3.8400e- 003	0.0117	0.0155	0.0000	42.0756	42.0756	9.9000e- 003	8.8000e- 004	42.5844
2023	0.1992	0.3355	0.3696	7.3000e- 004	0.0160	0.0160	0.0320	4.2800e- 003	0.0147	0.0190	0.0000	64.5600	64.5600	0.0160	8.3000e- 004	65.2076
Maximum	0.1992	0.3355	0.3696	7.3000e- 004	0.0160	0.0160	0.0320	4.2800e- 003	0.0147	0.0190	0.0000	64.5600	64.5600	0.0160	8.8000e- 004	65.2076

CalEEMod Version: CalEEMod.2020.4.0 Page 5 of 32 Date: 12/20/2021 3:14 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	19.78	0.00	11.04	23.47	0.00	6.71	0.00	0.00	0.00	0.00	0.00	0.00

	Quarter	Start Date	End Date	Maximum Unmitigated ROG + NOX (tons/quarter)	Maximum Mitigated ROG + NOX (tons/quarter)
	1	11-1-2022	1-31-2023	0.3928	0.3928
	2	2-1-2023	4-30-2023	0.4208	0.4208
ſ			Highest	0.4208	0.4208

2.2 Overall Operational

Unmitigated Operational

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							МТ	-/yr		
Area	0.2215	0.0159	0.5405	9.0000e- 005	! !	3.7500e- 003	3.7500e- 003		3.7500e- 003	3.7500e- 003	0.0000	12.1144	12.1144	1.0600e- 003	2.1000e- 004	12.2022
Energy	3.6600e- 003	0.0313	0.0133	2.0000e- 004		2.5300e- 003	2.5300e- 003		2.5300e- 003	2.5300e- 003	0.0000	71.7573	71.7573	3.6900e- 003	1.0300e- 003	72.1559
Mobile	0.1186	0.1484	1.2509	2.7800e- 003	0.2887	2.0400e- 003	0.2907	0.0770	1.9000e- 003	0.0789	0.0000	259.4032	259.4032	0.0165	0.0114	263.2254
Waste						0.0000	0.0000		0.0000	0.0000	4.8555	0.0000	4.8555	0.2870	0.0000	12.0294
Water						0.0000	0.0000		0.0000	0.0000	0.8599	10.4673	11.3272	0.0892	2.1900e- 003	14.2106
Total	0.3437	0.1956	1.8047	3.0700e- 003	0.2887	8.3200e- 003	0.2970	0.0770	8.1800e- 003	0.0852	5.7154	353.7422	359.4576	0.3974	0.0149	373.8236

CalEEMod Version: CalEEMod.2020.4.0 Page 6 of 32 Date: 12/20/2021 3:14 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.2 Overall Operational

Mitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	ıs/yr							МТ	⁻ /yr		
Area	0.2215	0.0159	0.5405	9.0000e- 005		3.7500e- 003	3.7500e- 003		3.7500e- 003	3.7500e- 003	0.0000	12.1144	12.1144	1.0600e- 003	2.1000e- 004	12.2022
Energy	3.6600e- 003	0.0313	0.0133	2.0000e- 004		2.5300e- 003	2.5300e- 003		2.5300e- 003	2.5300e- 003	0.0000	71.7573	71.7573	3.6900e- 003	1.0300e- 003	72.1559
Mobile	0.1186	0.1484	1.2509	2.7800e- 003	0.2887	2.0400e- 003	0.2907	0.0770	1.9000e- 003	0.0789	0.0000	259.4032	259.4032	0.0165	0.0114	263.2254
Waste				,		0.0000	0.0000		0.0000	0.0000	4.8555	0.0000	4.8555	0.2870	0.0000	12.0294
Water				,		0.0000	0.0000		0.0000	0.0000	0.8599	10.4673	11.3272	0.0892	2.1900e- 003	14.2106
Total	0.3437	0.1956	1.8047	3.0700e- 003	0.2887	8.3200e- 003	0.2970	0.0770	8.1800e- 003	0.0852	5.7154	353.7422	359.4576	0.3974	0.0149	373.8236

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

3.0 Construction Detail

Construction Phase

Phase Number	Phase Name	Phase Type	Start Date	End Date	Num Days Week	Num Days	Phase Description
1	Demolition	Demolition	11/1/2022	11/14/2022	5	10	
2	Site Preparation	Site Preparation	11/15/2022	11/15/2022	5	1	
3	Grading	Grading	11/16/2022	11/17/2022	5	2	

14480 Whittier Resdiential - South Coast AQMD Air District, Annual

Date: 12/20/2021 3:14 PM

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

4	Building Construction	Building Construction	11/18/2022	4/6/2023	5	100	
	Paving	Paving	3/31/2023	4/6/2023	5	5	
6	Architectural Coating	Architectural Coating	3/31/2023	4/6/2023	5	5	

Acres of Grading (Site Preparation Phase): 1

Acres of Grading (Grading Phase): 3

Acres of Paving: 0

Residential Indoor: 105,300; Residential Outdoor: 35,100; Non-Residential Indoor: 0; Non-Residential Outdoor: 0; Striped Parking Area: 0 (Architectural Coating – sqft)

OffRoad Equipment

Phase Name	Offroad Equipment Type	Amount	Usage Hours	Horse Power	Load Factor
Demolition	Concrete/Industrial Saws	1	8.00	81	0.73
Demolition	Rubber Tired Dozers	1	8.00	247	0.40
Demolition	Tractors/Loaders/Backhoes	2	8.00	97	0.37
Site Preparation	Crawler Tractors	1	8.00	97	0.37
Site Preparation	Graders	1	8.00	187	0.41
Grading	Crawler Tractors	1	8.00	97	0.37
Grading	Graders	1	8.00	187	0.41
Grading	Rubber Tired Dozers	1	8.00	247	0.40
Building Construction	Cranes	1	8.00	231	0.29
Building Construction	Forklifts	2	8.00	89	0.20
Building Construction	Tractors/Loaders/Backhoes	2	8.00	97	0.37
Paving	Cement and Mortar Mixers	4	8.00	9	0.56
Paving	Pavers	1	8.00	130	0.42
Paving	Rollers	1	8.00	80	0.38
Paving	Tractors/Loaders/Backhoes	1	8.00	97	0.37
Architectural Coating	Air Compressors	1	8.00	78	0.48

14480 Whittier Resdiential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Trips and VMT

Phase Name	Offroad Equipment Count	Worker Trip Number	Vendor Trip Number	Hauling Trip Number	Worker Trip Length	Vendor Trip Length	Hauling Trip Length	Worker Vehicle Class	Vendor Vehicle Class	Hauling Vehicle Class
Demolition	4	10.00	0.00	33.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Site Preparation	2	5.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Grading	3	8.00	0.00	66.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Building Construction	5	37.00	6.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Paving	7	18.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Architectural Coating	1	7.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT

3.1 Mitigation Measures Construction

Water Exposed Area

3.2 **Demolition - 2022**

Unmitigated Construction On-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							MT	√yr		
Fugitive Dust					3.5300e- 003	0.0000	3.5300e- 003	5.3000e- 004	0.0000	5.3000e- 004	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
On reduce	7.6200e- 003	0.0747	0.0586	1.1000e- 004		3.7400e- 003	3.7400e- 003		3.5000e- 003	3.5000e- 003	0.0000	9.1724	9.1724	2.2400e- 003	0.0000	9.2285
Total	7.6200e- 003	0.0747	0.0586	1.1000e- 004	3.5300e- 003	3.7400e- 003	7.2700e- 003	5.3000e- 004	3.5000e- 003	4.0300e- 003	0.0000	9.1724	9.1724	2.2400e- 003	0.0000	9.2285

CalEEMod Version: CalEEMod.2020.4.0 Page 9 of 32 Date: 12/20/2021 3:14 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 Demolition - 2022

Unmitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e			
Category	tons/yr											MT/yr							
Hauling	7.0000e- 005	2.7100e- 003	6.2000e- 004	1.0000e- 005	2.8000e- 004	2.0000e- 005	3.1000e- 004	8.0000e- 005	2.0000e- 005	1.0000e- 004	0.0000	0.9938	0.9938	5.0000e- 005	1.6000e- 004	1.0422			
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000			
Worker	1.7000e- 004	1.4000e- 004	1.7700e- 003	0.0000	5.5000e- 004	0.0000	5.5000e- 004	1.5000e- 004	0.0000	1.5000e- 004	0.0000	0.4464	0.4464	1.0000e- 005	1.0000e- 005	0.4503			
Total	2.4000e- 004	2.8500e- 003	2.3900e- 003	1.0000e- 005	8.3000e- 004	2.0000e- 005	8.6000e- 004	2.3000e- 004	2.0000e- 005	2.5000e- 004	0.0000	1.4403	1.4403	6.0000e- 005	1.7000e- 004	1.4925			

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							MT	/yr		
Fugitive Dust					1.3800e- 003	0.0000	1.3800e- 003	2.1000e- 004	0.0000	2.1000e- 004	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	7.6200e- 003	0.0747	0.0586	1.1000e- 004	 	3.7400e- 003	3.7400e- 003	 	3.5000e- 003	3.5000e- 003	0.0000	9.1724	9.1724	2.2400e- 003	0.0000	9.2285
Total	7.6200e- 003	0.0747	0.0586	1.1000e- 004	1.3800e- 003	3.7400e- 003	5.1200e- 003	2.1000e- 004	3.5000e- 003	3.7100e- 003	0.0000	9.1724	9.1724	2.2400e- 003	0.0000	9.2285

CalEEMod Version: CalEEMod.2020.4.0 Page 10 of 32 Date: 12/20/2021 3:14 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 Demolition - 2022

Mitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	MT/yr										
Hauling	7.0000e- 005	2.7100e- 003	6.2000e- 004	1.0000e- 005	2.8000e- 004	2.0000e- 005	3.1000e- 004	8.0000e- 005	2.0000e- 005	1.0000e- 004	0.0000	0.9938	0.9938	5.0000e- 005	1.6000e- 004	1.0422
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	1.7000e- 004	1.4000e- 004	1.7700e- 003	0.0000	5.5000e- 004	0.0000	5.5000e- 004	1.5000e- 004	0.0000	1.5000e- 004	0.0000	0.4464	0.4464	1.0000e- 005	1.0000e- 005	0.4503
Total	2.4000e- 004	2.8500e- 003	2.3900e- 003	1.0000e- 005	8.3000e- 004	2.0000e- 005	8.6000e- 004	2.3000e- 004	2.0000e- 005	2.5000e- 004	0.0000	1.4403	1.4403	6.0000e- 005	1.7000e- 004	1.4925

3.3 Site Preparation - 2022

Unmitigated Construction On-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							MT	/yr		
Fugitive Dust					5.3000e- 004	0.0000	5.3000e- 004	6.0000e- 005	0.0000	6.0000e- 005	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	4.0000e- 004	4.2400e- 003	2.1000e- 003	0.0000		2.1000e- 004	2.1000e- 004	 	2.0000e- 004	2.0000e- 004	0.0000	0.4276	0.4276	1.4000e- 004	0.0000	0.4310
Total	4.0000e- 004	4.2400e- 003	2.1000e- 003	0.0000	5.3000e- 004	2.1000e- 004	7.4000e- 004	6.0000e- 005	2.0000e- 004	2.6000e- 004	0.0000	0.4276	0.4276	1.4000e- 004	0.0000	0.4310

CalEEMod Version: CalEEMod.2020.4.0 Page 11 of 32 Date: 12/20/2021 3:14 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.3 Site Preparation - 2022

Unmitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e			
Category	tons/yr											MT/yr							
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000			
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000			
Worker	1.0000e- 005	1.0000e- 005	9.0000e- 005	0.0000	3.0000e- 005	0.0000	3.0000e- 005	1.0000e- 005	0.0000	1.0000e- 005	0.0000	0.0223	0.0223	0.0000	0.0000	0.0225			
Total	1.0000e- 005	1.0000e- 005	9.0000e- 005	0.0000	3.0000e- 005	0.0000	3.0000e- 005	1.0000e- 005	0.0000	1.0000e- 005	0.0000	0.0223	0.0223	0.0000	0.0000	0.0225			

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e		
Category	tons/yr										MT/yr							
Fugitive Dust					2.1000e- 004	0.0000	2.1000e- 004	2.0000e- 005	0.0000	2.0000e- 005	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		
Off-Road	4.0000e- 004	4.2400e- 003	2.1000e- 003	0.0000	 	2.1000e- 004	2.1000e- 004	1 1 1 1	2.0000e- 004	2.0000e- 004	0.0000	0.4276	0.4276	1.4000e- 004	0.0000	0.4310		
Total	4.0000e- 004	4.2400e- 003	2.1000e- 003	0.0000	2.1000e- 004	2.1000e- 004	4.2000e- 004	2.0000e- 005	2.0000e- 004	2.2000e- 004	0.0000	0.4276	0.4276	1.4000e- 004	0.0000	0.4310		

CalEEMod Version: CalEEMod.2020.4.0 Page 12 of 32 Date: 12/20/2021 3:14 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.3 Site Preparation - 2022

Mitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							MT	/yr		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	1.0000e- 005	1.0000e- 005	9.0000e- 005	0.0000	3.0000e- 005	0.0000	3.0000e- 005	1.0000e- 005	0.0000	1.0000e- 005	0.0000	0.0223	0.0223	0.0000	0.0000	0.0225
Total	1.0000e- 005	1.0000e- 005	9.0000e- 005	0.0000	3.0000e- 005	0.0000	3.0000e- 005	1.0000e- 005	0.0000	1.0000e- 005	0.0000	0.0223	0.0223	0.0000	0.0000	0.0225

3.4 Grading - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							MT	/yr		
Fugitive Dust	11 11 11				7.6400e- 003	0.0000	7.6400e- 003	3.4900e- 003	0.0000	3.4900e- 003	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
	1.6300e- 003	0.0173	7.7900e- 003	2.0000e- 005		8.4000e- 004	8.4000e- 004		7.8000e- 004	7.8000e- 004	0.0000	1.6054	1.6054	5.2000e- 004	0.0000	1.6184
Total	1.6300e- 003	0.0173	7.7900e- 003	2.0000e- 005	7.6400e- 003	8.4000e- 004	8.4800e- 003	3.4900e- 003	7.8000e- 004	4.2700e- 003	0.0000	1.6054	1.6054	5.2000e- 004	0.0000	1.6184

CalEEMod Version: CalEEMod.2020.4.0 Page 13 of 32 Date: 12/20/2021 3:14 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Grading - 2022

Unmitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							MT	/yr		
Hauling	1.4000e- 004	5.4200e- 003	1.2400e- 003	2.0000e- 005	5.7000e- 004	4.0000e- 005	6.1000e- 004	1.6000e- 004	4.0000e- 005	2.0000e- 004	0.0000	1.9877	1.9877	1.1000e- 004	3.2000e- 004	2.0844
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	3.0000e- 005	2.0000e- 005	2.8000e- 004	0.0000	9.0000e- 005	0.0000	9.0000e- 005	2.0000e- 005	0.0000	2.0000e- 005	0.0000	0.0714	0.0714	0.0000	0.0000	0.0721
Total	1.7000e- 004	5.4400e- 003	1.5200e- 003	2.0000e- 005	6.6000e- 004	4.0000e- 005	7.0000e- 004	1.8000e- 004	4.0000e- 005	2.2000e- 004	0.0000	2.0591	2.0591	1.1000e- 004	3.2000e- 004	2.1564

Mitigated Construction On-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							MT	/yr		
Fugitive Dust			i i i		2.9800e- 003	0.0000	2.9800e- 003	1.3600e- 003	0.0000	1.3600e- 003	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
	1.6300e- 003	0.0173	7.7900e- 003	2.0000e- 005	 	8.4000e- 004	8.4000e- 004	 	7.8000e- 004	7.8000e- 004	0.0000	1.6054	1.6054	5.2000e- 004	0.0000	1.6184
Total	1.6300e- 003	0.0173	7.7900e- 003	2.0000e- 005	2.9800e- 003	8.4000e- 004	3.8200e- 003	1.3600e- 003	7.8000e- 004	2.1400e- 003	0.0000	1.6054	1.6054	5.2000e- 004	0.0000	1.6184

CalEEMod Version: CalEEMod.2020.4.0 Page 14 of 32 Date: 12/20/2021 3:14 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Grading - 2022

Mitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							MT	/yr		
Hauling	1.4000e- 004	5.4200e- 003	1.2400e- 003	2.0000e- 005	5.7000e- 004	4.0000e- 005	6.1000e- 004	1.6000e- 004	4.0000e- 005	2.0000e- 004	0.0000	1.9877	1.9877	1.1000e- 004	3.2000e- 004	2.0844
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	3.0000e- 005	2.0000e- 005	2.8000e- 004	0.0000	9.0000e- 005	0.0000	9.0000e- 005	2.0000e- 005	0.0000	2.0000e- 005	0.0000	0.0714	0.0714	0.0000	0.0000	0.0721
Total	1.7000e- 004	5.4400e- 003	1.5200e- 003	2.0000e- 005	6.6000e- 004	4.0000e- 005	7.0000e- 004	1.8000e- 004	4.0000e- 005	2.2000e- 004	0.0000	2.0591	2.0591	1.1000e- 004	3.2000e- 004	2.1564

3.5 Building Construction - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							МТ	/yr		
Off-Road	0.0144	0.1495	0.1345	2.3000e- 004		7.6500e- 003	7.6500e- 003		7.0400e- 003	7.0400e- 003	0.0000	20.4926	20.4926	6.6300e- 003	0.0000	20.6583
Total	0.0144	0.1495	0.1345	2.3000e- 004		7.6500e- 003	7.6500e- 003		7.0400e- 003	7.0400e- 003	0.0000	20.4926	20.4926	6.6300e- 003	0.0000	20.6583

CalEEMod Version: CalEEMod.2020.4.0 Page 15 of 32 Date: 12/20/2021 3:14 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Building Construction - 2022 <u>Unmitigated Construction Off-Site</u>

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							MT	/yr		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	1.7000e- 004	4.5400e- 003	1.5100e- 003	2.0000e- 005	5.9000e- 004	5.0000e- 005	6.3000e- 004	1.7000e- 004	4.0000e- 005	2.1000e- 004	0.0000	1.7356	1.7356	6.0000e- 005	2.5000e- 004	1.8121
Worker	1.9300e- 003	1.5600e- 003	0.0204	6.0000e- 005	6.2900e- 003	4.0000e- 005	6.3300e- 003	1.6700e- 003	4.0000e- 005	1.7100e- 003	0.0000	5.1204	5.1204	1.4000e- 004	1.4000e- 004	5.1648
Total	2.1000e- 003	6.1000e- 003	0.0219	8.0000e- 005	6.8800e- 003	9.0000e- 005	6.9600e- 003	1.8400e- 003	8.0000e- 005	1.9200e- 003	0.0000	6.8560	6.8560	2.0000e- 004	3.9000e- 004	6.9769

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							MT	/yr		
Off-Road	0.0144	0.1495	0.1345	2.3000e- 004		7.6500e- 003	7.6500e- 003		7.0400e- 003	7.0400e- 003	0.0000	20.4926	20.4926	6.6300e- 003	0.0000	20.6583
Total	0.0144	0.1495	0.1345	2.3000e- 004		7.6500e- 003	7.6500e- 003		7.0400e- 003	7.0400e- 003	0.0000	20.4926	20.4926	6.6300e- 003	0.0000	20.6583

CalEEMod Version: CalEEMod.2020.4.0 Page 16 of 32 Date: 12/20/2021 3:14 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Building Construction - 2022

Mitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							MT	/yr		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	1.7000e- 004	4.5400e- 003	1.5100e- 003	2.0000e- 005	5.9000e- 004	5.0000e- 005	6.3000e- 004	1.7000e- 004	4.0000e- 005	2.1000e- 004	0.0000	1.7356	1.7356	6.0000e- 005	2.5000e- 004	1.8121
Worker	1.9300e- 003	1.5600e- 003	0.0204	6.0000e- 005	6.2900e- 003	4.0000e- 005	6.3300e- 003	1.6700e- 003	4.0000e- 005	1.7100e- 003	0.0000	5.1204	5.1204	1.4000e- 004	1.4000e- 004	5.1648
Total	2.1000e- 003	6.1000e- 003	0.0219	8.0000e- 005	6.8800e- 003	9.0000e- 005	6.9600e- 003	1.8400e- 003	8.0000e- 005	1.9200e- 003	0.0000	6.8560	6.8560	2.0000e- 004	3.9000e- 004	6.9769

3.5 Building Construction - 2023

Unmitigated Construction On-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							MT	/yr		
Off-Road	0.0296	0.3038	0.2962	5.2000e- 004		0.0148	0.0148		0.0136	0.0136	0.0000	45.6334	45.6334	0.0148	0.0000	46.0023
Total	0.0296	0.3038	0.2962	5.2000e- 004		0.0148	0.0148		0.0136	0.0136	0.0000	45.6334	45.6334	0.0148	0.0000	46.0023

CalEEMod Version: CalEEMod.2020.4.0 Page 17 of 32 Date: 12/20/2021 3:14 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Building Construction - 2023 <u>Unmitigated Construction Off-Site</u>

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							МТ	/уг		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	2.2000e- 004	7.8900e- 003	3.0000e- 003	4.0000e- 005	1.3100e- 003	4.0000e- 005	1.3500e- 003	3.8000e- 004	4.0000e- 005	4.2000e- 004	0.0000	3.6840	3.6840	1.2000e- 004	5.3000e- 004	3.8462
Worker	3.9800e- 003	3.0600e- 003	0.0418	1.2000e- 004	0.0140	8.0000e- 005	0.0141	3.7200e- 003	7.0000e- 005	3.7900e- 003	0.0000	11.0972	11.0972	2.8000e- 004	2.8000e- 004	11.1883
Total	4.2000e- 003	0.0110	0.0448	1.6000e- 004	0.0153	1.2000e- 004	0.0154	4.1000e- 003	1.1000e- 004	4.2100e- 003	0.0000	14.7813	14.7813	4.0000e- 004	8.1000e- 004	15.0345

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							MT	/yr		
	0.0296	0.3038	0.2962	5.2000e- 004		0.0148	0.0148	 	0.0136	0.0136	0.0000	45.6333	45.6333	0.0148	0.0000	46.0023
Total	0.0296	0.3038	0.2962	5.2000e- 004		0.0148	0.0148		0.0136	0.0136	0.0000	45.6333	45.6333	0.0148	0.0000	46.0023

CalEEMod Version: CalEEMod.2020.4.0 Page 18 of 32 Date: 12/20/2021 3:14 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Building Construction - 2023

Mitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							MT	/yr		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	2.2000e- 004	7.8900e- 003	3.0000e- 003	4.0000e- 005	1.3100e- 003	4.0000e- 005	1.3500e- 003	3.8000e- 004	4.0000e- 005	4.2000e- 004	0.0000	3.6840	3.6840	1.2000e- 004	5.3000e- 004	3.8462
Worker	3.9800e- 003	3.0600e- 003	0.0418	1.2000e- 004	0.0140	8.0000e- 005	0.0141	3.7200e- 003	7.0000e- 005	3.7900e- 003	0.0000	11.0972	11.0972	2.8000e- 004	2.8000e- 004	11.1883
Total	4.2000e- 003	0.0110	0.0448	1.6000e- 004	0.0153	1.2000e- 004	0.0154	4.1000e- 003	1.1000e- 004	4.2100e- 003	0.0000	14.7813	14.7813	4.0000e- 004	8.1000e- 004	15.0345

3.6 Paving - 2023

Unmitigated Construction On-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							MT	/yr		
- Oil Roda	1.8300e- 003	0.0163	0.0205	3.0000e- 005		7.8000e- 004	7.8000e- 004		7.2000e- 004	7.2000e- 004	0.0000	2.7510	2.7510	7.9000e- 004	0.0000	2.7707
Paving	0.0000					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	1.8300e- 003	0.0163	0.0205	3.0000e- 005		7.8000e- 004	7.8000e- 004		7.2000e- 004	7.2000e- 004	0.0000	2.7510	2.7510	7.9000e- 004	0.0000	2.7707

CalEEMod Version: CalEEMod.2020.4.0 Page 19 of 32 Date: 12/20/2021 3:14 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.6 Paving - 2023
<u>Unmitigated Construction Off-Site</u>

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							MT	/yr		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
TVOING!	1.4000e- 004	1.1000e- 004	1.4700e- 003	0.0000	4.9000e- 004	0.0000	5.0000e- 004	1.3000e- 004	0.0000	1.3000e- 004	0.0000	0.3912	0.3912	1.0000e- 005	1.0000e- 005	0.3944
Total	1.4000e- 004	1.1000e- 004	1.4700e- 003	0.0000	4.9000e- 004	0.0000	5.0000e- 004	1.3000e- 004	0.0000	1.3000e- 004	0.0000	0.3912	0.3912	1.0000e- 005	1.0000e- 005	0.3944

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							MT	/yr		
On Road	1.8300e- 003	0.0163	0.0205	3.0000e- 005		7.8000e- 004	7.8000e- 004		7.2000e- 004	7.2000e- 004	0.0000	2.7510	2.7510	7.9000e- 004	0.0000	2.7707
Paving	0.0000		 			0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Total	1.8300e- 003	0.0163	0.0205	3.0000e- 005		7.8000e- 004	7.8000e- 004		7.2000e- 004	7.2000e- 004	0.0000	2.7510	2.7510	7.9000e- 004	0.0000	2.7707

CalEEMod Version: CalEEMod.2020.4.0 Page 20 of 32 Date: 12/20/2021 3:14 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.6 Paving - 2023

<u>Mitigated Construction Off-Site</u>

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							МТ	/yr		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	1.4000e- 004	1.1000e- 004	1.4700e- 003	0.0000	4.9000e- 004	0.0000	5.0000e- 004	1.3000e- 004	0.0000	1.3000e- 004	0.0000	0.3912	0.3912	1.0000e- 005	1.0000e- 005	0.3944
Total	1.4000e- 004	1.1000e- 004	1.4700e- 003	0.0000	4.9000e- 004	0.0000	5.0000e- 004	1.3000e- 004	0.0000	1.3000e- 004	0.0000	0.3912	0.3912	1.0000e- 005	1.0000e- 005	0.3944

3.7 Architectural Coating - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							MT	/yr		
Archit. Coating	0.1627					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	6.4000e- 004	4.3400e- 003	6.0400e- 003	1.0000e- 005		2.4000e- 004	2.4000e- 004	1 1 1 1	2.4000e- 004	2.4000e- 004	0.0000	0.8511	0.8511	5.0000e- 005	0.0000	0.8524
Total	0.1633	4.3400e- 003	6.0400e- 003	1.0000e- 005		2.4000e- 004	2.4000e- 004		2.4000e- 004	2.4000e- 004	0.0000	0.8511	0.8511	5.0000e- 005	0.0000	0.8524

CalEEMod Version: CalEEMod.2020.4.0 Page 21 of 32 Date: 12/20/2021 3:14 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.7 Architectural Coating - 2023 <u>Unmitigated Construction Off-Site</u>

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							МТ	/уг		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	5.0000e- 005	4.0000e- 005	5.7000e- 004	0.0000	1.9000e- 004	0.0000	1.9000e- 004	5.0000e- 005	0.0000	5.0000e- 005	0.0000	0.1521	0.1521	0.0000	0.0000	0.1534
Total	5.0000e- 005	4.0000e- 005	5.7000e- 004	0.0000	1.9000e- 004	0.0000	1.9000e- 004	5.0000e- 005	0.0000	5.0000e- 005	0.0000	0.1521	0.1521	0.0000	0.0000	0.1534

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							MT	/yr		
Archit. Coating	0.1627					0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Off-Road	6.4000e- 004	4.3400e- 003	6.0400e- 003	1.0000e- 005	 	2.4000e- 004	2.4000e- 004		2.4000e- 004	2.4000e- 004	0.0000	0.8511	0.8511	5.0000e- 005	0.0000	0.8524
Total	0.1633	4.3400e- 003	6.0400e- 003	1.0000e- 005		2.4000e- 004	2.4000e- 004		2.4000e- 004	2.4000e- 004	0.0000	0.8511	0.8511	5.0000e- 005	0.0000	0.8524

CalEEMod Version: CalEEMod.2020.4.0 Page 22 of 32 Date: 12/20/2021 3:14 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.7 Architectural Coating - 2023

Mitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							MT	/yr		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Worker	5.0000e- 005	4.0000e- 005	5.7000e- 004	0.0000	1.9000e- 004	0.0000	1.9000e- 004	5.0000e- 005	0.0000	5.0000e- 005	0.0000	0.1521	0.1521	0.0000	0.0000	0.1534
Total	5.0000e- 005	4.0000e- 005	5.7000e- 004	0.0000	1.9000e- 004	0.0000	1.9000e- 004	5.0000e- 005	0.0000	5.0000e- 005	0.0000	0.1521	0.1521	0.0000	0.0000	0.1534

CalEEMod Version: CalEEMod.2020.4.0 Page 23 of 32 Date: 12/20/2021 3:14 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

4.0 Operational Detail - Mobile

4.1 Mitigation Measures Mobile

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					ton	s/yr							MT	/yr		
Mitigated	0.1186	0.1484	1.2509	2.7800e- 003	0.2887	2.0400e- 003	0.2907	0.0770	1.9000e- 003	0.0789	0.0000	259.4032	259.4032	0.0165	0.0114	263.2254
Unmitigated	0.1186	0.1484	1.2509	2.7800e- 003	0.2887	2.0400e- 003	0.2907	0.0770	1.9000e- 003	0.0789	0.0000	259.4032	259.4032	0.0165	0.0114	263.2254

4.2 Trip Summary Information

	Aver	age Daily Trip Ra	ite	Unmitigated	Mitigated
Land Use	Weekday	Saturday	Sunday	Annual VMT	Annual VMT
Apartments Mid Rise	236.08	213.20	177.32	766,867	766,867
Total	236.08	213.20	177.32	766,867	766,867

4.3 Trip Type Information

		Miles			Trip %			Trip Purpos	e %
Land Use	H-W or C-W	H-S or C-C	H-O or C-NW	H-W or C-W	H-S or C-C	H-O or C-NW	Primary	Diverted	Pass-by
Apartments Mid Rise	14.70	5.90	8.70	40.20	19.20	40.60	86	11	3

4.4 Fleet Mix

Land Use	LDA	LDT1	LDT2	MDV	LHD1	LHD2	MHD	HHD	OBUS	UBUS	MCY	SBUS	MH
Apartments Mid Rise	0.543139	0.060749	0.184760	0.130258	0.023830	0.006353	0.011718	0.009137	0.000812	0.000509	0.024193	0.000750	0.003791

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.0 Energy Detail

Historical Energy Use: N

5.1 Mitigation Measures Energy

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category		tons/yr											MT	/yr		
Electricity Mitigated						0.0000	0.0000		0.0000	0.0000	0.0000	35.4986	35.4986	3.0000e- 003	3.6000e- 004	35.6817
Electricity Unmitigated	,,			1 1 1		0.0000	0.0000		0.0000	0.0000	0.0000	35.4986	35.4986	3.0000e- 003	3.6000e- 004	35.6817
NaturalGas Mitigated	3.6600e- 003	0.0313	0.0133	2.0000e- 004		2.5300e- 003	2.5300e- 003	 	2.5300e- 003	2.5300e- 003	0.0000	36.2587	36.2587	6.9000e- 004	6.6000e- 004	36.4742
NaturalGas Unmitigated	3.6600e- 003	0.0313	0.0133	2.0000e- 004		2.5300e- 003	2.5300e- 003		2.5300e- 003	2.5300e- 003	0.0000	36.2587	36.2587	6.9000e- 004	6.6000e- 004	36.4742

CalEEMod Version: CalEEMod.2020.4.0 Page 25 of 32 Date: 12/20/2021 3:14 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.2 Energy by Land Use - NaturalGas

Unmitigated

	NaturalGa s Use	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr		tons/yr											МТ	/yr		
Apartments Mid Rise	679463	3.6600e- 003	0.0313	0.0133	2.0000e- 004		2.5300e- 003	2.5300e- 003		2.5300e- 003	2.5300e- 003	0.0000	36.2587	36.2587	6.9000e- 004	6.6000e- 004	36.4742
Total		3.6600e- 003	0.0313	0.0133	2.0000e- 004		2.5300e- 003	2.5300e- 003		2.5300e- 003	2.5300e- 003	0.0000	36.2587	36.2587	6.9000e- 004	6.6000e- 004	36.4742

Mitigated

	NaturalGa s Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr		tons/yr MT/yr														
Apartments Mid Rise	679463	3.6600e- 003	0.0313	0.0133	2.0000e- 004		2.5300e- 003	2.5300e- 003		2.5300e- 003	2.5300e- 003	0.0000	36.2587	36.2587	6.9000e- 004	6.6000e- 004	36.4742
Total		3.6600e- 003	0.0313	0.0133	2.0000e- 004		2.5300e- 003	2.5300e- 003		2.5300e- 003	2.5300e- 003	0.0000	36.2587	36.2587	6.9000e- 004	6.6000e- 004	36.4742

CalEEMod Version: CalEEMod.2020.4.0 Page 26 of 32 Date: 12/20/2021 3:14 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.3 Energy by Land Use - Electricity <u>Unmitigated</u>

	Electricity Use	Total CO2	CH4	N2O	CO2e					
Land Use	kWh/yr	MT/yr								
Apartments Mid Rise	200166	35.4986	3.0000e- 003	3.6000e- 004	35.6817					
Total		35.4986	3.0000e- 003	3.6000e- 004	35.6817					

Mitigated

	Electricity Use	Total CO2	CH4	N2O	CO2e					
Land Use	kWh/yr	MT/yr								
Apartments Mid Rise	200166	35.4986	3.0000e- 003	3.6000e- 004	35.6817					
Total		35.4986	3.0000e- 003	3.6000e- 004	35.6817					

6.0 Area Detail

6.1 Mitigation Measures Area

CalEEMod Version: CalEEMod.2020.4.0 Page 27 of 32 Date: 12/20/2021 3:14 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category	tons/yr												MT	/yr		
Mitigated	0.2215	0.0159	0.5405	9.0000e- 005		3.7500e- 003	3.7500e- 003		3.7500e- 003	3.7500e- 003	0.0000	12.1144	12.1144	1.0600e- 003	2.1000e- 004	12.2022
Unmitigated	0.2215	0.0159	0.5405	9.0000e- 005		3.7500e- 003	3.7500e- 003		3.7500e- 003	3.7500e- 003	0.0000	12.1144	12.1144	1.0600e- 003	2.1000e- 004	12.2022

6.2 Area by SubCategory

Unmitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory	tons/yr												MT	/yr		
Architectural Coating	0.0163					0.0000	0.0000	 	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Consumer Products	0.1879				 	0.0000	0.0000	, 	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Hearth	1.1400e- 003	9.7000e- 003	4.1300e- 003	6.0000e- 005		7.8000e- 004	7.8000e- 004		7.8000e- 004	7.8000e- 004	0.0000	11.2384	11.2384	2.2000e- 004	2.1000e- 004	11.3052
Landscaping	0.0162	6.1800e- 003	0.5364	3.0000e- 005	 	2.9700e- 003	2.9700e- 003	 	2.9700e- 003	2.9700e- 003	0.0000	0.8760	0.8760	8.4000e- 004	0.0000	0.8970
Total	0.2215	0.0159	0.5405	9.0000e- 005		3.7500e- 003	3.7500e- 003		3.7500e- 003	3.7500e- 003	0.0000	12.1144	12.1144	1.0600e- 003	2.1000e- 004	12.2022

CalEEMod Version: CalEEMod.2020.4.0 Page 28 of 32 Date: 12/20/2021 3:14 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.2 Area by SubCategory

Mitigated

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory	tons/yr												MT	/yr		
Architectural Coating	0.0163		i i			0.0000	0.0000	 	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Consumer Products	0.1879		1 1 1		 	0.0000	0.0000	 	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000
Hearth	1.1400e- 003	9.7000e- 003	4.1300e- 003	6.0000e- 005	 	7.8000e- 004	7.8000e- 004	 	7.8000e- 004	7.8000e- 004	0.0000	11.2384	11.2384	2.2000e- 004	2.1000e- 004	11.3052
Landscaping	0.0162	6.1800e- 003	0.5364	3.0000e- 005		2.9700e- 003	2.9700e- 003	 	2.9700e- 003	2.9700e- 003	0.0000	0.8760	0.8760	8.4000e- 004	0.0000	0.8970
Total	0.2215	0.0159	0.5405	9.0000e- 005		3.7500e- 003	3.7500e- 003		3.7500e- 003	3.7500e- 003	0.0000	12.1144	12.1144	1.0600e- 003	2.1000e- 004	12.2022

7.0 Water Detail

7.1 Mitigation Measures Water

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	Total CO2	CH4	N2O	CO2e
Category		МТ	-/yr	
winigatod	11.3272	0.0892	2.1900e- 003	14.2106
Unmitigated	11.3272	0.0892	2.1900e- 003	14.2106

7.2 Water by Land Use <u>Unmitigated</u>

	Indoor/Out door Use	Total CO2	CH4	N2O	CO2e
Land Use	Mgal		MT	-/yr	
Apartments Mid Rise	2.71041 / 2.13592	11.3272	0.0892	2.1900e- 003	14.2106
Total		11.3272	0.0892	2.1900e- 003	14.2106

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

7.2 Water by Land Use

Mitigated

	Indoor/Out door Use	Total CO2	CH4	N2O	CO2e
Land Use	Mgal		МТ	/yr	
Apartments Mid Rise	2.71041 / 2.13592		0.0892	2.1900e- 003	14.2106
Total		11.3272	0.0892	2.1900e- 003	14.2106

8.0 Waste Detail

8.1 Mitigation Measures Waste

Category/Year

	Total CO2	CH4	N2O	CO2e						
	MT/yr									
		0.2870	0.0000	12.0294						
Unmitigated		0.2870	0.0000	12.0294						

Date: 12/20/2021 3:14 PM

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

8.2 Waste by Land Use

Unmitigated

	Waste Disposed	Total CO2	CH4	N2O	CO2e				
Land Use	tons	MT/yr							
Apartments Mid Rise	23.92	4.8555	0.2870	0.0000	12.0294				
Total		4.8555	0.2870	0.0000	12.0294				

Mitigated

	Waste Disposed	Total CO2	CH4	N2O	CO2e				
Land Use	tons	MT/yr							
Apartments Mid Rise	23.92	4.8555	0.2870	0.0000	12.0294				
Total		4.8555	0.2870	0.0000	12.0294				

9.0 Operational Offroad

Equipment Type	Number	Hours/Day	Days/Year	Horse Power	Load Factor	Fuel Type

CalEEMod Version: CalEEMod.2020.4.0 Page 32 of 32 Date: 12/20/2021 3:14 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Annual

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

10.0 Stationary Equipment

Fire Pumps and Emergency Generators

Equipment Type	Number	Hours/Day	Hours/Year	Horse Power	Load Factor	Fuel Type

Boilers

				D 11 D 11	
Equipment Type	Number	Heat Input/Day	Heat Input/Year	Boiler Rating	Fuel Type
				_	

User Defined Equipment

Equipment Type	Number

11.0 Vegetation

CalEEMod Version: CalEEMod.2020.4.0 Page 1 of 28 Date: 12/20/2021 3:19 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

14480 Whittier Resdiential

South Coast AQMD Air District, Summer

1.0 Project Characteristics

1.1 Land Usage

Land Uses	Size	Metric	Lot Acreage	Floor Surface Area	Population
Apartments Mid Rise	52.00	Dwelling Unit	0.82	52,000.00	149

1.2 Other Project Characteristics

UrbanizationUrbanWind Speed (m/s)2.2Precipitation Freq (Days)31

Climate Zone 9 Operational Year 2023

Utility Company Southern California Edison

 CO2 Intensity
 390.98
 CH4 Intensity
 0.033
 N20 Intensity
 0.004

 (lb/MWhr)
 (lb/MWhr)
 (lb/MWhr)
 (lb/MWhr)

1.3 User Entered Comments & Non-Default Data

Project Characteristics -

Land Use - Taken from Project Description

Construction Phase -

Off-road Equipment - Standard 8-hour work day

Off-road Equipment - Standard 8-hour work day

Off-road Equipment - Standard 8-hour work day

Off-road Equipment - T/L/B replaced with Crawler Tractor to accuretly calculate distrubance

Standard 8-hour work day

Off-road Equipment - Standard 8-hour work day

Off-road Equipment - T/L/B replaced with Crawler Tractor to accuretly calculate distrubance

Trips and VMT -

Demolition - Medical Office Building is 7,172 sf

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Grading - 689 CY of Cut and 1219 CY of Fill with a Total import of 530 CY

Vehicle Trips - Total trips from TIA report is 236

Vehicle Emission Factors - ex

Vehicle Emission Factors -

Vehicle Emission Factors -

Woodstoves - Per SCAQMD Rule 445 no wood burning devices

Water And Wastewater - Per CalGreen title 24 2013 20% reduction over year 2000 data

Construction Off-road Equipment Mitigation - Per SCAQMD Rule 403 Water 3 x a day, install tractout devices or sweep streets daily. Rule 403 Implementaion handbook = 46% for tractout devices.

Table Name	Column Name	Default Value	New Value
tblFireplaces	NumberGas	44.20	46.80
tblFireplaces	NumberWood	2.60	0.00
tblGrading	MaterialImported	0.00	530.00
tblLandUse	LotAcreage	1.37	0.82
tblOffRoadEquipment	HorsePower	212.00	97.00
tblOffRoadEquipment	HorsePower	212.00	97.00
tblOffRoadEquipment	LoadFactor	0.43	0.37
tblOffRoadEquipment	LoadFactor	0.43	0.37
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	4.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	7.00	8.00
tblOffRoadEquipment	UsageHours	7.00	8.00
tblOffRoadEquipment	UsageHours	1.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	7.00	8.00

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

tblVehicleTrips	ST_TR	4.91	4.10
tblVehicleTrips	SU_TR	4.09	3.41
tblVehicleTrips	WD_TR	5.44	4.54
tblWater	IndoorWaterUseRate	3,388,009.33	2,710,407.46
tblWoodstoves	NumberCatalytic	2.60	0.00
tblWoodstoves	NumberNoncatalytic	2.60	0.00
tblWoodstoves	WoodstoveDayYear	25.00	0.00
tblWoodstoves	WoodstoveWoodMass	999.60	0.00

2.0 Emissions Summary

CalEEMod Version: CalEEMod.2020.4.0 Page 4 of 28 Date: 12/20/2021 3:19 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.1 Overall Construction (Maximum Daily Emission)

Unmitigated Construction

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year	lb/day								lb/day							
2022	1.7990	22.4482	12.2273	0.0390	8.3095	0.8864	9.1958	3.6685	0.8170	4.4855	0.0000	4,042.638 1	4,042.638 1	0.6921	0.3497	4,164.158 5
2023	67.1269	17.3956	21.4681	0.0395	0.7314	0.8394	1.5708	0.1949	0.7844	0.9793	0.0000	3,785.122 8	3,785.122 8	0.8608	0.0310	3,815.892 0
Maximum	67.1269	22.4482	21.4681	0.0395	8.3095	0.8864	9.1958	3.6685	0.8170	4.4855	0.0000	4,042.638 1	4,042.638 1	0.8608	0.3497	4,164.158 5

Mitigated Construction

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year	lb/day								lb/day							
2022	1.7990	22.4482	12.2273	0.0390	3.6473	0.8864	4.5337	1.5417	0.8170	2.3587	0.0000	4,042.638 1	4,042.638 1	0.6921	0.3497	4,164.158 5
2023	67.1269	17.3956	21.4681	0.0395	0.7314	0.8394	1.5708	0.1949	0.7844	0.9793	0.0000	3,785.122 8	3,785.122 8	0.8608	0.0310	3,815.892 0
Maximum	67.1269	22.4482	21.4681	0.0395	3.6473	0.8864	4.5337	1.5417	0.8170	2.3587	0.0000	4,042.638 1	4,042.638 1	0.8608	0.3497	4,164.158 5

CalEEMod Version: CalEEMod.2020.4.0 Page 5 of 28 Date: 12/20/2021 3:19 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	51.57	0.00	43.30	55.05	0.00	38.92	0.00	0.00	0.00	0.00	0.00	0.00

CalEEMod Version: CalEEMod.2020.4.0 Page 6 of 28 Date: 12/20/2021 3:19 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.2 Overall Operational

Unmitigated Operational

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/e	day							lb/d	day		
Area	1.3389	0.8258	4.6214	5.1800e- 003		0.0865	0.0865	i i	0.0865	0.0865	0.0000	998.7835	998.7835	0.0264	0.0182	1,004.858 6
Energy	0.0201	0.1716	0.0730	1.1000e- 003	 	0.0139	0.0139		0.0139	0.0139		219.0049	219.0049	4.2000e- 003	4.0200e- 003	220.3063
Mobile	0.7210	0.7876	7.4215	0.0167	1.6997	0.0118	1.7115	0.4529	0.0110	0.4639		1,714.951 9	1,714.951 9	0.1028	0.0697	1,738.279 4
Total	2.0799	1.7849	12.1159	0.0229	1.6997	0.1122	1.8119	0.4529	0.1114	0.5643	0.0000	2,932.740 3	2,932.740 3	0.1335	0.0918	2,963.444 4

Mitigated Operational

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Area	1.3389	0.8258	4.6214	5.1800e- 003		0.0865	0.0865		0.0865	0.0865	0.0000	998.7835	998.7835	0.0264	0.0182	1,004.858 6
Energy	0.0201	0.1716	0.0730	1.1000e- 003		0.0139	0.0139		0.0139	0.0139		219.0049	219.0049	4.2000e- 003	4.0200e- 003	220.3063
Mobile	0.7210	0.7876	7.4215	0.0167	1.6997	0.0118	1.7115	0.4529	0.0110	0.4639		1,714.951 9	1,714.951 9	0.1028	0.0697	1,738.279 4
Total	2.0799	1.7849	12.1159	0.0229	1.6997	0.1122	1.8119	0.4529	0.1114	0.5643	0.0000	2,932.740 3	2,932.740 3	0.1335	0.0918	2,963.444 4

Date: 12/20/2021 3:19 PM

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

3.0 Construction Detail

Construction Phase

Phase Number	Phase Name	Phase Type	Start Date	End Date	Num Days Week	Num Days	Phase Description
1	Demolition	Demolition	11/1/2022	11/14/2022	5	10	
2	Site Preparation	Site Preparation	11/15/2022	11/15/2022	5	1	
3	Grading	Grading	11/16/2022	11/17/2022	5	2	
4	Building Construction	Building Construction	11/18/2022	4/6/2023	5	100	
5	Paving	Paving	3/31/2023	4/6/2023	5	5	
6	Architectural Coating	Architectural Coating	3/31/2023	4/6/2023	5	5	

Acres of Grading (Site Preparation Phase): 1

Acres of Grading (Grading Phase): 3

Acres of Paving: 0

Residential Indoor: 105,300; Residential Outdoor: 35,100; Non-Residential Indoor: 0; Non-Residential Outdoor: 0; Striped Parking Area: 0 (Architectural Coating – sqft)

OffRoad Equipment

Phase Name	Offroad Equipment Type	Amount	Usage Hours	Horse Power	Load Factor
Demolition	Concrete/Industrial Saws	1	8.00	81	0.73
Demolition	Rubber Tired Dozers	1	8.00	247	0.40
Demolition	Tractors/Loaders/Backhoes	2	8.00	97	0.37
Site Preparation	Crawler Tractors	1	8.00	97	0.37
Site Preparation	Graders	1	8.00	187	0.41

CalEEMod Version: CalEEMod.2020.4.0 Page 8 of 28 Date: 12/20/2021 3:19 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Grading	Crawler Tractors	1	8.00	97	0.37
Grading	Graders	1	8.00	187	0.41
Grading	Rubber Tired Dozers	1	8.00	247	0.40
Building Construction	Cranes	1	8.00	231	0.29
Building Construction	Forklifts	2	8.00	89	0.20
Building Construction	Tractors/Loaders/Backhoes	2	8.00	97	0.37
Paving	Cement and Mortar Mixers	4	8.00	9	0.56
Paving	Pavers	1	8.00	130	0.42
Paving	Rollers	1	8.00	80	0.38
Paving	Tractors/Loaders/Backhoes	1	8.00	97	0.37
Architectural Coating	Air Compressors	1	8.00	78	0.48

Trips and VMT

Phase Name	Offroad Equipment Count	Worker Trip Number	Vendor Trip Number	Hauling Trip Number	Worker Trip Length	Vendor Trip Length	Hauling Trip Length	Worker Vehicle Class	Vendor Vehicle Class	Hauling Vehicle Class
Demolition	4	10.00	0.00	33.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Site Preparation	2	5.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Grading	3	8.00	0.00	66.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Building Construction	5	37.00	6.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Paving	7	18.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Architectural Coating	1	7.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT

3.1 Mitigation Measures Construction

Water Exposed Area

CalEEMod Version: CalEEMod.2020.4.0 Page 9 of 28 Date: 12/20/2021 3:19 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 Demolition - 2022

Unmitigated Construction On-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Fugitive Dust					0.7060	0.0000	0.7060	0.1069	0.0000	0.1069			0.0000			0.0000
Off-Road	1.5242	14.9461	11.7226	0.0210		0.7478	0.7478		0.7000	0.7000		2,022.177 9	2,022.177 9	0.4947		2,034.544 5
Total	1.5242	14.9461	11.7226	0.0210	0.7060	0.7478	1.4538	0.1069	0.7000	0.8069		2,022.177 9	2,022.177 9	0.4947		2,034.544 5

Unmitigated Construction Off-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
Hauling	0.0139	0.5149	0.1231	2.0000e- 003	0.0577	4.3000e- 003	0.0620	0.0158	4.1200e- 003	0.0199		219.0674	219.0674	0.0118	0.0348	229.7250
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0344	0.0242	0.3817	1.0100e- 003	0.1118	6.7000e- 004	0.1124	0.0296	6.1000e- 004	0.0303		102.9147	102.9147	2.6700e- 003	2.4500e- 003	103.7106
Total	0.0484	0.5391	0.5048	3.0100e- 003	0.1695	4.9700e- 003	0.1745	0.0455	4.7300e- 003	0.0502		321.9822	321.9822	0.0144	0.0372	333.4356

CalEEMod Version: CalEEMod.2020.4.0 Page 10 of 28 Date: 12/20/2021 3:19 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 Demolition - 2022

Mitigated Construction On-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
Fugitive Dust					0.2753	0.0000	0.2753	0.0417	0.0000	0.0417			0.0000			0.0000
Off-Road	1.5242	14.9461	11.7226	0.0210		0.7478	0.7478		0.7000	0.7000	0.0000	2,022.177 9	2,022.177 9	0.4947		2,034.544 5
Total	1.5242	14.9461	11.7226	0.0210	0.2753	0.7478	1.0231	0.0417	0.7000	0.7417	0.0000	2,022.177 9	2,022.177 9	0.4947		2,034.544 5

Mitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
Hauling	0.0139	0.5149	0.1231	2.0000e- 003	0.0577	4.3000e- 003	0.0620	0.0158	4.1200e- 003	0.0199		219.0674	219.0674	0.0118	0.0348	229.7250
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0344	0.0242	0.3817	1.0100e- 003	0.1118	6.7000e- 004	0.1124	0.0296	6.1000e- 004	0.0303		102.9147	102.9147	2.6700e- 003	2.4500e- 003	103.7106
Total	0.0484	0.5391	0.5048	3.0100e- 003	0.1695	4.9700e- 003	0.1745	0.0455	4.7300e- 003	0.0502		321.9822	321.9822	0.0144	0.0372	333.4356

CalEEMod Version: CalEEMod.2020.4.0 Page 11 of 28 Date: 12/20/2021 3:19 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.3 Site Preparation - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Fugitive Dust					1.0605	0.0000	1.0605	0.1145	0.0000	0.1145			0.0000			0.0000
Off-Road	0.7949	8.4865	4.2062	9.7300e- 003		0.4254	0.4254		0.3914	0.3914		942.5966	942.5966	0.3049		950.2180
Total	0.7949	8.4865	4.2062	9.7300e- 003	1.0605	0.4254	1.4859	0.1145	0.3914	0.5059		942.5966	942.5966	0.3049		950.2180

Unmitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0172	0.0121	0.1909	5.1000e- 004	0.0559	3.3000e- 004	0.0562	0.0148	3.1000e- 004	0.0151		51.4574	51.4574	1.3400e- 003	1.2200e- 003	51.8553
Total	0.0172	0.0121	0.1909	5.1000e- 004	0.0559	3.3000e- 004	0.0562	0.0148	3.1000e- 004	0.0151		51.4574	51.4574	1.3400e- 003	1.2200e- 003	51.8553

CalEEMod Version: CalEEMod.2020.4.0 Page 12 of 28 Date: 12/20/2021 3:19 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.3 Site Preparation - 2022

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
Fugitive Dust	 				0.4136	0.0000	0.4136	0.0447	0.0000	0.0447			0.0000			0.0000
Off-Road	0.7949	8.4865	4.2062	9.7300e- 003		0.4254	0.4254		0.3914	0.3914	0.0000	942.5966	942.5966	0.3049		950.2180
Total	0.7949	8.4865	4.2062	9.7300e- 003	0.4136	0.4254	0.8390	0.0447	0.3914	0.4360	0.0000	942.5966	942.5966	0.3049		950.2180

Mitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0172	0.0121	0.1909	5.1000e- 004	0.0559	3.3000e- 004	0.0562	0.0148	3.1000e- 004	0.0151		51.4574	51.4574	1.3400e- 003	1.2200e- 003	51.8553
Total	0.0172	0.0121	0.1909	5.1000e- 004	0.0559	3.3000e- 004	0.0562	0.0148	3.1000e- 004	0.0151		51.4574	51.4574	1.3400e- 003	1.2200e- 003	51.8553

CalEEMod Version: CalEEMod.2020.4.0 Page 13 of 28 Date: 12/20/2021 3:19 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Grading - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Fugitive Dust	11 11 11				7.6428	0.0000	7.6428	3.4865	0.0000	3.4865			0.0000			0.0000
Off-Road	1.6320	17.2802	7.7882	0.0183		0.8428	0.8428		0.7754	0.7754		1,769.632 0	1,769.632 0	0.5723		1,783.940 3
Total	1.6320	17.2802	7.7882	0.0183	7.6428	0.8428	8.4856	3.4865	0.7754	4.2619		1,769.632 0	1,769.632 0	0.5723		1,783.940 3

Unmitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Hauling	0.1394	5.1487	1.2305	0.0200	0.5772	0.0431	0.6203	0.1582	0.0412	0.1994		2,190.674 4	2,190.674 4	0.1177	0.3478	2,297.249 8
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0276	0.0194	0.3054	8.1000e- 004	0.0894	5.3000e- 004	0.0900	0.0237	4.9000e- 004	0.0242		82.3318	82.3318	2.1400e- 003	1.9600e- 003	82.9685
Total	0.1670	5.1681	1.5358	0.0208	0.6667	0.0436	0.7102	0.1819	0.0417	0.2236		2,273.006 1	2,273.006 1	0.1198	0.3497	2,380.218 2

CalEEMod Version: CalEEMod.2020.4.0 Page 14 of 28 Date: 12/20/2021 3:19 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Grading - 2022

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Fugitive Dust					2.9807	0.0000	2.9807	1.3598	0.0000	1.3598			0.0000			0.0000
Off-Road	1.6320	17.2802	7.7882	0.0183		0.8428	0.8428		0.7754	0.7754	0.0000	1,769.632 0	1,769.632 0	0.5723		1,783.940 3
Total	1.6320	17.2802	7.7882	0.0183	2.9807	0.8428	3.8235	1.3598	0.7754	2.1351	0.0000	1,769.632 0	1,769.632 0	0.5723		1,783.940 3

Mitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/	day							lb/d	day		
Hauling	0.1394	5.1487	1.2305	0.0200	0.5772	0.0431	0.6203	0.1582	0.0412	0.1994		2,190.674 4	2,190.674 4	0.1177	0.3478	2,297.249 8
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0276	0.0194	0.3054	8.1000e- 004	0.0894	5.3000e- 004	0.0900	0.0237	4.9000e- 004	0.0242		82.3318	82.3318	2.1400e- 003	1.9600e- 003	82.9685
Total	0.1670	5.1681	1.5358	0.0208	0.6667	0.0436	0.7102	0.1819	0.0417	0.2236		2,273.006 1	2,273.006 1	0.1198	0.3497	2,380.218 2

CalEEMod Version: CalEEMod.2020.4.0 Page 15 of 28 Date: 12/20/2021 3:19 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Building Construction - 2022 <u>Unmitigated Construction On-Site</u>

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
	0.9296	9.6454	8.6757	0.0151		0.4937	0.4937		0.4542	0.4542		1,457.369 9	1,457.369 9	0.4713		1,469.153 5
Total	0.9296	9.6454	8.6757	0.0151		0.4937	0.4937		0.4542	0.4542		1,457.369 9	1,457.369 9	0.4713		1,469.153 5

Unmitigated Construction Off-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/d	day		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0109	0.2792	0.0957	1.1500e- 003	0.0384	2.9200e- 003	0.0413	0.0111	2.7900e- 003	0.0139		123.4016	123.4016	4.1400e- 003	0.0179	128.8364
Worker	0.1274	0.0897	1.4123	3.7400e- 003	0.4136	2.4700e- 003	0.4160	0.1097	2.2800e- 003	0.1120		380.7845	380.7845	9.8900e- 003	9.0500e- 003	383.7291
Total	0.1384	0.3688	1.5080	4.8900e- 003	0.4520	5.3900e- 003	0.4574	0.1207	5.0700e- 003	0.1258		504.1861	504.1861	0.0140	0.0269	512.5655

CalEEMod Version: CalEEMod.2020.4.0 Page 16 of 28 Date: 12/20/2021 3:19 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Building Construction - 2022

Mitigated Construction On-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	day		
	0.9296	9.6454	8.6757	0.0151		0.4937	0.4937	1 1 1	0.4542	0.4542	0.0000	1,457.369 9	1,457.369 9	0.4713		1,469.153 5
Total	0.9296	9.6454	8.6757	0.0151		0.4937	0.4937		0.4542	0.4542	0.0000	1,457.369 9	1,457.369 9	0.4713		1,469.153 5

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0109	0.2792	0.0957	1.1500e- 003	0.0384	2.9200e- 003	0.0413	0.0111	2.7900e- 003	0.0139		123.4016	123.4016	4.1400e- 003	0.0179	128.8364
Worker	0.1274	0.0897	1.4123	3.7400e- 003	0.4136	2.4700e- 003	0.4160	0.1097	2.2800e- 003	0.1120		380.7845	380.7845	9.8900e- 003	9.0500e- 003	383.7291
Total	0.1384	0.3688	1.5080	4.8900e- 003	0.4520	5.3900e- 003	0.4574	0.1207	5.0700e- 003	0.1258		504.1861	504.1861	0.0140	0.0269	512.5655

CalEEMod Version: CalEEMod.2020.4.0 Page 17 of 28 Date: 12/20/2021 3:19 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Building Construction - 2023

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
	0.8592	8.8062	8.5866	0.0151		0.4296	0.4296		0.3952	0.3952		1,458.033 9	1,458.033 9	0.4716		1,469.822 8
Total	0.8592	8.8062	8.5866	0.0151		0.4296	0.4296		0.3952	0.3952		1,458.033 9	1,458.033 9	0.4716		1,469.822 8

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	6.6300e- 003	0.2178	0.0858	1.0900e- 003	0.0384	1.2700e- 003	0.0397	0.0111	1.2100e- 003	0.0123		117.6186	117.6186	3.9500e- 003	0.0170	122.7916
Worker	0.1182	0.0793	1.3014	3.6200e- 003	0.4136	2.3300e- 003	0.4159	0.1097	2.1400e- 003	0.1118		370.7397	370.7397	8.8800e- 003	8.3600e- 003	373.4537
Total	0.1248	0.2971	1.3872	4.7100e- 003	0.4520	3.6000e- 003	0.4556	0.1207	3.3500e- 003	0.1241		488.3582	488.3582	0.0128	0.0254	496.2453

CalEEMod Version: CalEEMod.2020.4.0 Page 18 of 28 Date: 12/20/2021 3:19 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Building Construction - 2023

Mitigated Construction On-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	day		
	0.8592	8.8062	8.5866	0.0151		0.4296	0.4296	1 1 1	0.3952	0.3952	0.0000	1,458.033 9	1,458.033 9	0.4716		1,469.822 8
Total	0.8592	8.8062	8.5866	0.0151		0.4296	0.4296		0.3952	0.3952	0.0000	1,458.033 9	1,458.033 9	0.4716		1,469.822 8

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	6.6300e- 003	0.2178	0.0858	1.0900e- 003	0.0384	1.2700e- 003	0.0397	0.0111	1.2100e- 003	0.0123		117.6186	117.6186	3.9500e- 003	0.0170	122.7916
Worker	0.1182	0.0793	1.3014	3.6200e- 003	0.4136	2.3300e- 003	0.4159	0.1097	2.1400e- 003	0.1118		370.7397	370.7397	8.8800e- 003	8.3600e- 003	373.4537
Total	0.1248	0.2971	1.3872	4.7100e- 003	0.4520	3.6000e- 003	0.4556	0.1207	3.3500e- 003	0.1241		488.3582	488.3582	0.0128	0.0254	496.2453

CalEEMod Version: CalEEMod.2020.4.0 Page 19 of 28 Date: 12/20/2021 3:19 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.6 Paving - 2023
<u>Unmitigated Construction On-Site</u>

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Off-Road	0.7320	6.5013	8.2001	0.0133		0.3102	0.3102		0.2900	0.2900		1,212.966 8	1,212.966 8	0.3479		1,221.664 9
Paving	0.0000					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	0.7320	6.5013	8.2001	0.0133		0.3102	0.3102		0.2900	0.2900		1,212.966 8	1,212.966 8	0.3479		1,221.664 9

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category																
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0575	0.0386	0.6331	1.7600e- 003	0.2012	1.1300e- 003	0.2023	0.0534	1.0400e- 003	0.0544		180.3599	180.3599	4.3200e- 003	4.0700e- 003	181.6802
Total	0.0575	0.0386	0.6331	1.7600e- 003	0.2012	1.1300e- 003	0.2023	0.0534	1.0400e- 003	0.0544		180.3599	180.3599	4.3200e- 003	4.0700e- 003	181.6802

CalEEMod Version: CalEEMod.2020.4.0 Page 20 of 28 Date: 12/20/2021 3:19 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.6 Paving - 2023

<u>Mitigated Construction On-Site</u>

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Off-Road	0.7320	6.5013	8.2001	0.0133		0.3102	0.3102		0.2900	0.2900	0.0000	1,212.966 8	1,212.966 8	0.3479		1,221.664 9
Paving	0.0000					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	0.7320	6.5013	8.2001	0.0133		0.3102	0.3102		0.2900	0.2900	0.0000	1,212.966 8	1,212.966 8	0.3479		1,221.664 9

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0575	0.0386	0.6331	1.7600e- 003	0.2012	1.1300e- 003	0.2023	0.0534	1.0400e- 003	0.0544		180.3599	180.3599	4.3200e- 003	4.0700e- 003	181.6802
Total	0.0575	0.0386	0.6331	1.7600e- 003	0.2012	1.1300e- 003	0.2023	0.0534	1.0400e- 003	0.0544		180.3599	180.3599	4.3200e- 003	4.0700e- 003	181.6802

CalEEMod Version: CalEEMod.2020.4.0 Page 21 of 28 Date: 12/20/2021 3:19 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.7 Architectural Coating - 2023 <u>Unmitigated Construction On-Site</u>

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Archit. Coating	65.0754					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Off-Road	0.2556	1.7373	2.4148	3.9600e- 003		0.0944	0.0944		0.0944	0.0944		375.2641	375.2641	0.0225		375.8253
Total	65.3310	1.7373	2.4148	3.9600e- 003		0.0944	0.0944		0.0944	0.0944		375.2641	375.2641	0.0225		375.8253

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category																
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0224	0.0150	0.2462	6.9000e- 004	0.0782	4.4000e- 004	0.0787	0.0208	4.1000e- 004	0.0212		70.1399	70.1399	1.6800e- 003	1.5800e- 003	70.6534
Total	0.0224	0.0150	0.2462	6.9000e- 004	0.0782	4.4000e- 004	0.0787	0.0208	4.1000e- 004	0.0212		70.1399	70.1399	1.6800e- 003	1.5800e- 003	70.6534

CalEEMod Version: CalEEMod.2020.4.0 Page 22 of 28 Date: 12/20/2021 3:19 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.7 Architectural Coating - 2023

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	day		
Archit. Coating	65.0754					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Off-Road	0.2556	1.7373	2.4148	3.9600e- 003		0.0944	0.0944		0.0944	0.0944	0.0000	375.2641	375.2641	0.0225	 	375.8253
Total	65.3310	1.7373	2.4148	3.9600e- 003		0.0944	0.0944		0.0944	0.0944	0.0000	375.2641	375.2641	0.0225		375.8253

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0224	0.0150	0.2462	6.9000e- 004	0.0782	4.4000e- 004	0.0787	0.0208	4.1000e- 004	0.0212		70.1399	70.1399	1.6800e- 003	1.5800e- 003	70.6534
Total	0.0224	0.0150	0.2462	6.9000e- 004	0.0782	4.4000e- 004	0.0787	0.0208	4.1000e- 004	0.0212		70.1399	70.1399	1.6800e- 003	1.5800e- 003	70.6534

CalEEMod Version: CalEEMod.2020.4.0 Page 23 of 28 Date: 12/20/2021 3:19 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

4.0 Operational Detail - Mobile

4.1 Mitigation Measures Mobile

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Mitigated	0.7210	0.7876	7.4215	0.0167	1.6997	0.0118	1.7115	0.4529	0.0110	0.4639		1,714.951 9	1,714.951 9	0.1028	0.0697	1,738.279 4
Unmitigated	0.7210	0.7876	7.4215	0.0167	1.6997	0.0118	1.7115	0.4529	0.0110	0.4639		1,714.951 9	1,714.951 9	0.1028	0.0697	1,738.279 4

4.2 Trip Summary Information

	Ave	rage Daily Trip Ra	ite	Unmitigated	Mitigated
Land Use	Weekday	Saturday	Sunday	Annual VMT	Annual VMT
Apartments Mid Rise	236.08	213.20	177.32	766,867	766,867
Total	236.08	213.20	177.32	766,867	766,867

4.3 Trip Type Information

		Miles			Trip %			Trip Purpos	e %
Land Use	H-W or C-W	H-S or C-C	H-O or C-NW	H-W or C-W	H-S or C-C	H-O or C-NW	Primary	Diverted	Pass-by
Apartments Mid Rise	14.70	5.90	8.70	40.20	19.20	40.60	86	11	3

4.4 Fleet Mix

Land Use	LDA	LDT1	LDT2	MDV	LHD1	LHD2	MHD	HHD	OBUS	UBUS	MCY	SBUS	МН
Apartments Mid Rise	0.543139	0.060749	0.184760	0.130258	0.023830	0.006353	0.011718	0.009137	0.000812	0.000509	0.024193	0.000750	0.003791

CalEEMod Version: CalEEMod.2020.4.0 Page 24 of 28 Date: 12/20/2021 3:19 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.0 Energy Detail

Historical Energy Use: N

5.1 Mitigation Measures Energy

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	lay							lb/d	day		
NaturalGas Mitigated	0.0201	0.1716	0.0730	1.1000e- 003		0.0139	0.0139		0.0139	0.0139		219.0049	219.0049	4.2000e- 003	4.0200e- 003	220.3063
NaturalGas Unmitigated	0.0201	0.1716	0.0730	1.1000e- 003		0.0139	0.0139		0.0139	0.0139		219.0049	219.0049	4.2000e- 003	4.0200e- 003	220.3063

5.2 Energy by Land Use - NaturalGas

Unmitigated

	NaturalGa s Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr					lb/d	day							lb/d	day		
Apartments Mid Rise	1861.54	0.0201	0.1716	0.0730	1.1000e- 003		0.0139	0.0139		0.0139	0.0139		219.0049	219.0049	4.2000e- 003	4.0200e- 003	220.3063
Total		0.0201	0.1716	0.0730	1.1000e- 003		0.0139	0.0139		0.0139	0.0139		219.0049	219.0049	4.2000e- 003	4.0200e- 003	220.3063

CalEEMod Version: CalEEMod.2020.4.0 Page 25 of 28 Date: 12/20/2021 3:19 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.2 Energy by Land Use - NaturalGas

Mitigated

	NaturalGa s Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr					lb/d	day							lb/d	lay		
Apartments Mid Rise	1.86154	0.0201	0.1716	0.0730	1.1000e- 003		0.0139	0.0139		0.0139	0.0139		219.0049	219.0049	4.2000e- 003	4.0200e- 003	220.3063
Total		0.0201	0.1716	0.0730	1.1000e- 003		0.0139	0.0139		0.0139	0.0139		219.0049	219.0049	4.2000e- 003	4.0200e- 003	220.3063

6.0 Area Detail

6.1 Mitigation Measures Area

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Mitigated	1.3389	0.8258	4.6214	5.1800e- 003		0.0865	0.0865		0.0865	0.0865	0.0000	998.7835	998.7835	0.0264	0.0182	1,004.858 6
Unmitigated	1.3389	0.8258	4.6214	5.1800e- 003		0.0865	0.0865		0.0865	0.0865	0.0000	998.7835	998.7835	0.0264	0.0182	1,004.858 6

14480 Whittier Resdiential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.2 Area by SubCategory

Unmitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory					lb/d	day							lb/d	day		
Architectural Coating	0.0891					0.0000	0.0000	 	0.0000	0.0000			0.0000			0.0000
	1.0296					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Hearth	0.0909	0.7763	0.3304	4.9600e- 003		0.0628	0.0628		0.0628	0.0628	0.0000	991.0588	991.0588	0.0190	0.0182	996.9482
Landscaping	0.1293	0.0495	4.2910	2.3000e- 004		0.0238	0.0238		0.0238	0.0238		7.7247	7.7247	7.4300e- 003		7.9104
Total	1.3389	0.8258	4.6214	5.1900e- 003		0.0865	0.0865		0.0865	0.0865	0.0000	998.7835	998.7835	0.0264	0.0182	1,004.858 6

CalEEMod Version: CalEEMod.2020.4.0 Page 27 of 28 Date: 12/20/2021 3:19 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.2 Area by SubCategory

Mitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory					lb/d	day							lb/c	lay		
	0.0891					0.0000	0.0000	 	0.0000	0.0000			0.0000			0.0000
Consumer Products	1.0296				 	0.0000	0.0000	 	0.0000	0.0000			0.0000			0.0000
Hearth	0.0909	0.7763	0.3304	4.9600e- 003	 	0.0628	0.0628	 	0.0628	0.0628	0.0000	991.0588	991.0588	0.0190	0.0182	996.9482
Landscaping	0.1293	0.0495	4.2910	2.3000e- 004		0.0238	0.0238	 	0.0238	0.0238		7.7247	7.7247	7.4300e- 003		7.9104
Total	1.3389	0.8258	4.6214	5.1900e- 003		0.0865	0.0865		0.0865	0.0865	0.0000	998.7835	998.7835	0.0264	0.0182	1,004.858 6

7.0 Water Detail

7.1 Mitigation Measures Water

CalEEMod Version: CalEEMod.2020.4.0 Page 28 of 28 Date: 12/20/2021 3:19 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Summer

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

8.0 Waste Detail

8.1 Mitigation Measures Waste

9.0 Operational Offroad

Equipment Type	Number	Hours/Day	Days/Year	Horse Power	Load Factor	Fuel Type

10.0 Stationary Equipment

Fire Pumps and Emergency Generators

Equipment Type	Number	Hours/Day	Hours/Year	Horse Power	Load Factor	Fuel Type
----------------	--------	-----------	------------	-------------	-------------	-----------

Boilers

Equipment Type	Number	Heat Input/Day	Heat Input/Year	Boiler Rating	Fuel Type

User Defined Equipment

Equipment Type	Number

11.0 Vegetation

CalEEMod Version: CalEEMod.2020.4.0 Page 1 of 28 Date: 12/20/2021 3:20 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

14480 Whittier Resdiential

South Coast AQMD Air District, Winter

1.0 Project Characteristics

1.1 Land Usage

Land Uses	Size	Metric	Lot Acreage	Floor Surface Area	Population
Apartments Mid Rise	52.00	Dwelling Unit	0.82	52,000.00	149

1.2 Other Project Characteristics

Urbanization Wind Speed (m/s) Precipitation Freq (Days) Urban 2.2 9 Climate Zone

Operational Year 2023

Southern California Edison **Utility Company**

CO2 Intensity 390.98 **CH4 Intensity** 0.033 **N2O Intensity** 0.004 (lb/MWhr) (lb/MWhr) (lb/MWhr)

1.3 User Entered Comments & Non-Default Data

Project Characteristics -

Land Use - Taken from Project Description

Construction Phase -

Off-road Equipment - Standard 8-hour work day

Off-road Equipment - Standard 8-hour work day

Off-road Equipment - Standard 8-hour work day

Off-road Equipment - T/L/B replaced with Crawler Tractor to accuretly calculate distrubance

Standard 8-hour work day

Off-road Equipment - Standard 8-hour work day

Off-road Equipment - T/L/B replaced with Crawler Tractor to accuretly calculate distrubance

Trips and VMT -

Demolition - Medical Office Building is 7,172 sf

14480 Whittier Resdiential - South Coast AQMD Air District, Winter

Date: 12/20/2021 3:20 PM

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Grading - 689 CY of Cut and 1219 CY of Fill with a Total import of 530 CY

Vehicle Trips - Total trips from TIA report is 236

Vehicle Emission Factors - ex

Vehicle Emission Factors -

Vehicle Emission Factors -

Woodstoves - Per SCAQMD Rule 445 no wood burning devices

Water And Wastewater - Per CalGreen title 24 2013 20% reduction over year 2000 data

Construction Off-road Equipment Mitigation - Per SCAQMD Rule 403 Water 3 x a day, install tractout devices or sweep streets daily. Rule 403 Implementaion handbook = 46% for tractout devices.

Table Name	Column Name	Default Value	New Value
tblFireplaces	NumberGas	44.20	46.80
tblFireplaces	NumberWood	2.60	0.00
tblGrading	MaterialImported	0.00	530.00
tblLandUse	LotAcreage	1.37	0.82
tblOffRoadEquipment	HorsePower	212.00	97.00
tblOffRoadEquipment	HorsePower	212.00	97.00
tblOffRoadEquipment	LoadFactor	0.43	0.37
tblOffRoadEquipment	LoadFactor	0.43	0.37
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	4.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	7.00	8.00
tblOffRoadEquipment	UsageHours	7.00	8.00
tblOffRoadEquipment	UsageHours	1.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	6.00	8.00
tblOffRoadEquipment	UsageHours	7.00	8.00

14480 Whittier Resdiential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

tblVehicleTrips	ST_TR	4.91	4.10
tblVehicleTrips	SU_TR	4.09	3.41
tblVehicleTrips	WD_TR	5.44	4.54
tblWater	IndoorWaterUseRate	3,388,009.33	2,710,407.46
tblWoodstoves	NumberCatalytic	2.60	0.00
tblWoodstoves	NumberNoncatalytic	2.60	0.00
tblWoodstoves	WoodstoveDayYear	25.00	0.00
tblWoodstoves	WoodstoveWoodMass	999.60	0.00

2.0 Emissions Summary

CalEEMod Version: CalEEMod.2020.4.0 Page 4 of 28 Date: 12/20/2021 3:20 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.1 Overall Construction (Maximum Daily Emission)

Unmitigated Construction

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year					lb/d	day							lb/d	day		
2022	1.7966	22.6763	12.1930	0.0390	8.3095	0.8864	9.1959	3.6685	0.8171	4.4856	0.0000	4,038.657 7	4,038.657 7	0.6920	0.3500	4,160.249 8
2023	67.1376	17.4188	21.2636	0.0391	0.7314	0.8394	1.5708	0.1949	0.7844	0.9793	0.0000	3,749.282 3	3,749.282 3	0.8609	0.0319	3,780.323 3
Maximum	67.1376	22.6763	21.2636	0.0391	8.3095	0.8864	9.1959	3.6685	0.8171	4.4856	0.0000	4,038.657 7	4,038.657 7	0.8609	0.3500	4,160.249 8

Mitigated Construction

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Year					lb/d	day							lb/c	lay		
2022	1.7966	22.6763	12.1930	0.0390	3.6473	0.8864	4.5338	1.5417	0.8171	2.3588	0.0000	4,038.657 7	4,038.657 7	0.6920	0.3500	4,160.249 8
2023	67.1376	17.4188	21.2636	0.0391	0.7314	0.8394	1.5708	0.1949	0.7844	0.9793	0.0000	3,749.282 3	3,749.282 3	0.8609	0.0319	3,780.323 3
Maximum	67.1376	22.6763	21.2636	0.0391	3.6473	0.8864	4.5338	1.5417	0.8171	2.3588	0.0000	4,038.657 7	4,038.657 7	0.8609	0.3500	4,160.249 8

CalEEMod Version: CalEEMod.2020.4.0 Page 5 of 28 Date: 12/20/2021 3:20 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	51.57	0.00	43.30	55.05	0.00	38.92	0.00	0.00	0.00	0.00	0.00	0.00

CalEEMod Version: CalEEMod.2020.4.0 Page 6 of 28 Date: 12/20/2021 3:20 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

2.2 Overall Operational

Unmitigated Operational

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category		lb/day											lb/c	lay		
Area	1.3389	0.8258	4.6214	5.1800e- 003		0.0865	0.0865		0.0865	0.0865	0.0000	998.7835	998.7835	0.0264	0.0182	1,004.858 6
Energy	0.0201	0.1716	0.0730	1.1000e- 003		0.0139	0.0139		0.0139	0.0139		219.0049	219.0049	4.2000e- 003	4.0200e- 003	220.3063
Mobile	0.6954	0.8466	7.1428	0.0159	1.6997	0.0118	1.7115	0.4529	0.0110	0.4639		1,634.964 1	1,634.964 1	0.1057	0.0724	1,659.192 9
Total	2.0543	1.8440	11.8372	0.0222	1.6997	0.1122	1.8119	0.4529	0.1114	0.5643	0.0000	2,852.752 6	2,852.752 6	0.1363	0.0946	2,884.357 8

Mitigated Operational

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e	
Category		lb/day											lb/day				
Area	1.3389	0.8258	4.6214	5.1800e- 003		0.0865	0.0865		0.0865	0.0865	0.0000	998.7835	998.7835	0.0264	0.0182	1,004.858 6	
Energy	0.0201	0.1716	0.0730	1.1000e- 003		0.0139	0.0139		0.0139	0.0139		219.0049	219.0049	4.2000e- 003	4.0200e- 003	220.3063	
Mobile	0.6954	0.8466	7.1428	0.0159	1.6997	0.0118	1.7115	0.4529	0.0110	0.4639		1,634.964 1	1,634.964 1	0.1057	0.0724	1,659.192 9	
Total	2.0543	1.8440	11.8372	0.0222	1.6997	0.1122	1.8119	0.4529	0.1114	0.5643	0.0000	2,852.752 6	2,852.752 6	0.1363	0.0946	2,884.357 8	

14480 Whittier Resdiential - South Coast AQMD Air District, Winter

Date: 12/20/2021 3:20 PM

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio-CO2	Total CO2	CH4	N20	CO2e
Percent Reduction	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00

3.0 Construction Detail

Construction Phase

Phase Number	Phase Name	Phase Type	Start Date	End Date	Num Days Week	Num Days	Phase Description
1	Demolition	Demolition	11/1/2022	11/14/2022	5	10	
2	Site Preparation	Site Preparation	11/15/2022	11/15/2022	5	1	
3	Grading	Grading	11/16/2022	11/17/2022	5	2	
4	Building Construction	Building Construction	11/18/2022	4/6/2023	5	100	
5	Paving	Paving	3/31/2023	4/6/2023	5	5	
6	Architectural Coating	Architectural Coating	3/31/2023	4/6/2023	5	5	

Acres of Grading (Site Preparation Phase): 1

Acres of Grading (Grading Phase): 3

Acres of Paving: 0

Residential Indoor: 105,300; Residential Outdoor: 35,100; Non-Residential Indoor: 0; Non-Residential Outdoor: 0; Striped Parking Area: 0 (Architectural Coating – sqft)

OffRoad Equipment

Phase Name	Offroad Equipment Type	Amount	Usage Hours	Horse Power	Load Factor
Demolition	Concrete/Industrial Saws	1	8.00	81	0.73
Demolition	Rubber Tired Dozers	1	8.00	247	0.40
Demolition	Tractors/Loaders/Backhoes	2	8.00	97	0.37
Site Preparation	Crawler Tractors	1	8.00	97	0.37
Site Preparation	Graders	1	8.00	187	0.41

CalEEMod Version: CalEEMod.2020.4.0 Page 8 of 28 Date: 12/20/2021 3:20 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

Grading	Crawler Tractors	1	8.00	97	0.37
Grading	Graders	1	8.00	187	0.41
Grading	Rubber Tired Dozers	1	8.00	247	0.40
Building Construction	Cranes	1	8.00	231	0.29
Building Construction	Forklifts	2	8.00	89	0.20
Building Construction	Tractors/Loaders/Backhoes	2	8.00	97	0.37
Paving	Cement and Mortar Mixers	4	8.00	9	0.56
Paving	Pavers	1	8.00	130	0.42
Paving	Rollers	1	8.00	80	0.38
Paving	Tractors/Loaders/Backhoes	1	8.00	97	0.37
Architectural Coating	Air Compressors	1	8.00	78	0.48

Trips and VMT

Phase Name	Offroad Equipment Count	Worker Trip Number	Vendor Trip Number	Hauling Trip Number	Worker Trip Length	Vendor Trip Length	Hauling Trip Length	Worker Vehicle Class	Vendor Vehicle Class	Hauling Vehicle Class
Demolition	4	10.00	0.00	33.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Site Preparation	2	5.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Grading	3	8.00	0.00	66.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Building Construction	5	37.00	6.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Paving	7	18.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT
Architectural Coating	1	7.00	0.00	0.00	14.70	6.90	20.00	LD_Mix	HDT_Mix	HHDT

3.1 Mitigation Measures Construction

Water Exposed Area

CalEEMod Version: CalEEMod.2020.4.0 Page 9 of 28 Date: 12/20/2021 3:20 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 Demolition - 2022

Unmitigated Construction On-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Fugitive Dust					0.7060	0.0000	0.7060	0.1069	0.0000	0.1069			0.0000			0.0000
Off-Road	1.5242	14.9461	11.7226	0.0210		0.7478	0.7478		0.7000	0.7000		2,022.177 9	2,022.177 9	0.4947		2,034.544 5
Total	1.5242	14.9461	11.7226	0.0210	0.7060	0.7478	1.4538	0.1069	0.7000	0.8069		2,022.177 9	2,022.177 9	0.4947		2,034.544 5

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
Hauling	0.0136	0.5375	0.1254	2.0000e- 003	0.0577	4.3100e- 003	0.0620	0.0158	4.1300e- 003	0.0200		219.1481	219.1481	0.0118	0.0348	229.8092
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0362	0.0265	0.3451	9.5000e- 004	0.1118	6.7000e- 004	0.1124	0.0296	6.1000e- 004	0.0303		96.9305	96.9305	2.7000e- 003	2.6000e- 003	97.7717
Total	0.0498	0.5640	0.4704	2.9500e- 003	0.1695	4.9800e- 003	0.1745	0.0455	4.7400e- 003	0.0502		316.0787	316.0787	0.0145	0.0374	327.5809

CalEEMod Version: CalEEMod.2020.4.0 Page 10 of 28 Date: 12/20/2021 3:20 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.2 Demolition - 2022

<u>Mitigated Construction On-Site</u>

ROG NOx CO SO2 Fugitive PM10 PM10 Fugitive PM2.5 PM2.5 Bio- CO2 NBio- CO2 Total CO2 CH4 N2O CO2e Exhaust Exhaust PM10 PM2.5 Total Total Category lb/day lb/day 0.2753 0.0000 0.2753 Fugitive Dust 0.0417 0.0000 0.0417 0.0000 0.0000 1.5242 14.9461 11.7226 0.0210 0.7478 0.7478 2,022.177 2,022.177 0.4947 0.7000 0.7000 0.0000 Off-Road 2,034.544 5 1.5242 11.7226 0.0210 0.2753 1.0231 0.7417 2,022.177 2,022.177 0.4947 Total 14.9461 0.7478 0.0417 0.7000 0.0000 2,034.544 5

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
Hauling	0.0136	0.5375	0.1254	2.0000e- 003	0.0577	4.3100e- 003	0.0620	0.0158	4.1300e- 003	0.0200		219.1481	219.1481	0.0118	0.0348	229.8092
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0362	0.0265	0.3451	9.5000e- 004	0.1118	6.7000e- 004	0.1124	0.0296	6.1000e- 004	0.0303		96.9305	96.9305	2.7000e- 003	2.6000e- 003	97.7717
Total	0.0498	0.5640	0.4704	2.9500e- 003	0.1695	4.9800e- 003	0.1745	0.0455	4.7400e- 003	0.0502		316.0787	316.0787	0.0145	0.0374	327.5809

CalEEMod Version: CalEEMod.2020.4.0 Page 11 of 28 Date: 12/20/2021 3:20 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.3 Site Preparation - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Fugitive Dust					1.0605	0.0000	1.0605	0.1145	0.0000	0.1145			0.0000			0.0000
Off-Road	0.7949	8.4865	4.2062	9.7300e- 003		0.4254	0.4254		0.3914	0.3914		942.5966	942.5966	0.3049		950.2180
Total	0.7949	8.4865	4.2062	9.7300e- 003	1.0605	0.4254	1.4859	0.1145	0.3914	0.5059		942.5966	942.5966	0.3049		950.2180

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0181	0.0133	0.1725	4.8000e- 004	0.0559	3.3000e- 004	0.0562	0.0148	3.1000e- 004	0.0151		48.4653	48.4653	1.3500e- 003	1.3000e- 003	48.8859
Total	0.0181	0.0133	0.1725	4.8000e- 004	0.0559	3.3000e- 004	0.0562	0.0148	3.1000e- 004	0.0151		48.4653	48.4653	1.3500e- 003	1.3000e- 003	48.8859

CalEEMod Version: CalEEMod.2020.4.0 Page 12 of 28 Date: 12/20/2021 3:20 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.3 Site Preparation - 2022

Mitigated Construction On-Site

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Fugitive Dust					0.4136	0.0000	0.4136	0.0447	0.0000	0.0447			0.0000			0.0000
Off-Road	0.7949	8.4865	4.2062	9.7300e- 003		0.4254	0.4254	 	0.3914	0.3914	0.0000	942.5966	942.5966	0.3049		950.2180
Total	0.7949	8.4865	4.2062	9.7300e- 003	0.4136	0.4254	0.8390	0.0447	0.3914	0.4360	0.0000	942.5966	942.5966	0.3049		950.2180

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0181	0.0133	0.1725	4.8000e- 004	0.0559	3.3000e- 004	0.0562	0.0148	3.1000e- 004	0.0151		48.4653	48.4653	1.3500e- 003	1.3000e- 003	48.8859
Total	0.0181	0.0133	0.1725	4.8000e- 004	0.0559	3.3000e- 004	0.0562	0.0148	3.1000e- 004	0.0151		48.4653	48.4653	1.3500e- 003	1.3000e- 003	48.8859

CalEEMod Version: CalEEMod.2020.4.0 Page 13 of 28 Date: 12/20/2021 3:20 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Grading - 2022

Unmitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Fugitive Dust					7.6428	0.0000	7.6428	3.4865	0.0000	3.4865			0.0000			0.0000
Off-Road	1.6320	17.2802	7.7882	0.0183		0.8428	0.8428		0.7754	0.7754		1,769.632 0	1,769.632 0	0.5723	 	1,783.940 3
Total	1.6320	17.2802	7.7882	0.0183	7.6428	0.8428	8.4856	3.4865	0.7754	4.2619		1,769.632 0	1,769.632 0	0.5723		1,783.940 3

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Hauling	0.1356	5.3749	1.2536	0.0200	0.5772	0.0431	0.6204	0.1582	0.0413	0.1995		2,191.481 3	2,191.481 3	0.1175	0.3479	2,298.092 0
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0290	0.0212	0.2761	7.6000e- 004	0.0894	5.3000e- 004	0.0900	0.0237	4.9000e- 004	0.0242		77.5444	77.5444	2.1600e- 003	2.0800e- 003	78.2174
Total	0.1646	5.3961	1.5296	0.0207	0.6667	0.0437	0.7103	0.1819	0.0418	0.2237		2,269.025 7	2,269.025 7	0.1196	0.3500	2,376.309 4

CalEEMod Version: CalEEMod.2020.4.0 Page 14 of 28 Date: 12/20/2021 3:20 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.4 Grading - 2022

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Fugitive Dust					2.9807	0.0000	2.9807	1.3598	0.0000	1.3598			0.0000			0.0000
Off-Road	1.6320	17.2802	7.7882	0.0183		0.8428	0.8428		0.7754	0.7754	0.0000	1,769.632 0	1,769.632 0	0.5723		1,783.940 3
Total	1.6320	17.2802	7.7882	0.0183	2.9807	0.8428	3.8235	1.3598	0.7754	2.1351	0.0000	1,769.632 0	1,769.632 0	0.5723		1,783.940 3

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Hauling	0.1356	5.3749	1.2536	0.0200	0.5772	0.0431	0.6204	0.1582	0.0413	0.1995		2,191.481 3	2,191.481 3	0.1175	0.3479	2,298.092 0
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0290	0.0212	0.2761	7.6000e- 004	0.0894	5.3000e- 004	0.0900	0.0237	4.9000e- 004	0.0242		77.5444	77.5444	2.1600e- 003	2.0800e- 003	78.2174
Total	0.1646	5.3961	1.5296	0.0207	0.6667	0.0437	0.7103	0.1819	0.0418	0.2237		2,269.025 7	2,269.025 7	0.1196	0.3500	2,376.309 4

CalEEMod Version: CalEEMod.2020.4.0 Page 15 of 28 Date: 12/20/2021 3:20 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Building Construction - 2022 <u>Unmitigated Construction On-Site</u>

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Off-Road	0.9296	9.6454	8.6757	0.0151		0.4937	0.4937		0.4542	0.4542		1,457.369 9	1,457.369 9	0.4713		1,469.153 5
Total	0.9296	9.6454	8.6757	0.0151		0.4937	0.4937		0.4542	0.4542		1,457.369 9	1,457.369 9	0.4713		1,469.153 5

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/o	day							lb/d	day		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0107	0.2914	0.0992	1.1500e- 003	0.0384	2.9300e- 003	0.0414	0.0111	2.8000e- 003	0.0139		123.4634	123.4634	4.1200e- 003	0.0179	128.9048
Worker	0.1341	0.0981	1.2767	3.5300e- 003	0.4136	2.4700e- 003	0.4160	0.1097	2.2800e- 003	0.1120		358.6430	358.6430	0.0100	9.6000e- 003	361.7554
Total	0.1448	0.3894	1.3759	4.6800e- 003	0.4520	5.4000e- 003	0.4574	0.1207	5.0800e- 003	0.1258		482.1064	482.1064	0.0141	0.0275	490.6602

CalEEMod Version: CalEEMod.2020.4.0 Page 16 of 28 Date: 12/20/2021 3:20 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Building Construction - 2022

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
	0.9296	9.6454	8.6757	0.0151		0.4937	0.4937	1 1 1	0.4542	0.4542	0.0000	1,457.369 9	1,457.369 9	0.4713		1,469.153 5
Total	0.9296	9.6454	8.6757	0.0151		0.4937	0.4937		0.4542	0.4542	0.0000	1,457.369 9	1,457.369 9	0.4713		1,469.153 5

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0107	0.2914	0.0992	1.1500e- 003	0.0384	2.9300e- 003	0.0414	0.0111	2.8000e- 003	0.0139		123.4634	123.4634	4.1200e- 003	0.0179	128.9048
Worker	0.1341	0.0981	1.2767	3.5300e- 003	0.4136	2.4700e- 003	0.4160	0.1097	2.2800e- 003	0.1120		358.6430	358.6430	0.0100	9.6000e- 003	361.7554
Total	0.1448	0.3894	1.3759	4.6800e- 003	0.4520	5.4000e- 003	0.4574	0.1207	5.0800e- 003	0.1258		482.1064	482.1064	0.0141	0.0275	490.6602

CalEEMod Version: CalEEMod.2020.4.0 Page 17 of 28 Date: 12/20/2021 3:20 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Building Construction - 2023 <u>Unmitigated Construction On-Site</u>

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
	0.8592	8.8062	8.5866	0.0151		0.4296	0.4296		0.3952	0.3952		1,458.033 9	1,458.033 9	0.4716		1,469.822 8
Total	0.8592	8.8062	8.5866	0.0151		0.4296	0.4296		0.3952	0.3952		1,458.033 9	1,458.033 9	0.4716		1,469.822 8

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	6.3500e- 003	0.2286	0.0885	1.0900e- 003	0.0384	1.2700e- 003	0.0397	0.0111	1.2200e- 003	0.0123		117.8312	117.8312	3.9300e- 003	0.0171	123.0174
Worker	0.1248	0.0868	1.1777	3.4100e- 003	0.4136	2.3300e- 003	0.4159	0.1097	2.1400e- 003	0.1118		349.2241	349.2241	9.0000e- 003	8.8700e- 003	352.0925
Total	0.1311	0.3154	1.2663	4.5000e- 003	0.4520	3.6000e- 003	0.4556	0.1207	3.3600e- 003	0.1241		467.0553	467.0553	0.0129	0.0259	475.1099

CalEEMod Version: CalEEMod.2020.4.0 Page 18 of 28 Date: 12/20/2021 3:20 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.5 Building Construction - 2023

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
	0.8592	8.8062	8.5866	0.0151		0.4296	0.4296	 	0.3952	0.3952	0.0000	1,458.033 9	1,458.033 9	0.4716		1,469.822 8
Total	0.8592	8.8062	8.5866	0.0151		0.4296	0.4296		0.3952	0.3952	0.0000	1,458.033 9	1,458.033 9	0.4716		1,469.822 8

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	6.3500e- 003	0.2286	0.0885	1.0900e- 003	0.0384	1.2700e- 003	0.0397	0.0111	1.2200e- 003	0.0123		117.8312	117.8312	3.9300e- 003	0.0171	123.0174
Worker	0.1248	0.0868	1.1777	3.4100e- 003	0.4136	2.3300e- 003	0.4159	0.1097	2.1400e- 003	0.1118		349.2241	349.2241	9.0000e- 003	8.8700e- 003	352.0925
Total	0.1311	0.3154	1.2663	4.5000e- 003	0.4520	3.6000e- 003	0.4556	0.1207	3.3600e- 003	0.1241		467.0553	467.0553	0.0129	0.0259	475.1099

CalEEMod Version: CalEEMod.2020.4.0 Page 19 of 28 Date: 12/20/2021 3:20 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.6 Paving - 2023
<u>Unmitigated Construction On-Site</u>

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Off-Road	0.7320	6.5013	8.2001	0.0133		0.3102	0.3102		0.2900	0.2900		1,212.966 8	1,212.966 8	0.3479		1,221.664 9
Paving	0.0000					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	0.7320	6.5013	8.2001	0.0133		0.3102	0.3102		0.2900	0.2900		1,212.966 8	1,212.966 8	0.3479		1,221.664 9

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0607	0.0422	0.5730	1.6600e- 003	0.2012	1.1300e- 003	0.2023	0.0534	1.0400e- 003	0.0544		169.8928	169.8928	4.3800e- 003	4.3200e- 003	171.2882
Total	0.0607	0.0422	0.5730	1.6600e- 003	0.2012	1.1300e- 003	0.2023	0.0534	1.0400e- 003	0.0544		169.8928	169.8928	4.3800e- 003	4.3200e- 003	171.2882

CalEEMod Version: CalEEMod.2020.4.0 Page 20 of 28 Date: 12/20/2021 3:20 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.6 Paving - 2023

<u>Mitigated Construction On-Site</u>

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
Off-Road	0.7320	6.5013	8.2001	0.0133		0.3102	0.3102		0.2900	0.2900	0.0000	1,212.966 8	1,212.966 8	0.3479		1,221.664 9
Paving	0.0000					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Total	0.7320	6.5013	8.2001	0.0133		0.3102	0.3102		0.2900	0.2900	0.0000	1,212.966 8	1,212.966 8	0.3479		1,221.664 9

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0607	0.0422	0.5730	1.6600e- 003	0.2012	1.1300e- 003	0.2023	0.0534	1.0400e- 003	0.0544		169.8928	169.8928	4.3800e- 003	4.3200e- 003	171.2882
Total	0.0607	0.0422	0.5730	1.6600e- 003	0.2012	1.1300e- 003	0.2023	0.0534	1.0400e- 003	0.0544		169.8928	169.8928	4.3800e- 003	4.3200e- 003	171.2882

CalEEMod Version: CalEEMod.2020.4.0 Page 21 of 28 Date: 12/20/2021 3:20 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.7 Architectural Coating - 2023 <u>Unmitigated Construction On-Site</u>

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Archit. Coating	65.0754					0.0000	0.0000		0.0000	0.0000		i i i	0.0000			0.0000
Off-Road	0.2556	1.7373	2.4148	3.9600e- 003		0.0944	0.0944		0.0944	0.0944		375.2641	375.2641	0.0225		375.8253
Total	65.3310	1.7373	2.4148	3.9600e- 003		0.0944	0.0944		0.0944	0.0944		375.2641	375.2641	0.0225		375.8253

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0236	0.0164	0.2228	6.5000e- 004	0.0782	4.4000e- 004	0.0787	0.0208	4.1000e- 004	0.0212		66.0694	66.0694	1.7000e- 003	1.6800e- 003	66.6121
Total	0.0236	0.0164	0.2228	6.5000e- 004	0.0782	4.4000e- 004	0.0787	0.0208	4.1000e- 004	0.0212		66.0694	66.0694	1.7000e- 003	1.6800e- 003	66.6121

CalEEMod Version: CalEEMod.2020.4.0 Page 22 of 28 Date: 12/20/2021 3:20 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

3.7 Architectural Coating - 2023

Mitigated Construction On-Site

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
Archit. Coating	65.0754					0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Off-Road	0.2556	1.7373	2.4148	3.9600e- 003		0.0944	0.0944	 	0.0944	0.0944	0.0000	375.2641	375.2641	0.0225		375.8253
Total	65.3310	1.7373	2.4148	3.9600e- 003		0.0944	0.0944		0.0944	0.0944	0.0000	375.2641	375.2641	0.0225		375.8253

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	lay		
Hauling	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Vendor	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000	0.0000		0.0000	0.0000	0.0000	0.0000	0.0000
Worker	0.0236	0.0164	0.2228	6.5000e- 004	0.0782	4.4000e- 004	0.0787	0.0208	4.1000e- 004	0.0212		66.0694	66.0694	1.7000e- 003	1.6800e- 003	66.6121
Total	0.0236	0.0164	0.2228	6.5000e- 004	0.0782	4.4000e- 004	0.0787	0.0208	4.1000e- 004	0.0212		66.0694	66.0694	1.7000e- 003	1.6800e- 003	66.6121

CalEEMod Version: CalEEMod.2020.4.0 Page 23 of 28 Date: 12/20/2021 3:20 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

4.0 Operational Detail - Mobile

4.1 Mitigation Measures Mobile

	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/d	day		
Mitigated	0.6954	0.8466	7.1428	0.0159	1.6997	0.0118	1.7115	0.4529	0.0110	0.4639		1,634.964 1	1,634.964 1	0.1057	0.0724	1,659.192 9
Ommagatou	0.6954	0.8466	7.1428	0.0159	1.6997	0.0118	1.7115	0.4529	0.0110	0.4639		1,634.964 1	1,634.964 1	0.1057	0.0724	1,659.192 9

4.2 Trip Summary Information

	Ave	rage Daily Trip Ra	ite	Unmitigated	Mitigated
Land Use	Weekday	Saturday	Sunday	Annual VMT	Annual VMT
Apartments Mid Rise	236.08	213.20	177.32	766,867	766,867
Total	236.08	213.20	177.32	766,867	766,867

4.3 Trip Type Information

		Miles			Trip %			Trip Purpos	e %
Land Use	H-W or C-W	H-S or C-C	H-O or C-NW	H-W or C-W	H-S or C-C	H-O or C-NW	Primary	Diverted	Pass-by
Apartments Mid Rise	14.70	5.90	8.70	40.20	19.20	40.60	86	11	3

4.4 Fleet Mix

Land Use	LDA	LDT1	LDT2	MDV	LHD1	LHD2	MHD	HHD	OBUS	UBUS	MCY	SBUS	МН
Apartments Mid Rise	0.543139	0.060749	0.184760	0.130258	0.023830	0.006353	0.011718	0.009137	0.000812	0.000509	0.024193	0.000750	0.003791

CalEEMod Version: CalEEMod.2020.4.0 Page 24 of 28 Date: 12/20/2021 3:20 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.0 Energy Detail

Historical Energy Use: N

5.1 Mitigation Measures Energy

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	lay							lb/d	day		
NaturalGas Mitigated	0.0201	0.1716	0.0730	1.1000e- 003		0.0139	0.0139		0.0139	0.0139		219.0049	219.0049	4.2000e- 003	4.0200e- 003	220.3063
NaturalGas Unmitigated	0.0201	0.1716	0.0730	1.1000e- 003		0.0139	0.0139		0.0139	0.0139		219.0049	219.0049	4.2000e- 003	4.0200e- 003	220.3063

5.2 Energy by Land Use - NaturalGas

Unmitigated

	NaturalGa s Use	ROG	NOx	СО	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr					lb/d	day							lb/c	lay		
Apartments Mid Rise	1861.54	0.0201	0.1716	0.0730	1.1000e- 003		0.0139	0.0139		0.0139	0.0139		219.0049	219.0049	4.2000e- 003	4.0200e- 003	220.3063
Total		0.0201	0.1716	0.0730	1.1000e- 003		0.0139	0.0139		0.0139	0.0139		219.0049	219.0049	4.2000e- 003	4.0200e- 003	220.3063

CalEEMod Version: CalEEMod.2020.4.0 Page 25 of 28 Date: 12/20/2021 3:20 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

5.2 Energy by Land Use - NaturalGas

Mitigated

	NaturalGa s Use	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Land Use	kBTU/yr					lb/d	day							lb/c	lay		
Apartments Mid Rise	1.86154	0.0201	0.1716	0.0730	1.1000e- 003] 	0.0139	0.0139		0.0139	0.0139		219.0049	219.0049	4.2000e- 003	4.0200e- 003	220.3063
Total		0.0201	0.1716	0.0730	1.1000e- 003		0.0139	0.0139		0.0139	0.0139		219.0049	219.0049	4.2000e- 003	4.0200e- 003	220.3063

6.0 Area Detail

6.1 Mitigation Measures Area

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
Category					lb/d	day							lb/c	lay		
Mitigated	1.3389	0.8258	4.6214	5.1800e- 003		0.0865	0.0865		0.0865	0.0865	0.0000	998.7835	998.7835	0.0264	0.0182	1,004.858 6
Unmitigated	1.3389	0.8258	4.6214	5.1800e- 003		0.0865	0.0865		0.0865	0.0865	0.0000	998.7835	998.7835	0.0264	0.0182	1,004.858 6

14480 Whittier Resdiential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.2 Area by SubCategory

Unmitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory					lb/d	day							lb/d	day		
Architectural Coating	0.0891					0.0000	0.0000	 	0.0000	0.0000			0.0000			0.0000
	1.0296					0.0000	0.0000		0.0000	0.0000		!	0.0000		 	0.0000
Hearth	0.0909	0.7763	0.3304	4.9600e- 003		0.0628	0.0628		0.0628	0.0628	0.0000	991.0588	991.0588	0.0190	0.0182	996.9482
Landscaping	0.1293	0.0495	4.2910	2.3000e- 004		0.0238	0.0238		0.0238	0.0238		7.7247	7.7247	7.4300e- 003		7.9104
Total	1.3389	0.8258	4.6214	5.1900e- 003		0.0865	0.0865		0.0865	0.0865	0.0000	998.7835	998.7835	0.0264	0.0182	1,004.858 6

CalEEMod Version: CalEEMod.2020.4.0 Page 27 of 28 Date: 12/20/2021 3:20 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

6.2 Area by SubCategory

Mitigated

	ROG	NOx	CO	SO2	Fugitive PM10	Exhaust PM10	PM10 Total	Fugitive PM2.5	Exhaust PM2.5	PM2.5 Total	Bio- CO2	NBio- CO2	Total CO2	CH4	N2O	CO2e
SubCategory					lb/d	day							lb/d	day		
Architectural Coating	0.0891					0.0000	0.0000	 	0.0000	0.0000			0.0000			0.0000
Consumer Products	1.0296				 	0.0000	0.0000		0.0000	0.0000			0.0000			0.0000
Hearth	0.0909	0.7763	0.3304	4.9600e- 003	 	0.0628	0.0628		0.0628	0.0628	0.0000	991.0588	991.0588	0.0190	0.0182	996.9482
Landscaping	0.1293	0.0495	4.2910	2.3000e- 004	 	0.0238	0.0238	 	0.0238	0.0238		7.7247	7.7247	7.4300e- 003		7.9104
Total	1.3389	0.8258	4.6214	5.1900e- 003		0.0865	0.0865		0.0865	0.0865	0.0000	998.7835	998.7835	0.0264	0.0182	1,004.858 6

7.0 Water Detail

7.1 Mitigation Measures Water

CalEEMod Version: CalEEMod.2020.4.0 Page 28 of 28 Date: 12/20/2021 3:20 PM

14480 Whittier Resdiential - South Coast AQMD Air District, Winter

EMFAC Off-Model Adjustment Factors for Gasoline Light Duty Vehicle to Account for the SAFE Vehicle Rule Applied

8.0 Waste Detail

8.1 Mitigation Measures Waste

9.0 Operational Offroad

Equipment Type	Number	Hours/Day	Days/Year	Horse Power	Load Factor	Fuel Type
----------------	--------	-----------	-----------	-------------	-------------	-----------

10.0 Stationary Equipment

Fire Pumps and Emergency Generators

Equipment Type	Number	Hours/Day	Hours/Year	Horse Power	Load Factor	Fuel Type
----------------	--------	-----------	------------	-------------	-------------	-----------

Boilers

Equipment Type	Number	Heat Input/Day	Heat Input/Year	Boiler Rating	Fuel Type

User Defined Equipment

Equipment Type	Number

11.0 Vegetation

This page intentionally left blank.

